


# PCM 606560 E

## Dimensions

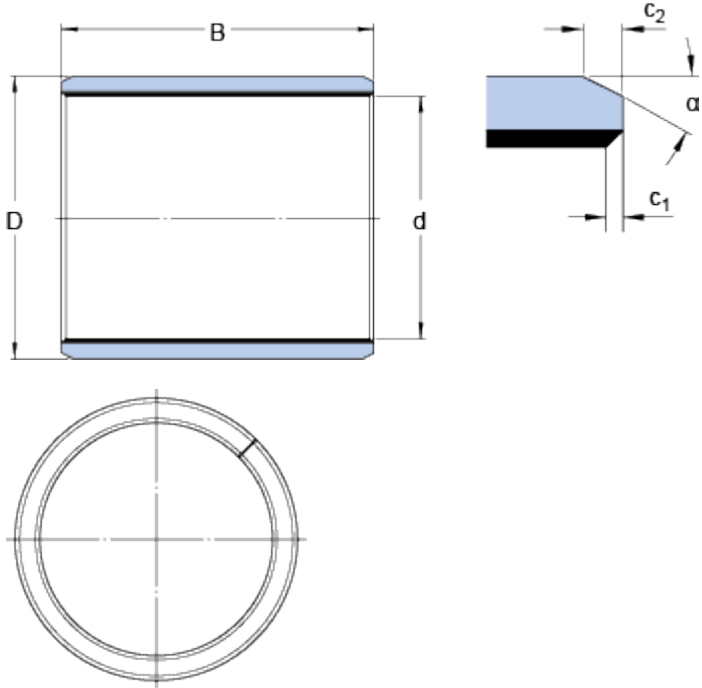

d		<b>60</b>	mm
D		<b>65</b>	mm
B		<b>60</b>	mm
c <sub>1</sub>	min.	<b>0.2</b>	mm
c <sub>1</sub>	max.	<b>1</b>	mm
c <sub>2</sub>	min.	<b>1.2</b>	mm
c <sub>2</sub>	max.	<b>2.4</b>	mm
α		<b>± 8 20</b>	°

## Recommended fits

Tolerance shaft	<b>f 7</b>
Tolerance housing	<b>H 7</b>

## Calculation data

Basic dynamic load rating - radial direction	C	<b>285</b>	kN
Basic static load rating - radial direction	C <sub>0</sub>	<b>880</b>	kN
Specific dynamic load factor	K	<b>80</b>	N/mm <sup>2</sup>
Specific static load factor	K <sub>0</sub>	<b>250</b>	N/mm <sup>2</sup>
Factor depending on material and bearing type	K <sub>M</sub>	<b>480</b>	
Permissible sliding velocity	v	min. <b>0</b>	m/s
Permissible sliding velocity	v	max. <b>2</b>	m/s
Coefficient of friction	μ	min. <b>0.03</b>	
Coefficient of friction	μ	max. <b>0.25</b>	

## Mass

Mass bushing	<b>0.22</b>	kg
--------------	-------------	----

