



DC/DC CONVERTER PU-600

12V / 24V 600W




Input voltage [VDC]:	10÷24
Output voltage [VDC]:	24
Power [W]:	600
Maximum continuous current [A]:	24
Overload protection [A]:	42
Fail protection type [A]:	45
Thermal protection:	NO
Overvoltage protection [V]:	NO
Stand by current:	<100mA
Output voltage ripple:	<50mV
Input voltage ripple:	<50mV
Operating temperature range:	-25 ~ +55°C
Galvanic isolation:	NO
Efficiency:	92%
Cooling type:	Activ
Connection:	Terminal block M4
Housing:	Aluminium
IP67 protection:	NO
Dimensions LxBxH [mm]:	375x88x50
Weight [g]:	1380
Safety:	EN 60950
Emission:	EN 55014-1
Immunity:	EN 55014-2
Product code:	6002401

- Increasing voltage
- can be connected in parallel
- available in other output voltages (supplied to order)



TYP. CURRENT LIMITED CURVE

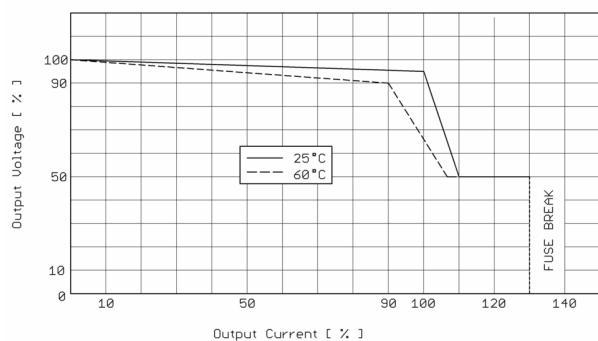

PU series

ISO 9001

