

- Wide 2:1 input voltage range
- Compact SIP-8 package
- Cost optimized design
- Temperature range -40°C to $+85^{\circ}\text{C}$
- I/O isolation 1000 VDC
- Remote On/Off control
- Fully RoHS compliant
- 3-year product warranty



The TMR 2E series is a family of isolated 2 W DC/DC converter modules with regulated output, featuring wide 2:1 input voltage ranges. The product comes in a compact SIP-8 plastic package with small footprint occupying only 2.0 cm² (0.3 square in.) of board space.

An excellent efficiency allows -40°C to $+85^{\circ}\text{C}$ operation temperature. Further features include remote On/Off control and continuous short circuit protection. The compact dimensions and cost optimized design make this converters an ideal solution for applications in communication equipment, instrumentation and industrial electronics.

Models				
Order Code	Input Voltage Range	Output Voltage nom.	Output Current max.	Efficiency typ.
TMR 2-0510E	4.5 - 9 VDC (5 VDC nom.)	3.3 VDC	500 mA	70 %
TMR 2-0511E		5 VDC	400 mA	73 %
TMR 2-0512E		12 VDC	167 mA	75 %
TMR 2-1210E	9 - 18 VDC (12 VDC nom.)	3.3 VDC	500 mA	73 %
TMR 2-1211E		5 VDC	400 mA	77 %
TMR 2-1212E		12 VDC	167 mA	80 %
TMR 2-2410E	18 - 36 VDC (24 VDC nom.)	3.3 VDC	500 mA	72 %
TMR 2-2411E		5 VDC	400 mA	77 %
TMR 2-2412E		12 VDC	167 mA	81 %
TMR 2-4810E	36 - 75 VDC (48 VDC nom.)	3.3 VDC	500 mA	71 %
TMR 2-4811E		5 VDC	400 mA	73 %
TMR 2-4812E		12 VDC	167 mA	79 %

Input Specifications

Input Current	- at no load	5 Vin models: 40 mA typ. 12 Vin models: 20 mA typ. 24 Vin models: 10 mA typ. 48 Vin models: 8 mA typ.
	- at full load	5 Vin models: 520 mA typ. 12 Vin models: 200 mA typ. 24 Vin models: 100 mA typ. 48 Vin models: 50 mA typ.
Surge Voltage		5 Vin models: 15 VDC max. (1 s max.) 12 Vin models: 25 VDC max. (1 s max.) 24 Vin models: 50 VDC max. (1 s max.) 48 Vin models: 100 VDC max. (1 s max.)
Start-up Voltage		5 Vin models: 3.5 VDC / 4 VDC typ. 12 Vin models: 4.5 VDC / 7 VDC typ. 24 Vin models: 8 VDC / 12 VDC typ. 48 Vin models: 16 VDC / 24 VDC typ.
Under Voltage Lockout		5 Vin models: 3.5 VDC typ. / 4 VDC max. 12 Vin models: 6.5 VDC typ. / 8.5 VDC max. 24 Vin models: 11 VDC typ. / 17 VDC max. 48 Vin models: 22 VDC typ. / 34 VDC max.
Reflected Ripple Current		5 Vin models: 400 mAp-p typ. 12 Vin models: 300 mAp-p typ. 24 Vin models: 200 mAp-p typ. 48 Vin models: 500 mAp-p typ.
Input Filter		Internal Capacitor

Output Specifications

Voltage Set Accuracy		±2% max.
Regulation	- Input Variation (Vmin - Vmax)	0.5% max.
	- Load Variation (25 - 100%)	0.75% max.
Ripple and Noise	- 20 MHz Bandwidth	50 mVp-p max.
		30 mVp-p typ.
Capacitive Load	3.3 Vout models:	2'200 µF max.
	5 Vout models:	1'000 µF max.
	12 Vout models:	170 µF max.
Minimum Load		25 % of Iout max.
Temperature Coefficient		±0.02 %/K max.
Short Circuit Protection		Continuous, Automatic recovery
Transient Response	- Response Deviation	5% max. (75% to 100% Load Step)
	- Response Time	100 µs typ. / 300 µs max. (75% to 100% Load Step)

Safety Specifications

Safety Standards	- IT / Multimedia Equipment	Designed for EN 60950-1 (no certification)
------------------	-----------------------------	---

EMC Specifications

EMC Emissions	- Conducted Emissions	EN 55032 class A (with external filter) FCC Part 15, class A
	- Radiated Emissions	EN 55032 class A (with external filter) FCC Part 15, class A
	- External Filter Proposal	www.tracopower.com/overview/tmr2e

General Specifications

Relative Humidity		95% max. (non condensing)
-------------------	--	----------------------------------

All specifications valid at nominal input voltage, full load and +25°C after warm-up time unless otherwise stated.

Temperature Ranges	- Operating Temperature - Case Temperature - Storage Temperature	-40°C to +85°C +90°C max. -55°C to +105°C
Power Derating	- High Temperature	2.86 %/K above 65°C
Cooling System		Natural convection (20 LFM)
Switching Frequency		100 - 650 kHz 300 kHz typ.
Insulation System		Functional Insulation
Isolation Test Voltage	- Input to Output, 60 s - Input to Output, 1 s	1'000 VDC 1'200 VDC
Isolation Resistance	- Input to Output, 500 VDC	1'000 MOhm min.
Isolation Capacitance	- Input to Output, 100 kHz, 1 V	65 pF typ. 120 pF max.
Reliability	- Calculated MTBF	1'000'000 h (MIL-HDBK-217F, ground benign)
Housing Material		Non-conductive Plastic (UL94 V-0 rated)
Pin Material		Nickel-Iron (Alloy 42)
Connection Type		THD (Through-Hole Device)
Weight		4.8 g
Remote Control	- Voltage Controlled Remote - Off Idle Input Current - Remote Pin Input Current	On: < 0.6 VDC or open circuit Off: 2.7 to 15 VDC Refers to 'Remote' and '-Vin' Pin 0.2 mA max. -0.4 to 1.0 mA
Environmental Compliance	- Reach - RoHS	www.tracopower.com/info/reach-declaration.pdf www.tracopower.com/info/rohs-declaration.pdf


Supporting Documents

Overview Link (for additional Documents)

www.tracopower.com/overview/tmr2e

All specifications valid at nominal input voltage, full load and +25°C after warm-up time unless otherwise stated.

Outline Dimensions

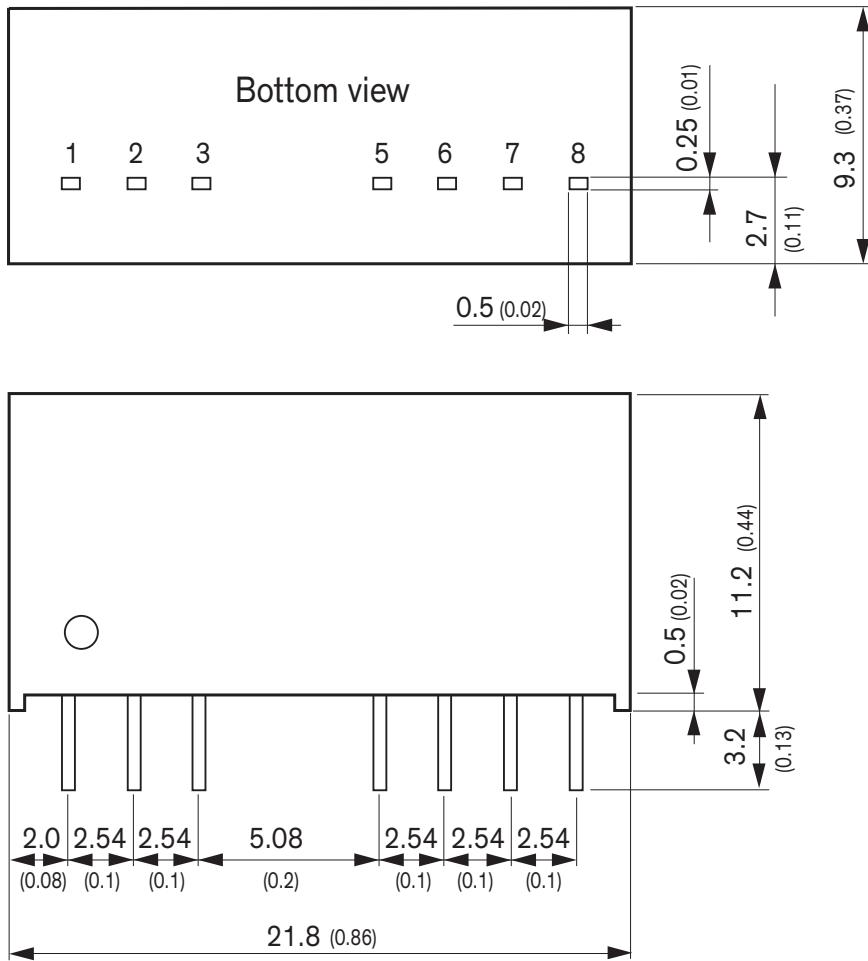

Pinout	
Pin	Function
1	-Vin (GND)
2	+Vin (Vcc)
4	Remote
5	NC
6	+Vout
7	-Vout
8	NC

NC: Pin to be isolated from circuitry

Dimensions in mm (inch)
 Tolerances: ± 0.5 (± 0.02)
 Pin pitch Tolerance ± 0.25 (± 0.01)