

Operation Instructions of Controller

I. Specifications:


Working temperature: -20~50°C
 Product size: L62xW35xH23mm
 Net weight:50g
 Max load current: 2A each color
 Supply voltage: DC12V
 Package size: L105xW65xH55mm
 Gross weight:70g
 Connecting Mode: Common anode

II. Control Method:

Adopt IR remote to control the led controller, which has 24 buttons,the function of each button as the table below:

Brightness * (Speed up)	Brightness- (Speed down)	Off	On
Static red	Static green	Static blue	Static white
Static orange	Static Red green	Static dark blue	7 color jumpy change
Static cyan yellow	Static cyan	Static brown	All color on/off led in
Static yellow	Static light blue	Static pink	7 color fade change
Static straw yellow	Static sky blue	Static purple	3 base color jumpy

III. Panel specification and connecting drawing as follows:

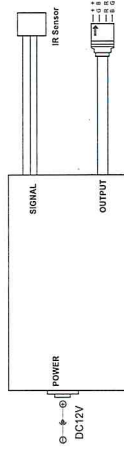

IV. Warning:

1. Supply voltage of this product is DC12V never connect to DC24V or AC220V.
2. Never connect two wires directly in case of short circuit.
3. Lead wire should be connected correctly according to colors that connecting diagram offers.
4. Warranty of this product is one year. In this period we guarantee replacement or repairing with no charge, but exclude the artificial situation of damaged or overheat working.