


SKINTOP® BS

SKINTOP® BS, polyamide cable gland with bending and anti-kink protection, to protect flexible cables, for moving machine parts



Variety of approval certifications

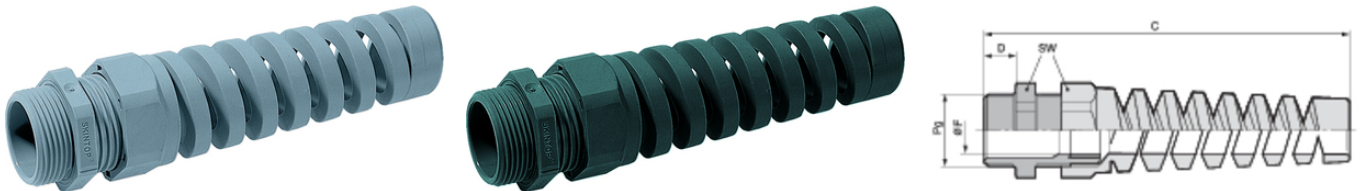

Temperature-resistant



Optimum strain relief



Mechanical resistance



Wide clamping range



Good chemical resistance

Benefits

Reliable bending and anti-kink protection

Cable conservation

Functional reliability

To protect flexible cables

SKINTOP® BS

Application range

Cables for electrical appliances and machinery that are moved under normal use must be protected against excessive bending as required in accordance with VDE 0700-1

Handheld device

Robotics industry

Light and sound applications

Moving machine parts

Norm references / Approvals

UL File Nr. E79903

Product Make-up

PG connection thread

Note

Refer to SKINTOP® PG accessories for suitable accessories

Counter nut to be used: SKINTOP® GMP-GL

Version with smaller insert to seal smaller cable cross-sections, SKINTOP® BSR, is available upon request

Technical Data

Classification:	ETIM 5.0 Class-ID: EC000441 ETIM 5.0 Class-Description: Cable screw gland
Caution:	Refer to Appendix T21 for the installation dimensions and torques
Colour delivered:	Silver grey (RAL 7001) Black (RAL 9005), UV-resistant
Material:	Body: Polyamide Seal: CR
Protection rating:	IP 68 - 5 bar
Temperature range:	-20°C to +100°C

Note

Photographs are not to scale and do not represent detailed images of the respective products.

* Prices are net prices without VAT and surcharges. Sale to business customers.

**SKINTOP® BS**

Article number	Article designation / size	Clamping range ØF (mm)	SW wrench size mm	Overall length, C (mm)	Thread length, D (mm)
SKINTOP® BS silver grey					
53015600	BS 7	2.5 - 6.5	15	62	8
53015610	BS 9	3.5 - 8	19	73.5	8
53015620	BS 11	4 - 10	22	86	8
53015630	BS 13,5	6 - 12	24	98	9
53015640	BS 16	9 - 14	27	111.5	10
53015650	BS 21	13 - 18	33	129	11
SKINTOP® BS black					
53015800	BS 7	2.5 - 6.5	15	62	8
53015810	BS 9	3.5 - 8	19	73.5	8
53015820	BS 11	4 - 10	22	86	8
53015830	BS 13,5	6 - 12	24	98	9
53015840	BS 16	9 - 14	27	111.5	10
53015850	BS 21	13 - 18	33	129	11

Last Update (30.08.2016)

©2016 Lapp Group - Technical changes reserved

Product Management www.lappkabel.deYou can find the current technical data in the corresponding data sheet.
PN 0456 / 02_03_16