




## Swing® 5300 Rechargeable Lithium-ion Cell

Boston-Power's Swing 5300 offers the highest usable energy density combined with a longer cycle life at broad operating temperatures and unmatched safety features. It is ideal for a wide range of applications including Battery Electric Vehicles (BEVs), Plug-in Hybrid Electric Vehicles (PHEV), Light Commercial Vehicles (LCV), Neighborhood Electric Vehicles (NEV), and Stationary Energy Storage.

### Specifications

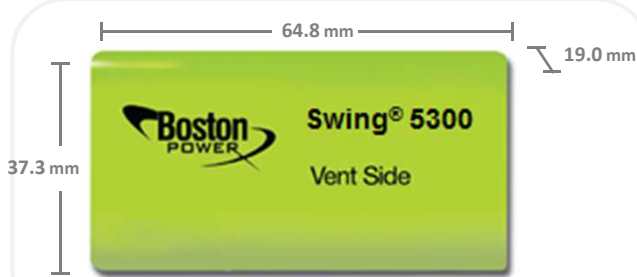


### Certifications

UN 38.3, UL1642, IEC 62133, ROHS 2002/95/EC  
Nordic Ecolabel 330011


Nominal capacity <sup>1</sup>		5300 mAh
Nominal energy <sup>1</sup>		19.3 Wh
Nominal voltage		3.65 V
Energy density	Gravimetric	207 Wh/kg
	Volumetric	490 Wh/L
Nominal cell impedance		15.5 mΩ
Cycle life (1C discharge at 23°C)	100% DOD	>1000 cycles
	90% DOD	>2000 cycles
	80% DOD	>3000 cycles
Max continuous discharge rate (0 -100% SOC)		13 A
Allowable 10s pulse capability <sup>2</sup>		1000 W/kg
Standard charging method	Constant current (CC)	3.7A (0.7C) to 4.2V
	Constant voltage (CV)	4.2V to 50 mA
Max charge rate (continuous)		10.6 A
Nominal cell weight		93.5 g
Operating Temperature	Charge	-20 to +60 °C
	Discharge	-40 to +70 °C
Storage Temperature		-40 to +60 °C

<sup>1</sup> Standard discharge 0.2C to 2.75 V  
<sup>2</sup> 50% to 100% SOC


### Cycle Life at 100% Depth of Discharge (DOD)

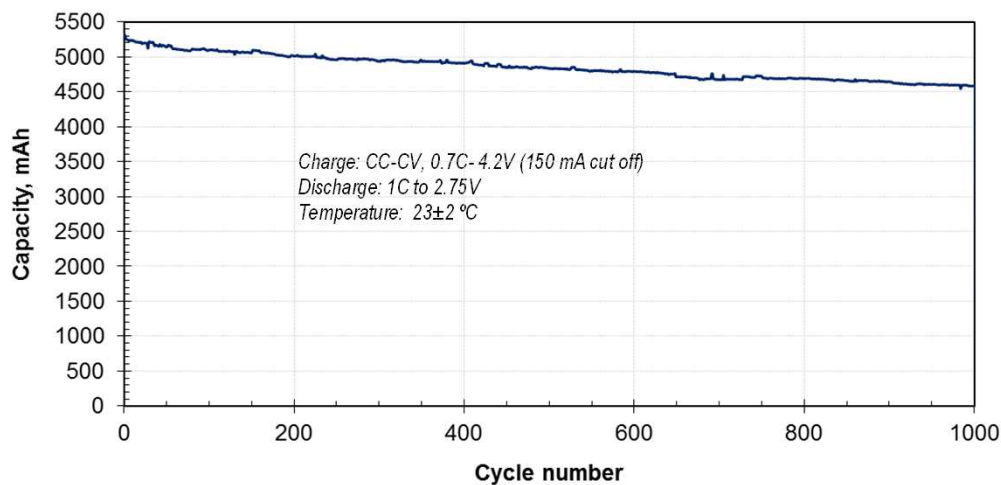


### Discharge Capacity

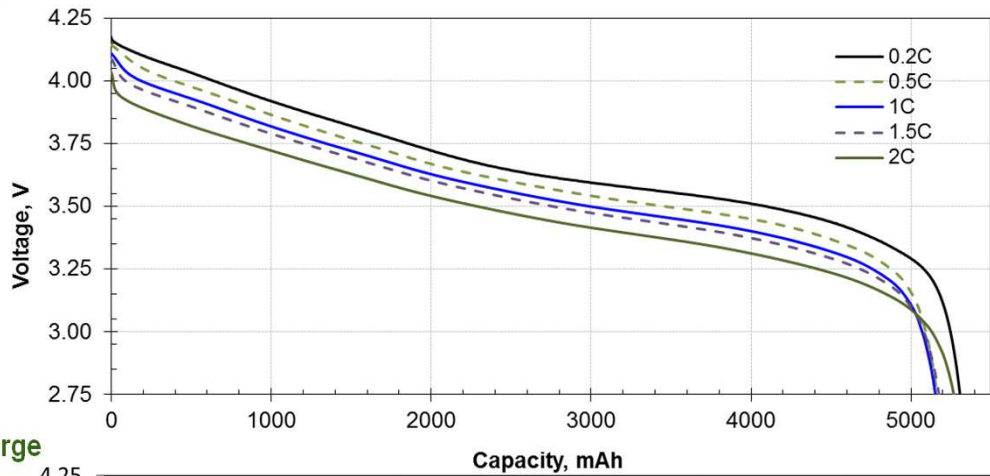

### Temperature Discharge Curve (0.5C)

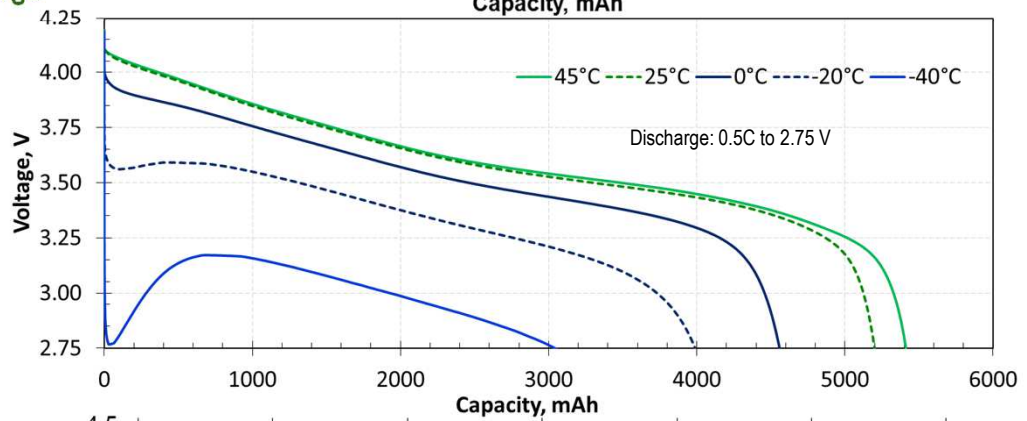

### Charge Curve (0.7C)

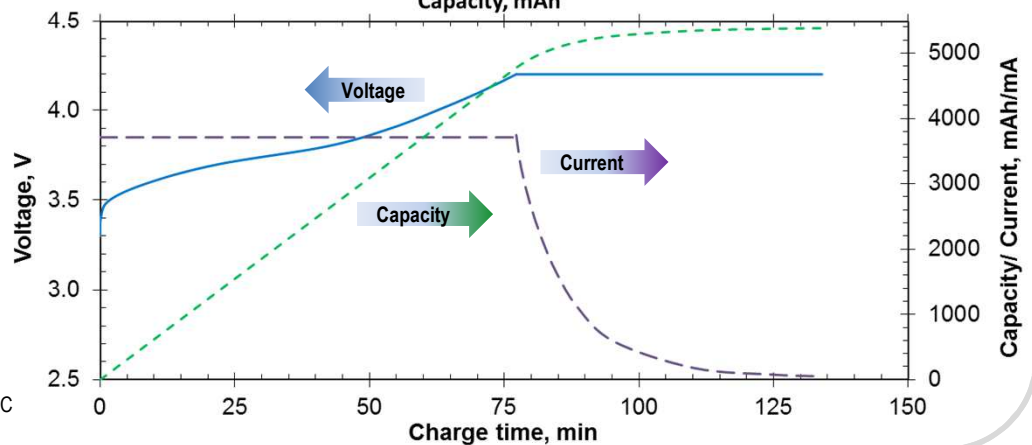

Temperature: 23°C ± 2°C  
Standard Charge

940-0013-001, Rev 01

BOSTON-POWER DATA SHEET: SWING 5300

[www.boston-power.com](http://www.boston-power.com)

**USA**  
Boston-Power, Inc.  
2200 West Park Drive  
Westborough, MA 01581-3961, USA  
Phone: +1.508.366.0885

**China**  
Boston-Power Beijing Technology Center  
Yandong Building  
#2 Wanhong Street (West)  
Beijing 100015 China  
Phone: +86 10 8439 8500

**Taiwan**  
Boston-Power Battery Company Ltd  
Suite C, 13th Floor  
396 Keelung Road, Section 1  
Xinyi District  
Taipei, 11051, Taiwan  
+886 2 2722 3325

Performance may vary depending on, but not limited to cell usage and application. If cells are used outside specifications, performance may diminish. All specifications are subject to change without notice. Some data reflects expected performance for product in development. All information provided herein is believed, but not guaranteed to be accurate.

©2013, Boston-Power, Inc. All rights reserved. No portion of this material may be copied or reproduced, in any manner, without the express written consent of Boston-Power. The Boston-Power logo, Swing, Sonata, Swing Tempo and Swing Key are all trademarks or registered trademarks of Boston-Power, Inc. which retains sole rights to their use.