


DESIGNATION	SIZE/L	Jacket Colour
TEL-4C-02T-BK	2000MM	BK
TEL-4C-01T-BK	1000MM	BK
TEL-4C-02T-WH	2000MM	WH
TEL-4C-07T-BK	7000MM	BK
TEL-4C-07T-WH	7000MM	WH
TEL-4C-07T-IV	7000MM	IV
TEL-4C-01T-IV	1000MM	IV
TEL-4C-01T-WH	1000MM	WH
TEL-4C-05T-BK	5000MM	BK
TEL-4C-05T-WH	5000MM	WH
TEL-4C-05T-IV	5000MM	IV

PIN ASSIGNMENT:

	YL	GR	RD	BK
P1:	1	2	3	4
P2:	4	3	2	1
	YL	GR	RD	BK

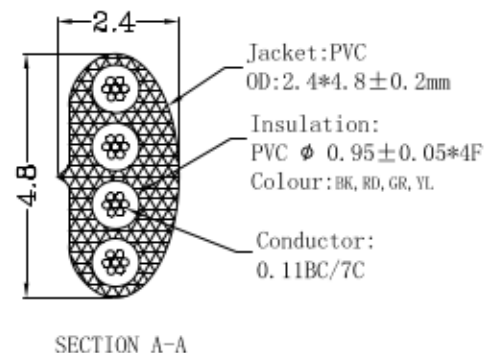

1	Cable (0.11BC/7C+PP:0.95)*4F+PVC:2.4*4.8±0.2MM	A/R	M								
2	Connector RJ11 4P4C FU	2	PCS								
3				TOLERANCE OTHERWISE UNLESS SPECIFIED		DRAWING:	MCXH	TEL-173-4C			
4				UP TO 5	±0.2	REVIEW:	莫玲玲	CLIENT			
5				ABOVE 5-30	±0.3	APPROVED:		TME			
6				ABOVE 30-50	±0.4		NUMBER	###-###-###			
备注:				ABOVE 50	±0.5						
NO	Description	Q'TY	Units	ANGLE	±3°	DATE	2015. 3. 14	SCALE	FREE	UNIT	MM