


MILAN S.r.l. a socio unico

Head Office – Export department:
 Viale Europa, 74
 20090 Cusago (MI) Italy
 T. +39 02 9039.4556-4158
 F. +39 02 9039.4551
 www.taskercables.com

Ufficio Commerciale e Centro Distribuzione
 Viale Europa 72 Strada F12
 20090 Cusago (MI) Italy
 T. +39 02 9039.0037-0059
 F. +39 02 9039.0049
 www.tasker.it

Technical Datasheet **Firestop®**
tasker® TSK 1161 - U.S.B. 2.0
UL AWM STYLE 2725 Cable

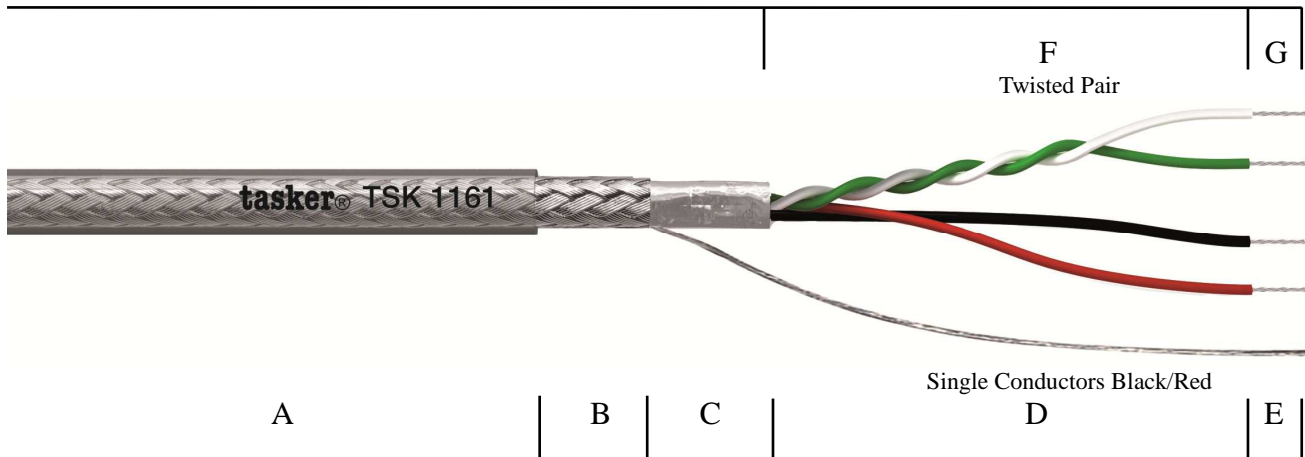

CATEGORY USB Cable (See Audio Catalogue)

- A:** Transparent **Flame Retardant PVC** Sheath. Outer Diam. Ø 4,50 (±0,20) mm.
- B:** First Shield in O.F.C. tinned copper Braid covering 100% + Drain Wire in tinned copper (7x0,13 mm).
- C:** Second Shield in Aluminum/ Mylar tape covering 125%

2x0,14 mm² Conductors:

- D:** The two single conductors are isolated with PVC sheath and colored one black and red – Diam. Ø 1,05 (±0,20) mm.
- E:** Stranded O.F.C. tinned copper Formation 7x0,16 mm. Nom. Cross section 2x0,14 mm²

1x2x0,08 mm² Stranded Pair:

- F:** The twisted pair is isolated with PE sheath colored one White and one Green – Diam. Ø 0,85 (±0,0,20) mm
- G:** Stranded O.F.C. tinned copper Formation 7x0,13 mm. Nom. Cross section 1x2x0,08 mm²



MILAN S.r.l. a socio unico

Head Office – Export department: **Ufficio Commerciale e Centro Distribuzione**
 Viale Europa, 74 Viale Europa 72 Strada F12
 20090 Cusago (MI) Italy 20090 Cusago (MI) Italy
 T. +39 02 9039.4556-4158 T. +39 02 9039.0037-0059
 F. +39 02 9039.4551 F. +39 02 9039.0049
 www.taskercables.com www.tasker.it

MARKING **tasker®** TSK1161 28 AWG – UL – AWM Style 2725 O.F.C. U.S.B. 2.0 Extra Flex Cable
 80°C – 30V FirestoP® VW-1

CUSTOM This product is also available in **L.S.Z.H., PE, PUR**, with or without **Steel Armor**.

Cable Properties

Standard	USB 2.0
UL Style	2725
Max Rated Voltage	30 V
Operative Temperature	-20/+70°C

USE	X	Indoor	Interno Edificio	INSTALLATION	X	Fixed	Fissa	INFORMATION	X	2011/65/EC RoHS Compliant
Impiego	X	Outdoor Limited	Esterno Limitato	Posa	X	Flexible Limited	Flessibilità limitata	Informazioni	X	Ver.B / 10.03.16
		Outdoor Direct Burial	Esterno Interrato		X	Dynamic (Drag Chain)	Mobile in Catena			
				Dynamic (Torsion)	Mobile in Torsione		