

MILAN S.r.l. a socio unico


**Head Office – Export department:**  
 Viale Europa, 74  
 20090 Cusago (MI) Italy  
 T. +39 02 9039.4556-4158  
 F. +39 02 9039.4551  
 www.taskercables.com

**Ufficio Commerciale e Centro Distribuzione**  
 Viale Europa 72 Strada F12  
 20090 Cusago (MI) Italy  
 T. +39 02 9039.0037-0059  
 F. +39 02 9039.0049  
 www.tasker.it

## Technical Datasheet **Firestop®**

### **tasker® TSK 1162 – U.S.B. 3.0**

### **UL AWM STYLE 2725 Cable**

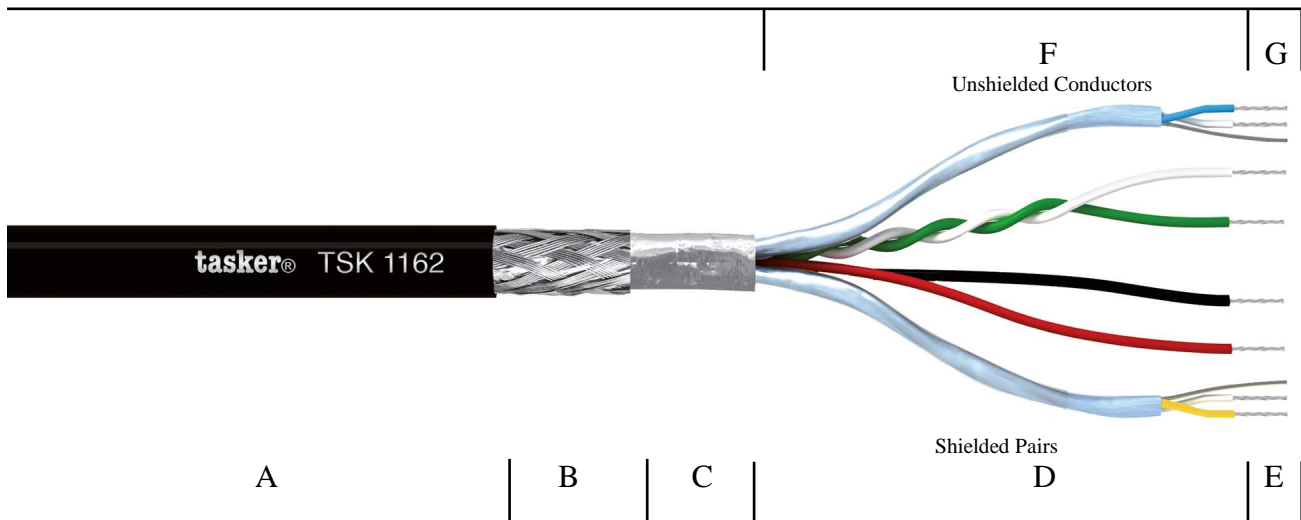

#### **CATEGORY** USB Cable (See Audio Catalogue)

- A:** Black Soft **Flame Retardant PVC** sheath. Outer Diam. Ø 5,80 (±0,20) mm.
- B:** First Shield in O.F.C. tinned copper Braid covering 100% + Drain Wire in tinned copper (7x0,16 mm).
- C:** Second Shield in Aluminum/ Mylar tape covering 125%.

#### **Shielded Pairs**

- D:** The two pairs are singularly shielded with aluminum foil tape, covering 125% + tinned copper Drain wire. Pairs Insulation in High density PE (HDPE) colored one Yellow and white and the other Blue and White. Diam. Ø 0,95 (±0,10) mm.
- E:** Stranded O.F.C. Silver Plated Copper Formation 7x0,13 mm. Nom. Cross section 2x2x0,08 mm<sup>2</sup>.

#### **Unshielded Conductors**

- F:** The twisted pair is isolated with HDPE sheath colored one White and one Green – Diam. Ø 0,85 (±0,10) mm. The two free conductors are isolated with PVC, colored one black and one red. Diam. Ø 1,05 (±0,10) mm.



MILAN S.r.l. a socio unico

**Head Office – Export department:**  
 Viale Europa, 74  
 20090 Cusago (MI) Italy  
 T. +39 02 9039.4556-4158  
 F. +39 02 9039.4551  
 www.taskercables.com

**Ufficio Commerciale e Centro Distribuzione**  
 Viale Europa 72 Strada F12  
 20090 Cusago (MI) Italy  
 T. +39 02 9039.0037-0059  
 F. +39 02 9039.0049  
 www.tasker.it

**G:** Twisted pair stranded formation in O.F.C. Silver Plated Copper, 7x0,13 mm.  
 Nom. Cross section 1x2x0,08 mm<sup>2</sup>.  
 Free conductors Stranded Formation in O.F.C. tinned copper 7x0,16 mm.  
 Nom. Cross section 2x0,14 mm<sup>2</sup>.

**MARKING**

**tasker®** TSK1162 28 AWG – UL – AWM Style 2725 Silver Plated O.F.C. High Speed  
 U.S.B. 3.0 80°C – 30V FirestoP® VW-1

**CUSTOM**

This product is also available in **L.S.Z.H., PE, PUR**, with or without **Steel Armor**.

**Cable Properties**

<b>Standard</b>	USB 3.0
<b>UL Style</b>	2725
<b>Max Rated Voltage</b>	30 V
<b>Operative Temperature</b>	-20/+70°C

<b>USE</b>	<b>X</b>	Indoor	Interno Edificio	<b>INSTALLATION</b>	<b>X</b>	Fixed	Fissa	<b>INFORMATION</b>	<b>X</b>	RoHS2 Compliant
<b>Impiego</b>	<b>X</b>	Outdoor Limited	Esterno Limitato	<b>Posa</b>	<b>X</b>	Flexible Limited	Flessibilità limitata	<b>Informazioni</b>	<b>X</b>	Ver.B / 17.06.16
		Outdoor Direct Burial	Esterno Interrato		<b>X</b>	Dynamic (Drag Chain)	Mobile in Catena			
		.....	.....			Dynamic (Torsion)	Mobile in Torsione			.....