

MILAN S.r.l. a socio unico

**Head Office – Export department:**  
 Viale Europa, 74  
 20090 Cusago (MI) Italy  
 T. +39 02 9039.4556-4158  
 F. +39 02 9039.4551  
 www.taskercables.com

**Ufficio Commerciale e Centro Distribuzione**  
 Viale Europa 72 Strada F12  
 20090 Cusago (MI) Italy  
 T. +39 02 9039.0037-0059  
 F. +39 02 9039.0049  
 www.tasker.it


## Technical Datasheet



**Halogen Free**

**Firestop®**

# tasker® TSK 1078 L.S.Z.H. – 1x0,26 mm<sup>2</sup> HDTV – HD SDI - Coaxial Cable 75 Ω

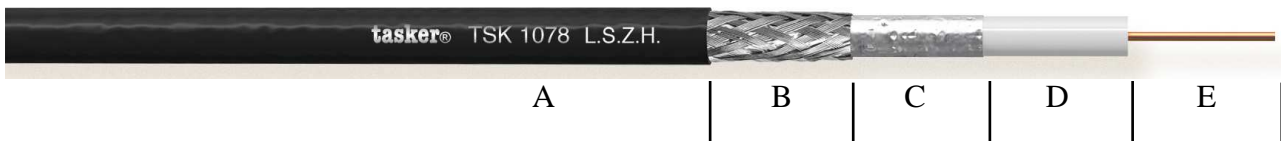

**CATEGORY** Coaxial cable 75 Ω (See Video Catalogue)

- A:** Black Soft **L.S.Z.H.** sheath. - Outer Diam. Ø 5,90 (±0,20) mm.
- B:** First Shielding O.F.C. tinned copper Braid covering 95%.
- C:** Second Shielding in Aluminum foil tape, covering 100 %.
- D:** Core Insulation with Foam PE – Nom. Ø 3,70 (±0,20) mm.
- E:** Stiff Wire in O.F.C. Red Copper - formation 1x0,813 mm.  
 Nom. Cross section 1x0,52 mm<sup>2</sup>.

**MARKING**

**tasker®** TSK1078 75Ω - 20 AWG O.F.C. – GAS INJECTED FHDPE – LSZH –  
 BROADCAST COAX VIDEO HDTV / SDI CABLE

**CUSTOM**

This product is also available in **PVC, PE, PUR**, with or without **Steel Armor**.

### Cable Properties

<b>Conductor Resistance</b>	33 Ω/Km ± 5%
<b>Capacity Core/Shield</b>	53,5 pF/mt
<b>Velocity of Propagation</b>	83%
<b>Impedance</b>	75 Ω
<b>Nom. Delay</b>	4,0 ns/m.
<b>Operative Temperature</b>	-30/+70°C

<b>USE</b>	<input checked="" type="checkbox"/>	Indoor	Interno Edificio	<b>INSTALLATION</b>	<input checked="" type="checkbox"/>	Fixed	Fissa	<b>INFORMATION</b>	<input checked="" type="checkbox"/>	RoHS2 Compliant
<b>Impiego</b>	<input checked="" type="checkbox"/>	Outdoor Limited	Esterno Limitato	<b>Posa</b>	<input checked="" type="checkbox"/>	Flexible Limited	Flessibilità limitata	<b>Informazioni</b>	<input checked="" type="checkbox"/>	Ver. C / 27.06.16
		Outdoor Direct Burial	Esterno Interrato		<input checked="" type="checkbox"/>	Dynamic (Drag Chain)	Mobile in Catena			
						Dynamic (Torsion)	Mobile in Torsione			