


SCHEMATIC	
MODEL NO	C



NO.	Description	Material	Q'TY	Finish
6.	Cover	PBT+30% Fibre Glass	1	Black Color
5.	Housing	PBT+30% Fibre Glass	1	Black Color
4.	Pin(2.5φ)	Copper	1	Nickel Plated
3.	Break Terminal	0.4T Brass	1	Silver Plated
2.	Sleeve Spring	0.2T Phosphor Bronze	1	Silver Plated
1.	Pin Terminal	0.4T Brass	1	Silver Plated

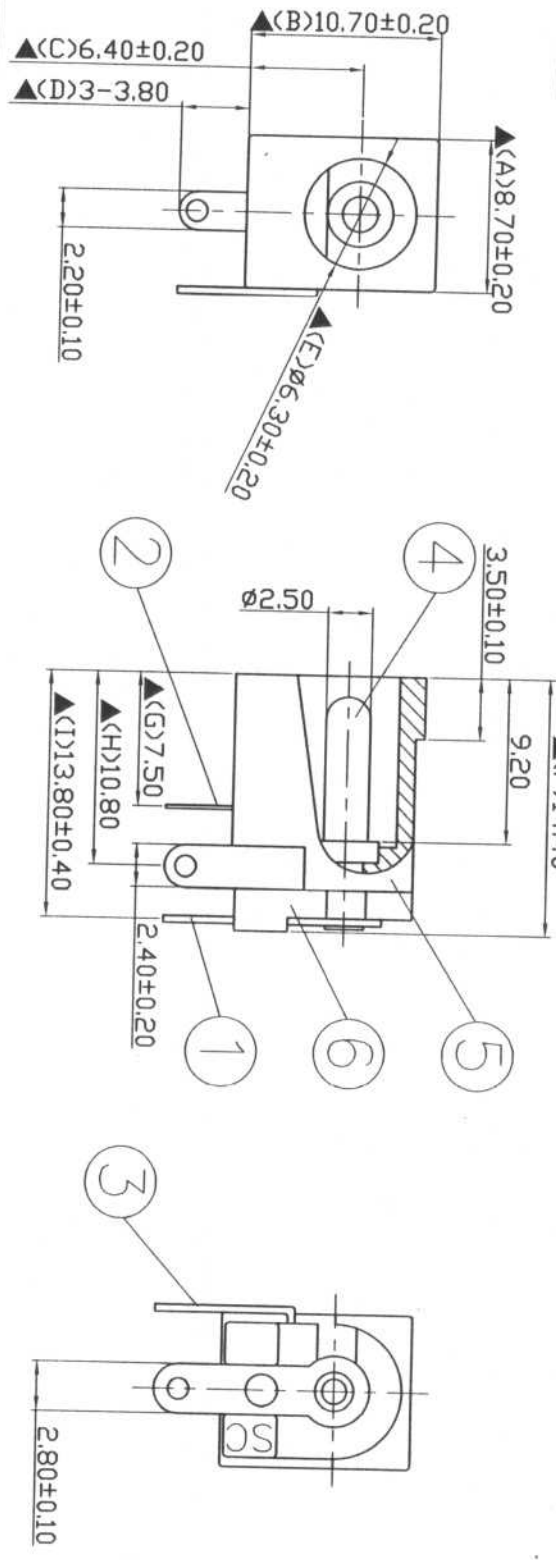

DATE	DWN	CHKD	APVD	MANAGER
04.27.2003	陳梅			

S.C. PRECISION INDUSTRIAL CO., LTD.

PART NAME : DC POWER JACK PART NUMBER: SCD438DCS011B00

TOLERANCE : ±0.3mm UNLESS OTHERWISE SPECIFIED

VERSION: 3.0

SPECIFICATIONS:
 Contact Resistance : 30mΩ max
 Insulation Resistance : 100MΩ min. at DC 500V
 Dielectric Withstand Voltage : AC 500V for one minute
 Remark: ▲ : The Most Important Dimension

Pin Hole Layout
(Jack Bottom View)

