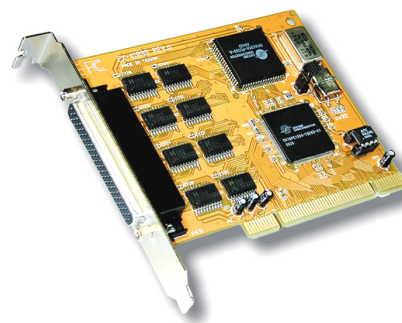
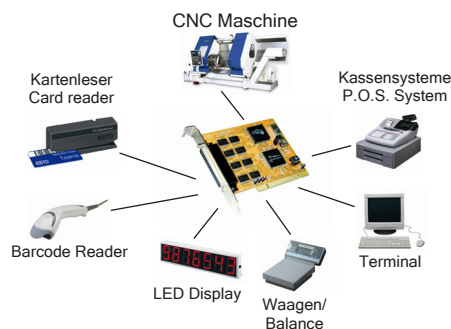


Anwendung/Application :

3.3V - 5.0V
Universal PCI

Operating System (OS):

Geprüft/Approved:

Verpackung/Packing:



8S Seriell 16C950 RS-232 Karte 32-Bit, PCI

Beschreibung :	<ul style="list-style-type: none"> Die EX-41098 stellt acht Serielle RS-232 High Performance UART 16C950 Ausgänge zur Verfügung. Er ist entwickelt worden um acht weiteren Seriellen Ausgänge für PC, kleine Workstation oder Server über den PCI- oder PCI-X Bus zu erweitern.
Merkmale :	<ul style="list-style-type: none"> Schnittstelle: RS-232 V.24 FIFO Buffer: 16C950 mit 128Byte I/O Adressen: wird vom Betriebs System vergeben Interrupt: wird vom System BIOS vergeben mit Interrupt Sharing Daten Bits: 5, 6, 7, 8 Stop Bits: 1, 1.5, 2 Parity: none, even, odd, space, mark Signale: TxD, RxD, RTS, CTS, DTR, DSR, DCD, GND Unterstützt Motherboard mit 5V und 3.3V Windows WHQL zertifiziert
Chip-Set :	<ul style="list-style-type: none"> Oxford OX16PCI954
Datentransfer-Rate :	<ul style="list-style-type: none"> 50 Baud bis 921.6KBaud
Anschlüsse :	<ul style="list-style-type: none"> 8 x 9 Pin D-SUB Seriell Stecker mit Octopus Kabel (Optional kann mit 8 x 25 Pin D-SUB Seriell Stecker bestellt werden)
Hardwaresysteme :	<ul style="list-style-type: none"> PCI 32-Bit und PCI-X 64-Bit Bus
Betriebstemperatur : Luftfeuchtigkeit :	<ul style="list-style-type: none"> 0 bis 55°C (32 bis 131°F) 5 bis 95%
Abmessung / Gewicht :	<ul style="list-style-type: none"> 120 x 76 mm / 550g
Lieferumfang :	<ul style="list-style-type: none"> EX-41098, 1 x Octopus Kabel mit 8 x 9 Pin D-SUB Stecker, Treiber CD, Handbuch



8S Serial 16C950 RS-232 PCI card, 32-Bit

Description :	<ul style="list-style-type: none"> The EX-41098 provides four high performance 16C950-type UART compatible RS-232 serial port. It is designed for PC, thin client or server to provide instant COM port expansion via the PCI- or PCI-X Bus. The card is fully PCI Plug-and-Play compatible and no IRQ and I/O address conflict problems.
Feature :	<ul style="list-style-type: none"> Interface: RS-232 V.24 FIFO Buffer: 16C950 with 128Byte I/O addresses: Setting from the operating system Interrupt: Setting from the System BIOS with Interrupt Sharing Data Bits: 5, 6, 7, 8 Stop Bits: 1, 1.5, 2 Parity: None, even, odd, space, mark Signal: TxD, RxD, RTS, CTS, DTR, DSR, DCD, GND Support Motherboard with 5V and 3.3V Windows WHQL certification
Chip-Set :	<ul style="list-style-type: none"> Oxford OX16PCI954
Data transfer rate :	<ul style="list-style-type: none"> 50 Baud to 921.6KBaud
Connectors :	<ul style="list-style-type: none"> 8 x 9 pin D-SUB serial connector with Octopus cable (can be order optional with 8 x 25 pin D-SUB serial connector)
Hardware system :	<ul style="list-style-type: none"> PCI 32-Bit and PCI-X 64-Bit Bus
Operating Temperature : Humidity :	<ul style="list-style-type: none"> 0 to 55°C (32 to 131°F) 5 to 95%
Size / Weight :	<ul style="list-style-type: none"> 120 x 76 mm / 550g
Packaging contents :	<ul style="list-style-type: none"> EX-41098, 1 x Octopus cable with 8 x 9 pin D-SUB male connector, Driver CD, Manual