


## Shape

### KDMG40008



Model Number	KDMG40008
Rated Input (W)	0.3
Maximum Input (W)	0.5
Impedance ( $\Omega$ )	$8 \pm 15\% @ 1\text{KHz} 1.0\text{V}$
Rated Frequency (Hz)	$600 \pm 20\% @ 1.0\text{V}$
Sound Pressure Level (dB)	$92 \pm 3\text{dB} (0.3\text{W}/10\text{cm}), 78 \pm 3\text{dB} (1\text{W}/1\text{m}) @ 1.0\text{K}, 1.2\text{K}, 1.5\text{K}, 2.0\text{KHz}$
Frequency Range (Hz)	Fo---7K
Magnet (mm)	$\varnothing 8.0 \times 1.0 \text{ Nd-Fe-B}$
Operating Temperature ( $^{\circ}\text{C}$ )	-20 ~ +55
Weight (Gram)	2.5
Material	Metal

## Dimension

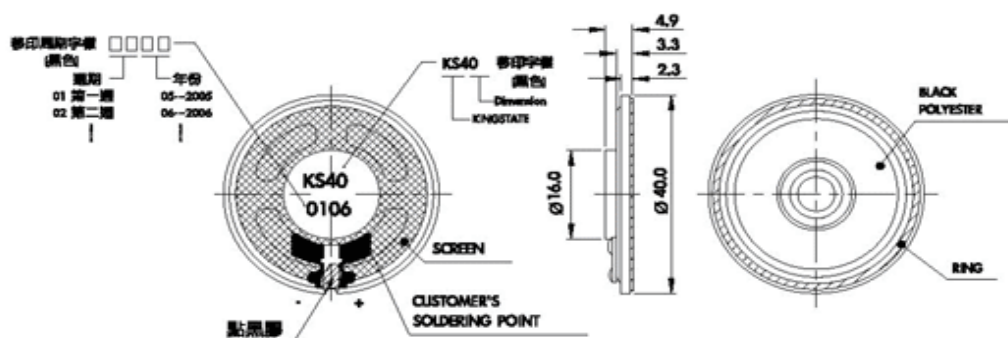

Tol :  $\pm 0.5$  Unit : mm

## Characteristic

