

Ø 4 mm-Einbaubuchsen **Ø 4 mm Panel-mount Sockets**

XEB...


Isolierte, starre Ø 4 mm-Buchsen, geeignet zur Aufnahme federnder Ø 4 mm-Stecker mit starrer Isolierhülse. Messingstanzteile. Die Buchsen bestehen aus zwei gegeneinander isolierten Halbschalen, die durch das Einstecken eines Steckers überbrückt werden (Schalterfunktion). Montage durch Festschrauben in Bohrungen von Platten oder Gehäusen aus Kunststoff, Metall etc.

Anschluss: 2x Flachstecker 4,8 mm x 0,8 mm.

XEB...

Insulated Ø 4 mm rigid sockets accepting spring-loaded Ø 4 mm plugs with rigid insulating sleeve. Brass sheet. The sockets consist of two insulated, semi-circular contacts, which are connected to each other when a plug is inserted (switch function). The socket is screwed into predrilled panels of plastic, metal etc.

2 x Flat connecting tab 4.8 mm x 0.8 mm.

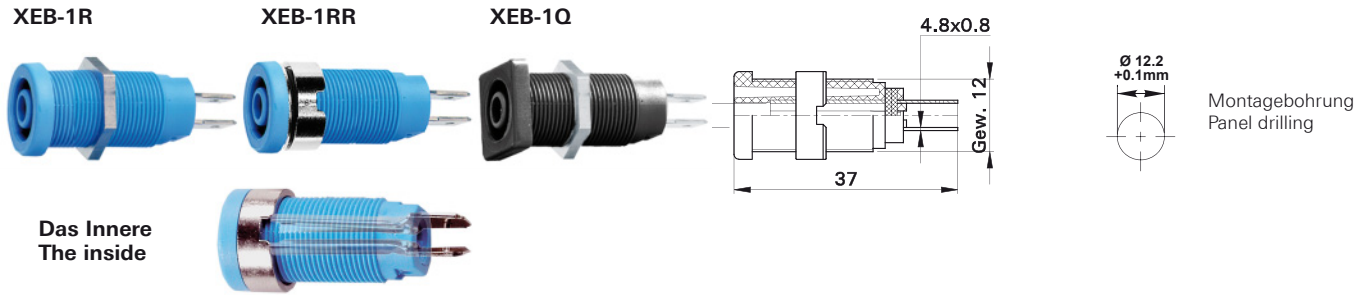

Typ Type	Bestell-Nr. Order No.	Bemessungsspannung/-strom Rated voltage/current	Mutter Nut	Montageanleitung Assembly instructions		*Farben *Colours
XEB-1R	66.9131-*	1000 V, CAT IV / 20 A	Sechskantmutter Hexagonal nut	MAH 506	Ni	
XEB-1RR	66.9850-*	1000 V, CAT IV / 20 A	Rundmutter Round nut	MAH 509	Ni	
XEB-1Q	66.9141-*	1000 V, CAT IV / 20 A	Sechskantmutter Hexagonal nut	MAH 506	Ni	

Rohrschlüssel **SS2, SS425**, Seite 22
Flachsteckhülse **FSH4,8x0,8**, Seite 21

Tube spanners **SS2, SS425**, page 22
Flat connecting receptacle **FSH4,8x0,8**, page 21

Montageanleitungen **MAH506, MAH509**
www.multi-contact.com

Assembly instructions **MAH506, MAH509**
www.multi-contact.com


XES-1R

Isolierte, starre Ø 4 mm-Buchsen, geeignet zur Aufnahme federnder Ø 4 mm-Stecker mit starrer Isolierhülse. Messingdrehteil. Montage durch Festschrauben in Bohrungen von Platten oder Gehäusen aus Kunststoff, Metall etc. **Anschluss: Lötstift Ø 2,0 mm.**

XES-1R

Insulated Ø 4 mm rigid sockets accepting spring-loaded Ø 4 mm plugs with rigid insulating sleeve. Machined brass. The sockets are screwed into predrilled panels of plastic, metal etc.

Connection: Solder pin Ø 2.0 mm.

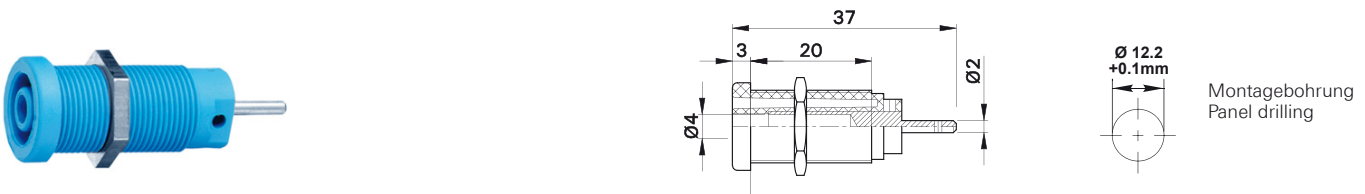

Typ Type	Bestell-Nr. Order No.	Bemessungsspannung/-strom Rated voltage/current	Mutter Nut		*Farben *Colours
XES-1R	66.9661-*	1000 V, CAT IV / 24 A	Sechskantmutter Hexagonal nut	Ni	

Montageanleitung **MAH506**
www.multi-contact.com

Assembly instructions **MAH506**
www.multi-contact.com