ERLIGH

# **Technical Data Sheet**

# 0402 Package Chip LED (0.2mm Height)

#### **Features**

- Package in 8mm tape on 7<sup>"</sup> diameter reel.
- Compatible with automatic placement equipment.
- Compatible with infrared and vapor phase reflow solder process.
- Mono-color type.
- Pb-free.
- The product itself will remain within RoHS compliant version.
- The maximum height is 0.25mm

#### **Descriptions**

- The 16-219A SMD LED is much smaller than lead frame type components, thus enable smaller board size, higher packing density, reduced storage space and finally smaller equipment to be obtained.
- Besides, lightweight makes them ideal for miniature applications. etc

#### **Applications**

- Telecommunication: indicator and backlighting in telephone and fax.
- Flat backlight for LCD, switch and symbol.
- General


#### **Device Selection Guide**

		Chip		
Part No.	Material	Emitted Color	Resin Color	
16-219A/T2D-AR2T1QY/3T	InGaN	Pure White	Yellow Diffused	



http://www.everlight.com Rev.3 Page: 1 of 12 Prepared date:26-Oct-2010 Prepared by: Jacky Wu Release Date:2010-10-28 11:24:32.0






<u>16-219A/T2D-AR2T1QY/3T</u>



# 16-219A/T2D-AR2T1QY/3T

#### **Package Outline Dimensions**

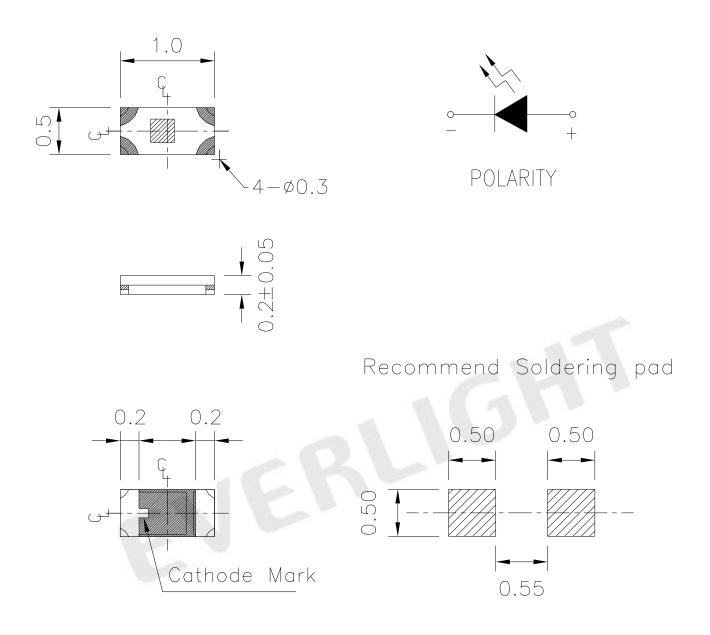

Note: The tolerances unless mentioned is  $\pm 0.1$ mm, Unit = mm

Everlight Electronics Co., Ltd. Device No. : DSE-0001281 Revision : 3 LifecyclePhase:正式發行 http://www.everlight.com Rev.3 Page: 2 of 12 Prepared date:26-Oct-2010 Prepared by: Jacky Wu Release Date:2010-10-28 11:24:32.0



# <u>16-219A/T2D-AR2T1QY/3T</u>

#### Absolute Maximum Ratings (Ta=25)

Parameter	Symbol	Rating	Unit
Reverse Voltage	VR	5	V
Forward Current	IF	10	mA
Peak Forward Current (Duty 1/10 @1KHz)	Ifp	20	mA
Power Dissipation	Pd	30	mW
Electrostatic Discharge(HBM)	ESD	150	V
Operating Temperature	Topr	-40 ~ +85	-
Storage Temperature	Tstg	-40 ~ +90	
Soldering Temperature	Tsol	Reflow Soldering : 260 Hand Soldering : 350	for 10 sec. for 3 sec.

### Electro-Optical Characteristics (Ta=25)

Parameter	Symbol	Min.	Тур.	Max.	Unit	Condition
Luminous Intensity	Iv	140		360	mcd	
Viewing Angle	2 1/2		130		deg	IF=5mA
Forward Voltage	VF	2.7		3.2	V	
Reverse Current	Ir			50	μA	V <sub>R</sub> =5V

#### Note :

# 1.Tolerance of Luminous Intensity ±11%2.Tolerance of Forward Voltage ±0.05V

Everlight Electronics Co., Ltd. Device No. : DSE-0001281 Revision : 3 LifecyclePhase:正式發行 http://www.everlight.com Rev.3 Page: 3 of 12 Prepared date:26-Oct-2010 Prepared by: Jacky Wu Release Date:2010-10-28 11:24:32.0



## <u>16-219A/T2D-AR2T1QY/3T</u>

#### **Bin Range Of Luminous Intensity**

Bin	Min	Max	Unit	Condition	
R2	140	180			
S1	180	225		T 5 A	
S2	225	285	mcd	IF=5mA	
T1	285	360			

### **Bin Range Of Forward Voltage**

Group	Bin	Min	Max	Unit	Condition
	29	2.70	2.80		
	30	2.80	2.90		
Q	31	2.90	3.00	V	IF=5mA
	32	3.00	3.10		
	33	3.10	3.20		17

1.Tolerance of Luminous Intensity ±11%

2.Tolerance of Forward Voltage ±0.05V



## <u>16-219A/T2D-AR2T1QY/3T</u>

### **Chromaticity Coordinates Specifications for Bin Grading**

Group	Bin Code	CIE_x	CIE_y	Condition
		0.274	0.226	
	1	0.274	0.258	
	1	0.294	0.286	
		0.294	0.254	
		0.274	0.258	
	2	0.274	0.291	
	2	0.294	0.319	
		0.294	0.286	
		0.294	0.254	
	2	0.294	0.286	
	3	0.314	0.315	
٨		0.314	0.282	T
А		0.294	0.286	IF=5mA
	4	0.294	0.319	
		0.314	0.347	
		0.314	0.315	
		0.314	0.282	
	5	0.314	0.315	
	5	0.334	0.343	
		0.334	0.311	
		0.314	0.315	]
		0.314	0.347	]
	6	0.334	0.376	
		0.334	0.343	

#### Notes:

1.The C.I.E. 1931 chromaticity diagram ( Tolerance ±0.01).


2. The products are sensitive to static electricity and care must be fully taken when handling products.

Everlight Electronics Co., Ltd.http://www.everlight.comRev.3Page: 5 of 12Device No. : DSE-0001281Prepared date:26-Oct-2010Prepared by: Jacky WuRevision: 3Release Date:2010-10-28 11:24:32.0LifecyclePhase:正式發行Expired Period: Forever



# <u>16-219A/T2D-AR2T1QY/3T</u>

### **CIE Chromaticity Diagram**

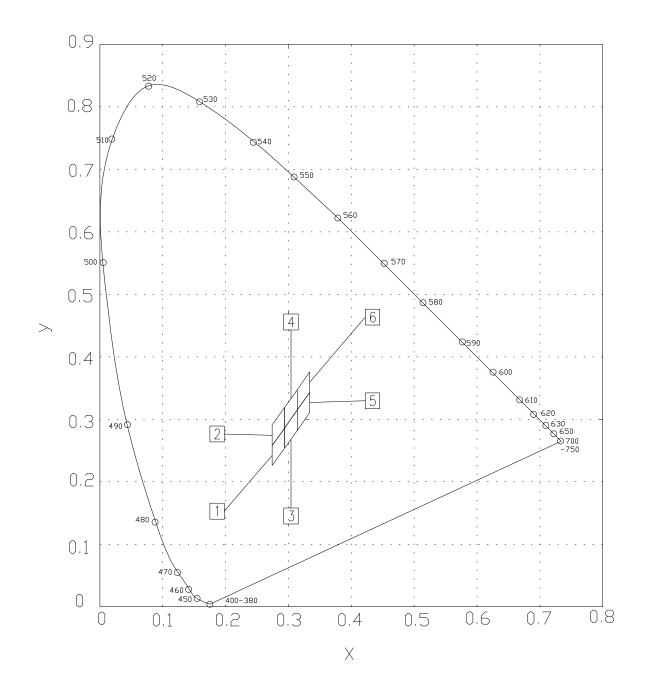


Everlight Electronics Co., Ltd. Device No. : DSE-0001281 Revision : 3 LifecyclePhase:正式發行 http://www.everlight.com Rev.3 Page: 6 of 12 Prepared date:26-Oct-2010 Prepared by: Jacky Wu Release Date:2010-10-28 11:24:32.0



# 16-219A/T2D-AR2T1QY/3T

### **Typical Electro-Optical Characteristics Curves**

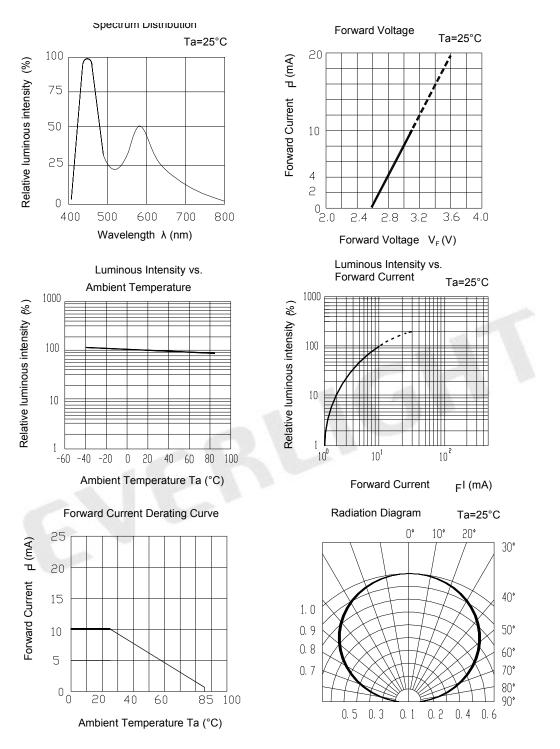

Everlight Electronics Co., Ltd. Device No. : DSE-0001281 Revision : 3 LifecyclePhase:正式發行 http://www.everlight.com Rev.3 Page: 7 of 12 Prepared date:26-Oct-2010 Prepared by: Jacky Wu Release Date:2010-10-28 11:24:32.0




## <u>16-219A/T2D-AR2T1QY/3T</u>

#### **Label Explanation**

- **CAT: Luminous Intensity Rank**
- **HUE: Chromaticity Coordinates**
- **REF: Forward Voltage Rank**



### **Reel Dimensions**

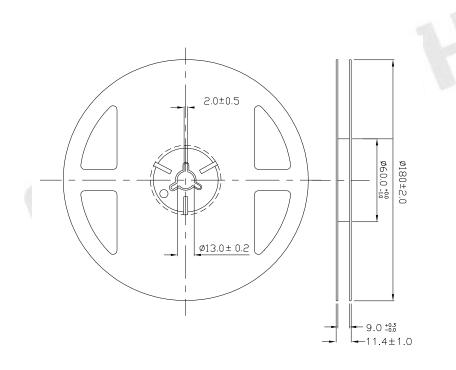


Note: The tolerances unless mentioned is  $\pm 0.1$ mm, Unit = mm

Everlight Electronics Co., Ltd. Device No. : DSE-0001281 Revision : 3 LifecyclePhase:正式發行 http://www.everlight.com Rev.3 Page: 8 of 12 Prepared date:26-Oct-2010 Prepared by: Jacky Wu Release Date:2010-10-28 11:24:32.0




## <u>16-219A/T2D-AR2T1QY/3T</u>

### **Carrier Tape Dimensions: Loaded quantity 3000 PCS per reel**

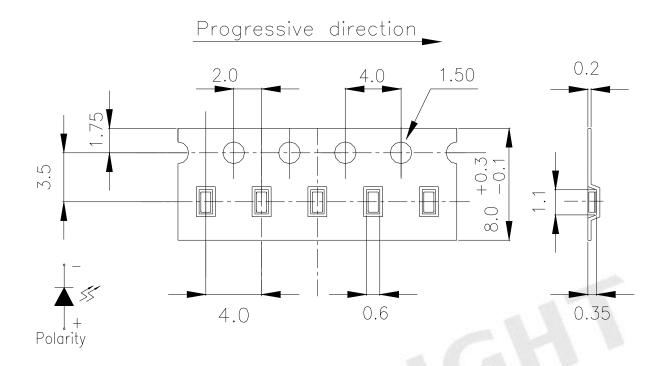

Note: The tolerances unless mentioned is  $\pm 0.1$  mm, Unit = mm

### **Moisture Resistant Packaging**

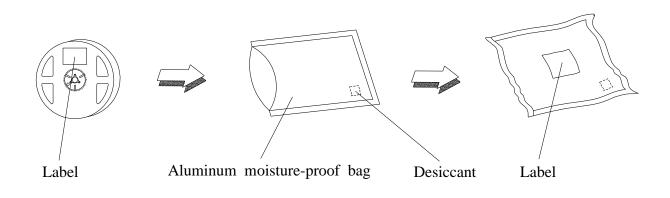

Everlight Electronics Co., Ltd. Device No. : DSE-0001281 Revision : 3 LifecyclePhase:正式發行 http://www.everlight.com Rev.3 Page: 9 of 12 Prepared date:26-Oct-2010 Prepared by: Jacky Wu Release Date:2010-10-28 11:24:32.0



# <u>16-219A/T2D-AR2T1QY/3T</u>

#### **Reliability Test Items And Conditions**

The reliability of products shall be satisfied with items listed below. Confidence level : 90%

LTPD: 10%

No.	Items	Test Condition	Test Hours/Cycles	Sample Size	Ac/Re
1	Reflow Soldering	Temp. : 260 ±5 Min. 10sec.	6 Min.	22 PCS.	0/1
2	Temperature Cycle	H : +100 15min 5 min L : -40 15min	300 Cycles	22 PCS.	0/1
3	Thermal Shock	H : +100 5min 10 sec L : -10 5min	300 Cycles	22 PCS.	0/1
4	High Temperature Storage	Temp. : 100	1000 Hrs.	22 PCS.	0/1
5	Low Temperature Storage	Temp. : -40	1000 Hrs.	22 PCS.	0/1
6	DC Operating Life	IF = 20  mA	1000 Hrs.	22 PCS.	0/1
7	High Temperature / High Humidity	85 / 85%RH	1000 Hrs.	22 PCS.	0/1



# 16-219A/T2D-AR2T1QY/3T

### **Precautions For Use**


1. Over-current-proof

Customer must apply resistors for protection, otherwise slight voltage shift will cause big current change ( Burn out will happen ).

- 2. Storage
- 2.1 Do not open moisture proof bag before the products are ready to use.
- 2.2 Before opening the package: The LEDs should be kept at 30 or less and 90% RH or less.
- 2.3 After opening the package: The LED's floor life is 1 year under 30 or less and 60% RH or less.If unused LEDs remain, it should be stored in moisture proof packages.
- 2.4 If the moisture absorbent material (silica gel) has faded away or the LEDs have exceeded the storage time, baking treatment should be performed using the following conditions.

Baking treatment : 60±5 for 24 hours.

- 3. Soldering Condition
  - 3.1 Pb-free solder temperature profile

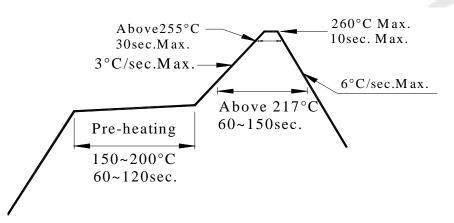

- 3.2 Reflow soldering should not be done more than two times.
- 3.3 When soldering, do not put stress on the LEDs during heating.
- 3.4 After soldering, do not warp the circuit board.




# 16-219A/T2D-AR2T1QY/3T

#### 4.Soldering Iron

Each terminal is to go to the tip of soldering iron temperature less than 350 for 3 seconds within once in less than the soldering iron capacity 25W. Leave two seconds and more intervals, and do soldering of each terminal. Be careful because the damage of the product is often started at the time of the hand solder.

#### 5.Repairing

Repair should not be done after the LEDs have been soldered. When repairing is unavoidable, a double-head soldering iron should be used (as below figure). It should be confirmed beforehand whether the characteristics of the LEDs will or will not be damaged by repairing.

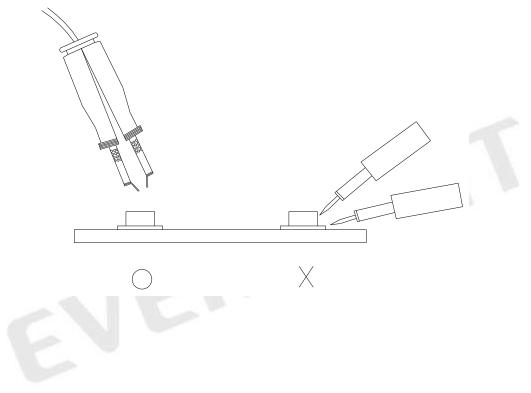

#### EVERLIGHT ELECTRONICS CO., LTD. Office: No 25, Lane 76, Sec 3, Chung Yang Rd, Tucheng, Taipei 236, Taiwan, R.O.C

*Tel:* 886-2-2267-2000, 2267-9936 *Fax:* 886-2267-6244, 2267-6189, 2267-6306 *http://www.everlight.com* 

Everlight Electronics Co., Ltd. Device No. : DSE-0001281 Revision : 3 LifecyclePhase:正式發行 http://www.everlight.com Rev.3 Page: 12 of 12 Prepared date:26-Oct-2010 Prepared by: Jacky Wu Release Date:2010-10-28 11:24:32.0