



## IDE Device to Serial ATA Converter TU-IDES(V1.0R)

The IDE to SATA Converter (TU-IDES) allows you to connect IDE devices such as CD, DVD and hard disk drives to a Serial ATA port on your computer's motherboard.

Without software installation required, simply connect power and data cables to IDE devices to SATA connector on your computer.

### FEATURES

- Connect any IDE CD, DVD or hard drive device to an available Serial ATA port
- Use your current IDE device on new SATA motherboards
- Utilizes Serial ATA 1.0 and hot-pluggable technology
- Master/slave hard drive emulation supported
- Supports PIO mode 0~4 and Ultra DMA mode 0~7
- Supports ATAPI Packet command set, and 48-bit LBA addressing
- Supports additional ATA commands for serial ATA SCR access
- Power save mode built-in
- Serial ATA Built In Self Test (BIST) ready
- 2-Year Warranty

# IDE Device to Serial ATA Converter


TU-IDES(V1.0R)

## SPECIFICATIONS

Hardware	
Standard	• ATA 33/66/100/133, SATA 1.0
Supported OS	• Any OS that supports ATA and SATA
Input	• 7-pin female SATA data connector • 4-pin power connector
Output	• 40-pin IDE female connector to IDE device
Cables	• 1x SATA cable • 1 x Y power cable
Power Consumption	• 78 mA
Dimensions	• 57 x 35 x 12mm (2.3 x 1.4 x 0.4 in.)
Weight	• Main: 15g (0.6oz.) • With wires: 40g (1.4oz.)
Temperature	• -20°C to 60°C (-4°F to 140°F)
Humidity	• 0~90%, (Non-Condensing)
Certification	• FCC, CE

## NETWORKING SOLUTIONS

### IDE to Serial ATA Converter (TU-IDES)

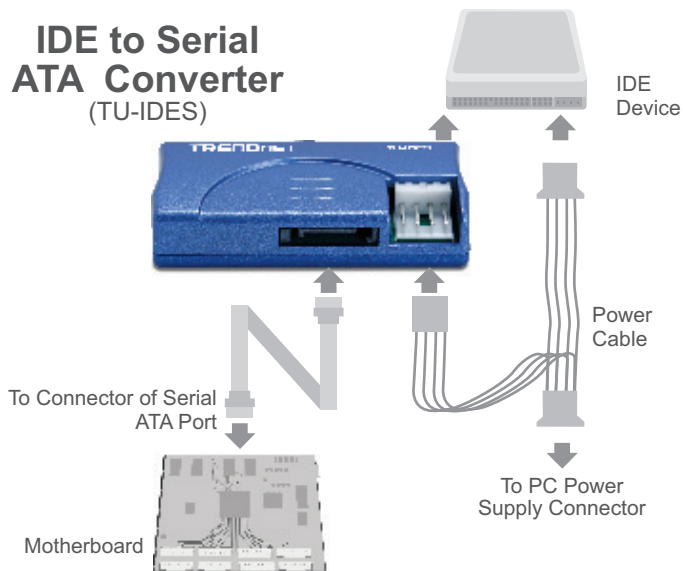

## PACKAGE CONTENTS

- TU-IDES
- 1 x 25cm (10in.) SATA cable
- 1 x 10cm (4in.) Y power cable
- Multi-Language Quick Installation Guide

## RELATED PRODUCTS

- TU2-IDSA USB to IDE/SATA Converter

## ORDERING INFORMATION

**TRENDnet**<sup>®</sup>

20675 Manhattan Place, Torrance, CA 90501 USA

Tel: 1-310-961-5500

Fax: 1-310-961-5511

Web: [www.trendnet.com](http://www.trendnet.com)

Email: [sales@trendnet.com](mailto:sales@trendnet.com)

To Order Please Call:

**1-888-326-6061**

