


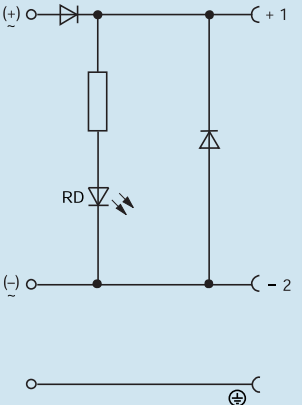
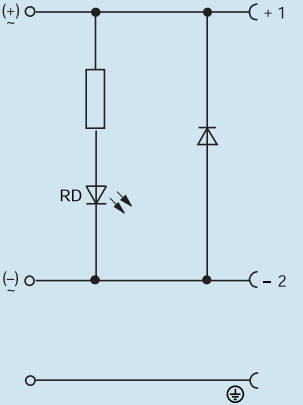
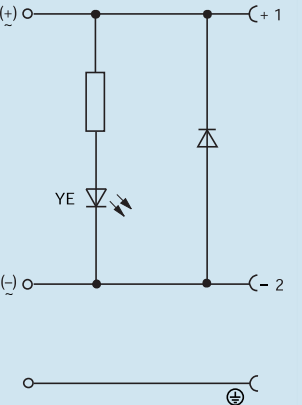


GDML 2016 LED 24 HH P black	GDML 2016 LED 24 HH black	GDML 2016 LED 24 HH YE black
<p>934 414-002</p>  <p>half-wave rectifier with protective circuit (diode) and function indicator (LED)</p>	<p>934 415-002</p>  <p>function indicator (LED) with protective circuit (diode)</p>	<p>934 416-002</p>  <p>function indicator (LED) with protective circuit (diode)</p>
<p>transparent housing, cable gland grey; Order no. 934 414-003 2 + PE M 16 (black) max. 1.5 mm² DIN EN 175 301-803-A transparent A</p>	<p>transparent housing, cable gland grey; Order no. 934 415-003 2 + PE M 16 (black) max. 1.5 mm² DIN EN 175 301-803-A transparent A</p>	<p>transparent housing, cable gland grey; Order no. 934 416-003 2 + PE M 16 (black) max. 1.5 mm² DIN EN 175 301-803-A transparent A</p>
<p>LED red half-wave rectifier diode correct polarity must be ensured</p>	<p>LED red diode correct polarity must be ensured</p>	<p>LED yellow diode correct polarity must be ensured</p>
 <p>—○— connection terminal —C— fork type spring</p>	 <p>—○— connection terminal —C— fork type spring</p>	 <p>—○— connection terminal —C— fork type spring</p>
<p>6.3 mm x 0.8 mm, 4.8 mm x 0.8 mm AC/DC 24 V 1 A ≤ 4 mOhm screw 4.5 mm to 10 mm diameter central nut</p>	<p>6.3 mm x 0.8 mm, 4.8 mm x 0.8 mm DC 24 V 8 A ≤ 4 mOhm screw 4.5 mm to 10 mm diameter central nut</p>	<p>6.3 mm x 0.8 mm, 4.8 mm x 0.8 mm DC 24 V 8 A ≤ 4 mOhm screw 4.5 mm to 10 mm diameter central nut</p>
<p>Sn PA PA</p>	<p>Sn PA PA</p>	<p>Sn PA PA</p>
<p>IP 65 (gasket necessary) 3 -40 °C to +90 °C</p>	<p>IP 65 (gasket necessary) 3 -40 °C to +90 °C</p>	<p>IP 65 (gasket necessary) 3 -40 °C to +90 °C</p>
<p>94 HB 94 HB</p>	<p>94 HB 94 HB</p>	<p>94 HB 94 HB</p>
<p>50 pieces</p>	<p>50 pieces</p>	<p>50 pieces</p>
<p>GDM 3-7, Order no. 730 801-002; GDM 3-21, Order no. 731 739-004; GDM 3-16, Order no. 731 531-002; GDM 3011-8, Order no. 732 574-001; GDM 3011 RF-1, Order no. 734 363-001</p>	<p>GDM 3-7, Order no. 730 801-002; GDM 3-21, Order no. 731 739-004; GDM 3-16, Order no. 731 531-002; GDM 3011-8, Order no. 732 574-001; GDM 3011 RF-1, Order no. 734 363-001</p>	<p>GDM 3-7, Order no. 730 801-002; GDM 3-21, Order no. 731 739-004; GDM 3-16, Order no. 731 531-002; GDM 3011-8, Order no. 732 574-001; GDM 3011 RF-1, Order no. 734 363-001</p>