


- Plug-in unit
- Fixed output voltages
- Thermal fuse in transformer
- Can upon request be modified to comply with the standard for electromedical equipment (EN 60601)
- Exchangeable DC plugs
- Plugg-inn enhet
- Faste utgangsspenninger
- Termosikring i transformator
- Kan på forespørsel modifiseres til å tilfredstille medisinsk standard (EN 60601)
- Utskiftbare DC plugger




Technical specifications

Input voltage:
Output voltage:
Max output power:
Insulation class:
Electrical safety standard:
EMC standards
• Emission:
• Immunity:
Output terminals
Cord with/without plug:
Dimensions excl. plug (LxWxH):
Weight:

Tekniske data

Inngangsspenning: 230 VAC +6/-10%, 50/60Hz
Utgangsspenning: 6-42 VAC
Maks. utgangseffekt: 20,0 VA
Isolasjonsklasse: II
Elektrisk sikkerhetsstandard: EN 60065, EN 60742, EN 60950
EMC standarder
• Emisjon: EN 61000-6-3
• Immunitet: EN 61000-6-1
Utgangsterminaler
Sek. ledning med/uten plugg: Accessories /Tilbehør
Mål uten plugg (LxBxH): 100 x 51 x 63 mm
Vekt: 450 g

VAC

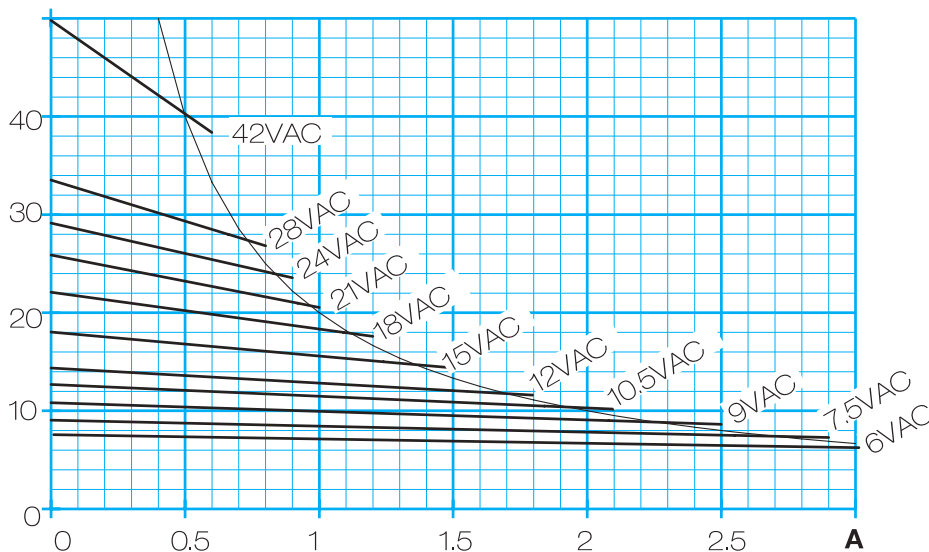

Voltage version (VAC) Spenningsversjoner (VAC)	Nominal load (mA) Merkelast (mA)
6	3200
7,5	2600
9	2100
10,5	1900
12	1600
15	1300
18	1100
21	950
24	850
28	700
42	430

Max. load (A): See diagram
Maks. last (A): Se kurve