

**MIRO BT**

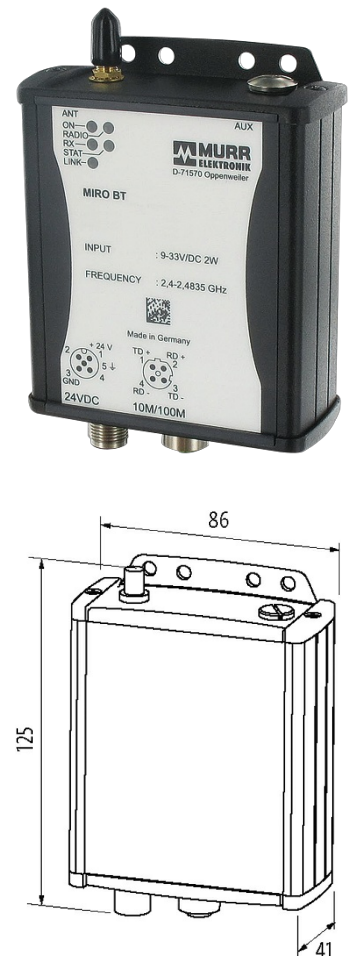
IP65 Bluetooth Master/Slave PROFINET

## PROFINET

Bluetooth Master/Slave

100 Mbit/s

Connection cables are in the online shop under "Connection Technology".

[Link to Product](#)**Illustration**

Product may differ from Image

**More Info****Connections**

Fieldbus	Ethernet 10/100 Mbit/s; M12, D-coded
Supply	M12, 5-pole, A-coded

**Technical Data**

Operating voltage	24 V DC (EN 61131-2)
Operating current	max. 150 mA

**General data**

Standards	approved in: BE, DK, DE, EE, FI, FR (restricted), GB, IE, IS, IT, CA, LV, LT, LU, MT, NL, NO (without Spitzbergen), AT, PL, PT, SE, CH, SK, SI, EL, ES, CZ, HU, US, CY
Housing	Metal black
Protection	IP65
Mounting method	screw fixing, M4
Dimensions H×W×D	125×86×41 mm
Temperature range	-20...+60 °C (storage temperature -40...+75 °C)

**Wireless technology**

Frequency	2.4 GHz Bluetooth
Transmission power	100 mW
No. of wireless slaves/devices	max. 4/max. 6
Coverage indoor	100 m
Coverage outdoor	300 m
Antenna connection	SMA (50 Ω)

**Commercial data**

country of origin	DE
customs tariff number	85176200
EAN	4048879582414
eClass	19170101
Packaging unit	1