


Resistance thermometer with connecting cable

Series 72-KFW

72-KFW is a series of resistance thermometers with a metal protection tube and cable with free ends or terminated by electrical connector according to individual arrangements (socket, plug).

The metal cover protects the measuring sensor from direct contact with the medium and enables proper positioning and installation of the probe.



Description

Type	72-11301002-1000.0050.SS
Article number	16022775

Resistance thermometer with metal protection tube and silicone insulated connecting cable. The measuring insert is made on the basis of a Pt100 resistance sensor with characteristics to EN 60751.

The cable is ended with ferrules.


Characteristic

Temperature [°C]	Resistance [Ω]	Temperature [°C]	Resistance [Ω]
-20	92,16	50	119,40
0	100,00	100	138,51
10	103,90	125	147,95
20	107,79	150	157,33
25	109,73	180	168,48

Technical specifications

Sensor	1x Pt100
Connection circuit	3-wire
Measuring range	-20...+180°C
Accuracy	IEC 60751, class A
Nominal length NL	50mm
Diameter D	6mm
Material	stainless steel
Cable length AL	10000mm
Cable insulation	silicone
Cable ambient temperature	max. +180°C
Cable termination	ferrules

Marking

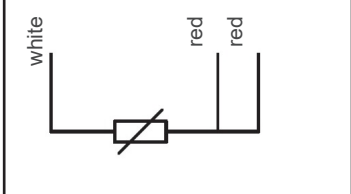Color coding of wires according to IEC 60751 white red red	
---	---

Mounting accessories, screw fittings, flanges, protection tubes are in other catalog cards and on the website.