



Connectors > Connector Backshells & Adapters > Ruggedized Backshells & Adapters



Connector General Specification Number: MIL-DTL-38999 Series III/Class C,F,K,W, MIL-DTL-38999 Series IV/Class C,F,W, MIL-DTL-38999 Series IV/Class C,W, MIL-DTL-38999 Series IV/Class F,W

Backshell Material: Aluminum

Adapter Plating Material: Electroless Nickel (AMS-C-26074)

Cable Diameter Range: 7.9 – 12.7 mm [.313 – .5 in]

Adapter Angle: Straight

Features

Product Type Features

| | |
|------------------------------|---|
| Termination Device Included | TR10AI |
| Pluggable I/O Accessory Type | Tinel-Lock Adapter |
| Adapter Angle | Straight |
| Termination Device Type | Side-Entry Tinel-Lock Ring, Tinel-Lock Adapter, Tinel-Lock Ring |
| Connector Shell Size | 23, H |

Body Features

| | |
|--------------------------|----------------------------------|
| Color | Bright |
| Backshell Material | Aluminum |
| Adapter Plating Material | Electroless Nickel (AMS-C-26074) |
| TE Adapter Code | 40 |
| Adapter Entry Size | 10 |

Termination Features

| | |
|-----------------------|-----------------|
| Overbraid Termination | Tinel-Lock Ring |
|-----------------------|-----------------|

Dimensions

| | |
|----------------------|------------------------------|
| Cable Entry Diameter | .2 – 15.9 mm [.01 – .63 in] |
| Cable Diameter Range | 7.9 – 12.7 mm [.313 – .5 in] |

Usage Conditions



| | |
|-----------------------|-------|
| Salt Spray Resistance | 48 Hr |
|-----------------------|-------|

| | |
|-----------------------------|----------------------------|
| Operating Temperature Range | -65 – 200 °C[-85 – 392 °F] |
|-----------------------------|----------------------------|

Industry Standards

| | |
|---------------------------------------|---|
| Connector Detail Specification Number | D38999/20, D38999/24, D38999/26, D38999/40, D38999/42, D38999/46, D38999/47 |
|---------------------------------------|---|

Other

| | |
|--|---|
| Connector General Specification Number | MIL-DTL-38999 Series III/Class C,F,K,W, MIL-DTL-38999 Series IV/Class C,F,W, MIL-DTL-38999 Series IV/Class C,W, MIL-DTL-38999 Series IV/Class F,W |
|--|---|

Product Compliance

[For compliance documentation, visit the product page on TE.com>](#)

| | |
|------------------------------|---------------------------|
| EU RoHS Directive 2011/65/EU | Compliant with Exemptions |
|------------------------------|---------------------------|

| | |
|-----------------------------|-----------|
| EU ELV Directive 2000/53/EC | Compliant |
|-----------------------------|-----------|

| | |
|---|--------------------------------------|
| China RoHS 2 Directive MIIT Order No 32, 2016 | Restricted Materials Above Threshold |
|---|--------------------------------------|

| | |
|--|---|
| EU REACH Regulation (EC) No. 1907/2006 | <p>Current ECHA Candidate List: JUNE 2022 (224)</p> <p>Candidate List Declared Against: JAN 2022 (223)</p> <p>SVHC > Threshold:</p> <p>Pb (.3% in Machined aluminum body)</p> <p>Article Safe Usage Statements: Do not eat, drink or smoke when using this product. Wash thoroughly after handling. Recycle if possible and dispose of the article by following all applicable governmental regulations relevant to your geographic location.</p> |
|--|---|

| | |
|-----------------|---|
| Halogen Content | Low Halogen - Br, Cl, F, I < 900 ppm per homogenous material. Also BFR/CFR/PVC Free |
|-----------------|---|

| | |
|---------------------------|--|
| Solder Process Capability | Not applicable for solder process capability |
|---------------------------|--|

Product Compliance Disclaimer

This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked. Additionally, the part numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulation, the information TE provides on SVHC in articles for this part number is based on the latest European Chemicals Agency (ECHA) 'Guidance on requirements for substances in articles' posted at this URL: <https://echa.europa.eu/guidance-documents/guidance-on-reach>

Compatible Parts



TE Part # 173643-000
RH-3960-1-TINEL-KIT-120V

Also in the Series | RAYCHEM TXR



Ruggedized Backshells & Adapters
(2071)



Screened Backshells & Adapters(1)


Customers Also Bought




TE Part #423209-000
TXR40AB00-0804AI




TE Part #792131-000
TXR40AC00-2016AI

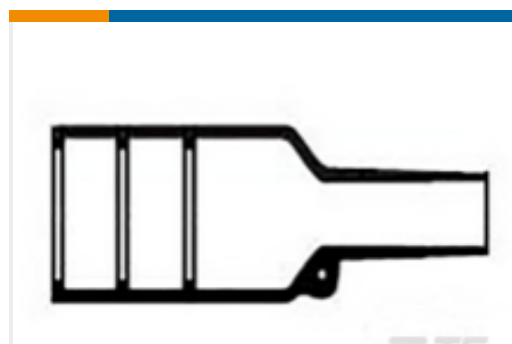


TE Part #856164-002
202K163-25-02/225-CS-1858

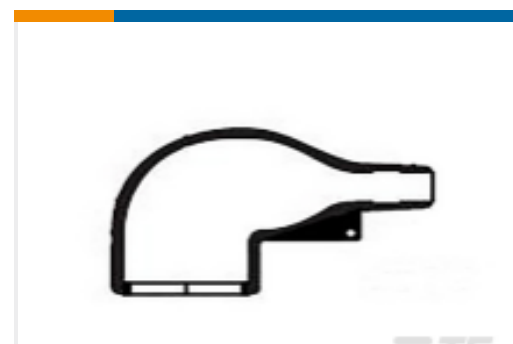

TE Part #903960-006
222K163-25/225-CS-1858-0

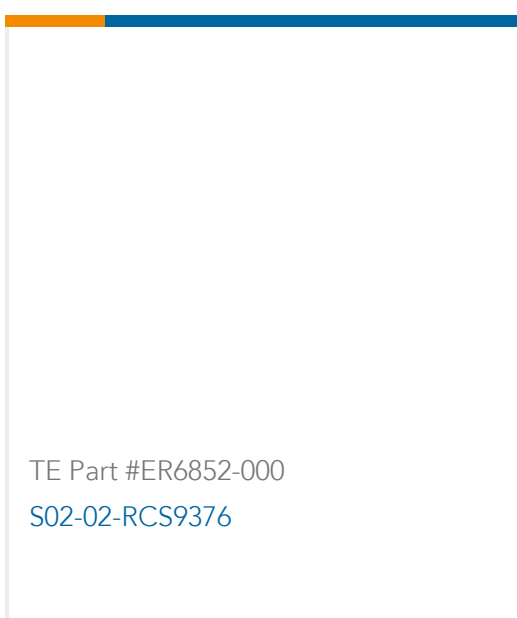

TE Part #ER6852-000
S02-02-RCS9376

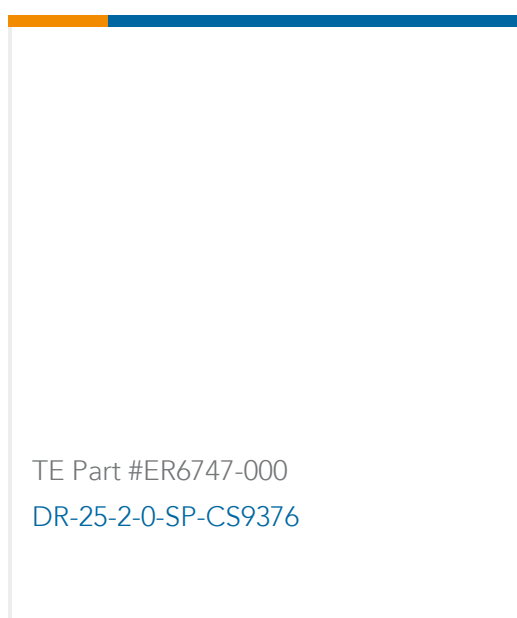

TE Part #ER6747-000
DR-25-2-0-SP-CS9376

Documents

Product Drawings

[TXR40AC00-2210AI](#)

English

CAD Files



3D PDF

3D

Customer View Model

[ENG_CVM_CVM_609991-000_O.2d_dxf.zip](#)

English

Customer View Model

[ENG_CVM_CVM_609991-000_O.3d_igs.zip](#)

English

Customer View Model

[ENG_CVM_CVM_609991-000_O.3d_stp.zip](#)

English

By downloading the CAD file I accept and agree to the [Terms and Conditions](#) of use.

Datasheets & Catalog Pages

[5-1654025-5_sec6_Adapters](#)

English

[Circular Backshells](#)

English

Product Specifications

[General Information Package for Tinel-Lock Adapters](#)

English

[Product Specification](#)

English

[Braid termination using a Tinel Lock Ring installed using a resistance heater.](#)

French

[Braid termination using a Tinel Lock Ring installed using a resistance heater.](#)

English

[PERFORMANCE SPECIFICATION Tinel-Lock Rings, Heat Recoverable for Braid Termination](#)

English

[ASSEMBLY GUIDE for Tinel -Lock Rings, Heat Recoverable for Braid Temination](#)

English

Instruction Sheets

[Instruction Sheet \(U.S.\)](#)

English