


Glass Passivated Single-Phase Bridge Rectifier

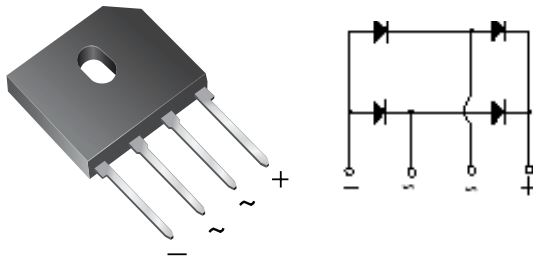

Case Style GBU

FEATURES

- UL Recognition file number E54214
- Ideal for printed circuit boards
- High surge current capability
- High case dielectric strength of 1500 V_{RMS}
- Solder Dip 260 °C, 40 seconds
- Component in accordance to RoHS 2002/95/EC and WEEE 2002/96/EC



TYPICAL APPLICATIONS

General purpose use in ac-to-dc bridge full wave rectification for Monitor, TV, Printer, Power supply, Switching Mode Power Supply, Adapter, Audio equipment and Home Appliances applications.

MECHANICAL DATA

Case: GBU

Epoxy meets UL 94V-0 flammability rating

Terminals: Matte tin plated leads, solderable per J-STD-002B and JESD22-B102D

E3 suffix for commercial grade

Polarity: As marked on body

Mounting Torque: 10 cm·kg (8.8 inches·lbs) max.

Recommended Torque: 5.7 cm·kg (5 inches·lbs)

MAJOR RATINGS AND CHARACTERISTICS

$I_{F(AV)}$	8 A
V_{RRM}	50 V to 1000 V
I_{FSM}	200 A
I_R	5 μ A
V_F	1.0 V
T_j max.	150 °C

MAXIMUM RATINGS ($T_A = 25$ °C unless otherwise noted)

PARAMETER	SYMBOL	GBU8A	GBU8B	GBU8D	GBU8G	GBU8J	GBU8K	GBU8M	UNIT
Maximum repetitive peak reverse voltage	V_{RRM}	50	100	200	400	600	800	1000	V
Maximum RMS voltage	V_{RMS}	35	70	140	280	420	560	700	V
Maximum DC blocking voltage	V_{DC}	50	100	200	400	600	800	1000	V
Maximum average forward rectified output current at $T_C = 60$ °C (1) $T_A = 25$ °C (2)	$I_{F(AV)}$	8.0 3.0							A
Peak forward surge current single sine-wave super-imposed on rated load	I_{FSM}	200							A
Rating for fusing ($t < 8.3$ ms)	I^2t	166							A ² sec
Operating junction and storage temperature range	T_J, T_{STG}	- 55 to + 150							°C

Note:

(1) Unit case mounted on Al plate heatsink

(2) Units mounted in free air, no heatsink on P.C.B., 0.5 x 0.5" (12 x 12 mm) copper pads, 0.375" (9.5 mm) lead length



ELECTRICAL CHARACTERISTICS ($T_A = 25\text{ }^\circ\text{C}$ unless otherwise noted)											
PARAMETER	TEST CONDITIONS	SYMBOL	GBU8A	GBU8B	GBU8D	GBU8G	GBU8J	GBU8K	GBU8M	UNIT	
Maximum instantaneous forward voltage drop per diode	at 8.0 A	V_F					1.0				V
Maximum DC reverse current at rated DC blocking voltage per diode	$T_A = 25\text{ }^\circ\text{C}$ $T_A = 125\text{ }^\circ\text{C}$	I_R					5.0 500				μA
Typical junction capacitance per diode	at 4 V, 1 MHz	C_J	211						94		pF

THERMAL CHARACTERISTICS ($T_A = 25\text{ }^\circ\text{C}$ unless otherwise noted)										
PARAMETER	SYMBOL	GBU8A	GBU8B	GBU8D	GBU8G	GBU8J	GBU8K	GBU8M	UNIT	
Typical thermal resistance	$R_{\theta JA}^{(2)}$ $R_{\theta JC}^{(1,3)}$					20 4.0				$^\circ\text{C/W}$

Note:

- (1) Units case mounted on Al plate heatsink
- (2) Units mounted in free air, no heatsink on P.C.B., 0.5 x 0.5" (12 x 12 mm) copper pads, 0.375" (9.5 mm) lead length
- (3) Recommended mounting position is to bolt down on heatsink with silicone thermal compound for maximum heat transfer with #6 screws

ORDERING INFORMATION				
PREFERRED P/N	UNIT WEIGHT (g)	PREFERRED PACKAGE CODE	BASE QUANTITY	DELIVERY MODE
GBU8J-E3/45	3.857	45	20	Tube
GBU8J-E3/72	3.857	72	200	Paper Box

RATINGS AND CHARACTERISTICS CURVES

($T_A = 25\text{ }^\circ\text{C}$ unless otherwise noted)

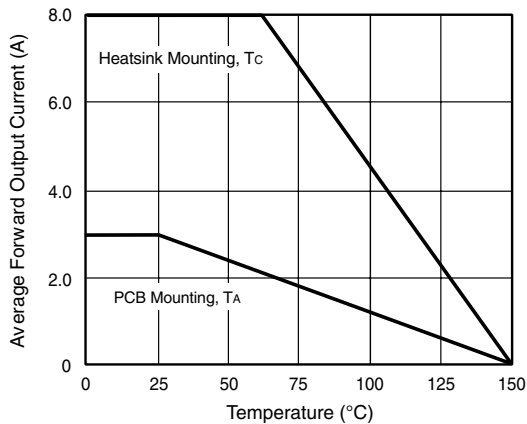


Figure 1. Derating Curve Output Rectified Current

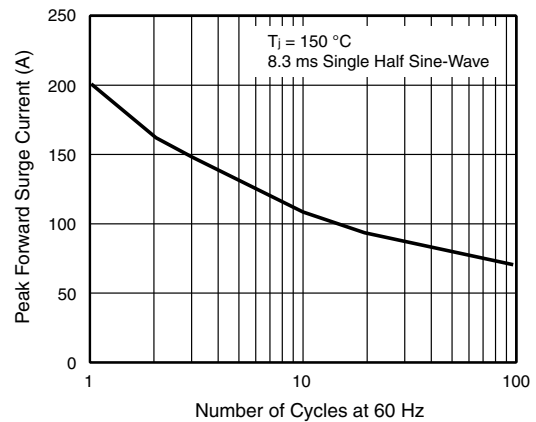


Figure 2. Maximum Non-Repetitive Peak Forward Surge Current Per Diode

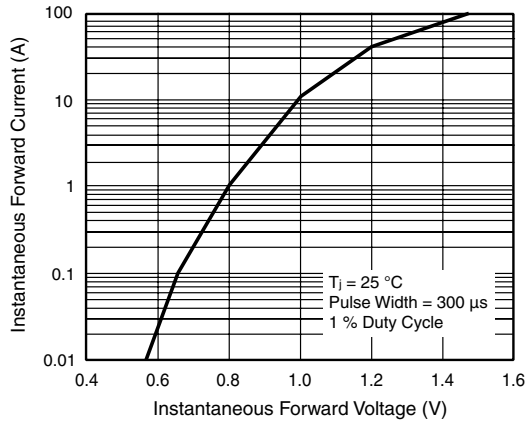


Figure 3. Typical Forward Characteristics Per Diode

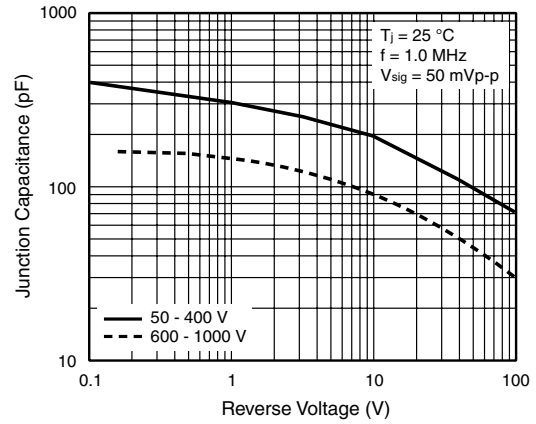


Figure 5. Typical Junction Capacitance Per Diode

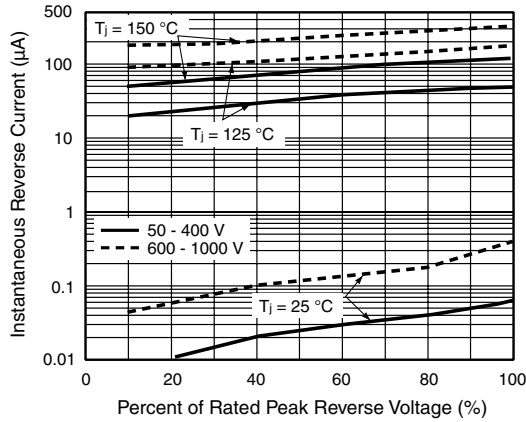


Figure 4. Typical Reverse Leakage Characteristics Per Diode


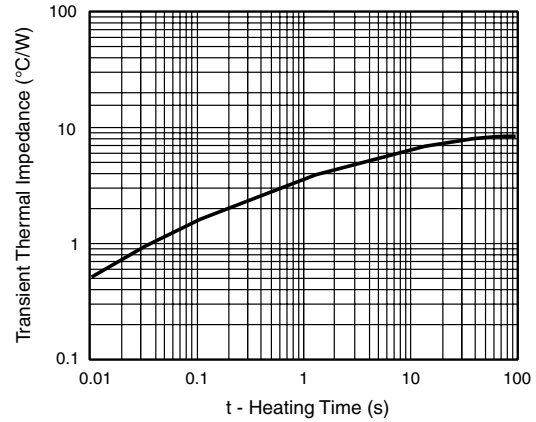


Figure 6. Typical Transient Thermal Impedance Per Diode

PACKAGE OUTLINE DIMENSIONS in inches (millimeters)

Case Type GBU

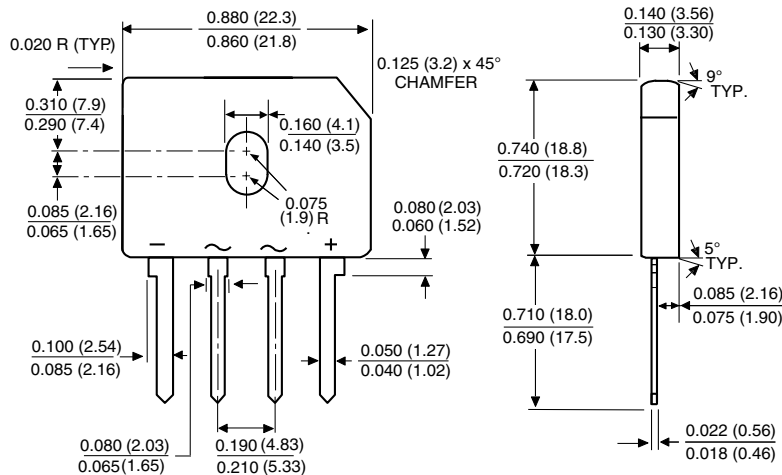

Polarity shown on front side of case, positive lead by beveled corner



Notice

Specifications of the products displayed herein are subject to change without notice. Vishay Intertechnology, Inc., or anyone on its behalf, assumes no responsibility or liability for any errors or inaccuracies.

Information contained herein is intended to provide a product description only. No license, express or implied, by estoppel or otherwise, to any intellectual property rights is granted by this document. Except as provided in Vishay's terms and conditions of sale for such products, Vishay assumes no liability whatsoever, and disclaims any express or implied warranty, relating to sale and/or use of Vishay products including liability or warranties relating to fitness for a particular purpose, merchantability, or infringement of any patent, copyright, or other intellectual property right.

The products shown herein are not designed for use in medical, life-saving, or life-sustaining applications. Customers using or selling these products for use in such applications do so at their own risk and agree to fully indemnify Vishay for any damages resulting from such improper use or sale.