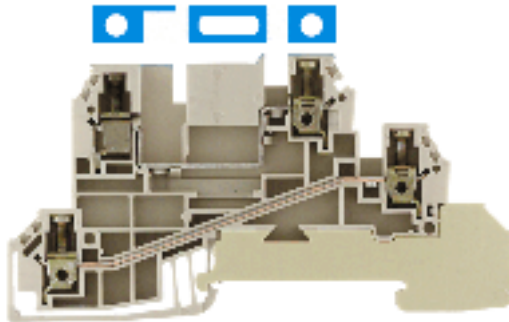


W-Series
WDL 2.5/N/L**Weidmüller Interface GmbH & Co. KG**
Klingenbergstraße 16
D-32758 Detmold
Germany
Fon: +49 5231 14-0
Fax: +49 5231 14-292083
www.weidmueller.com

The versatile and extensive range of products - from 0.05 mm² to 300 mm² - means that you have diverse options for your applications at your disposal. Hardened steel for mechanical strength and high-quality tinned copper for optimum conductivity. All materials comply with RoHS requirements and have been tested to current environment guidelines.

General ordering data

Type	WDL 2.5/N/L
Order No.	1030000000
Version	W-Series, Distributor terminal block with WQV, Rated cross-section: 2.5 mm ² , Screw connection
GTIN (EAN)	4008190172947
Qty.	50 pc(s).

Data sheet

W-Series WDL 2.5/N/L

Weidmüller Interface GmbH & Co. KG
 Klingenbergstraße 16
 D-32758 Detmold
 Germany
 Fon: +49 5231 14-0
 Fax: +49 5231 14-292083
 www.weidmueller.com

Technical data

Dimensions and weights

Width	6.1 mm	Height	90 mm
Depth	48 mm	Net weight	17.5 g

Temperatures

Continuous operating temp., min.	-50 °C	Continuous operating temp., max.	120 °C
----------------------------------	--------	----------------------------------	--------

Additional technical data

Explosion-tested version	No	Number of similar terminals	1
Open sides	right	Type of mounting	Snap-on
Version	Screw connection, L connection, for screwable cross-connection, One end without connector		

CSA ratings data

Certificate No. (CSA)	12400-296	Voltage size B (CSA)	300 V
Voltage size D (CSA)	300 V	Current size B (CSA)	10 A
Current size D (CSA)	10 A	Wire cross section max. (CSA)	12 AWG
Wire cross section min. (CSA)	26 AWG		

Clampable wires (additional connection)

Clamping range, further connection, min.	0.13 mm ²	Clamping range, further connection, max.	6 mm ²
Rated cross-section, further connection	4 mm ²	Connection direction	on side
Number of connections, additional connection	1	Conductor cross-section, flexible plus plastic collar DIN 46228/1, further connection, min.	0.5 mm ²
Conductor cross-section, flexible plus plastic collar DIN 46228/1, further connection, max.	2.5 mm ²		

W-Series
WDL 2.5/N/L

Weidmüller Interface GmbH & Co. KG
 Klingenbergstraße 16
 D-32758 Detmold
 Germany
 Fon: +49 5231 14-0
 Fax: +49 5231 14-292083
 www.weidmueller.com

Technical data
Clampable wires (rated connection)

Type of connection	Screw connection	Stripping length	8 mm
Blade size	0.6 x 3.5 mm	Connection direction	on side
Number of connections	3	Clamping range, rated connection, min.	0.13 mm ²
Clamping range, rated connection, max.	4 mm ²	Clamping screw	M 2.5
Tightening torque, min.	0.4 Nm	Tightening torque, max.	0.6 Nm
Torque level with DMS electric screwdriver	1	Gauge to IEC 60947-1	A3
Wire connection cross section, solid core, min. rated connection	0.5 mm ²	Wire connection cross section, solid core max. rated connection	4 mm ²
Wire connection cross section, stranded, rated connection, min.	1.5 mm ²	Wire connection cross section, stranded, rated connection, max.	4 mm ²
Wire connection cross section, finely stranded, max.	4 mm ²	Wire connection cross-section, finely stranded, min.	0.5 mm ²
Wire connection cross section, finely stranded with wire-end ferrules DIN 46228/1, rated connection, min.	0.5 mm ²	Wire connection cross section, finely stranded with wire-end ferrules DIN 46228/1, rated connection, max.	2.5 mm ²
Cross-section for connected conductor, finely stranded with wire-end ferrules and plastic collars DIN 46228/4, rated connection, min.	0.5 mm ²	Wire connection cross-section, finely stranded with wire-end ferrules and plastic collars DIN 46228/4, rated connection, max.	4 mm ²
Wire connection cross section AWG, min.	AWG 26	Wire connection cross section AWG, max.	AWG 12

Other connections

Number of connections, additional connection	1
--	---

Rated data

Rated cross-section	2.5 mm ²	Rated voltage	400 V
Rated impulse withstand voltage	6 kV	Rated current	24 A
Current at maximum wires	32 A	Standards	IEC 60947-7-1
Pollution severity	3		

UL ratings data

Certificate No. (UR)	E60693	Voltage size C (UR)	300 V
Current size C (UR)	15 A	Conductor size Factory wiring max. (UR)	12 AWG
Conductor size Factory wiring min. (UR)	26 AWG	Conductor size Field wiring max. (UR)	12 AWG

Material data

Material	Wemid	Colour	Dark Beige
UL 94 flammability rating	V-0		

System specifications

Product family	W-Series	Type of connection	Screw connection
Connection direction	on side	Number of levels	2
Number of connections	3	No. of clamping points per level	2
Levels cross-connected internally	No	Mounting rail	TS 35
End cover plate required	Yes	PE connection	No

Data sheet

W-Series
WDL 2.5/N/L

Weidmüller Interface GmbH & Co. KG
Klingenbergstraße 16
D-32758 Detmold
Germany
Fon: +49 5231 14-0
Fax: +49 5231 14-292083
www.weidmueller.com

Technical data

Classifications

ETIM 3.0	EC001329	ETIM 4.0	EC001329
ETIM 5.0	EC001329	ETIM 6.0	EC001329
UNSPSC	30-21-18-11	eClass 5.1	27-14-11-25
eClass 6.2	27-14-11-25	eClass 7.1	27-14-11-25
eClass 8.1	27141125	eClass 9.0	27141125

Product information

Descriptive text technical data Further connection refers to clamping point at top left (A4) 2-conductor, 1.5 mm², solid, with 0.6 Nm

Approvals

Approvals



ROHS Conform

Data sheet

W-Series
WDL 2.5/N/L

Weidmüller Interface GmbH & Co. KG
Klingenbergstraße 16
D-32758 Detmold
Germany
Fon: +49 5231 14-0
Fax: +49 5231 14-292083
www.weidmueller.com

Drawings

