

VPU AC I 3+1 440/25 LCF

Weidmüller Interfaces GmbH & Co. KG

Postfach 3030


32760 Detmold

Tel. +49 5231 14-0

Fax. +49 5231 14-2083

info@weidmueller.com

www.weidmueller.com

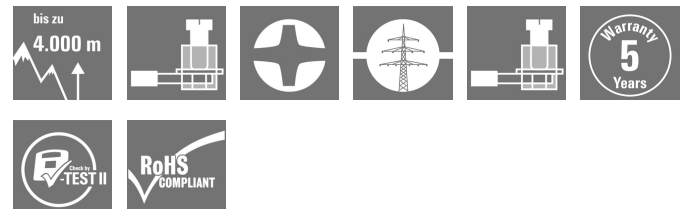

Weidmüller VPU I (Type I), VPU II (Type II) and VPU III (Type III) surge protection products effectively reduce the interference coupling that can occur due to transient surge voltages, even significantly below the limits prescribed by insulation co-ordination according to EN 60664-3 / DIN VDE 0110-3. This means that the whole installation is exposed to fewer malfunctions. The arresters are co-ordinated using technical means. This means that decoupling between Types I, II and III is unnecessary. The arresters are tested according to product standard IEC 61643-11 / DIN EN 61643-11 and can be installed in systems according to IEC 61643-12 / VDE 0675-6-12 and IEC 62305-4 / VDE 0185-4. This lightning and surge protection device is suited for installation in power supply systems. Weidmüller offers different products depending on the particular mains network type and voltage level. A special Type I and Type II protective device is even available for photovoltaic applications.

General ordering data

Version	Surge voltage arrester, Low voltage, Surge protection, TN-C-S, TN-S, TT, IT with N, IT without N
Order No.	2619240000
Type	VPU AC I 3+1 440/25 LCF
GTIN (EAN)	4050118634662
Qty.	1 pc(s).

VPU AC I 3+1 440/25 LCF

Weidmüller Interfaces GmbH & Co. KG

Postfach 3030

32760 Detmold

Tel. +49 5231 14-0

Fax. +49 5231 14-2083

info@weidmueller.com

www.weidmueller.com

Technical data

Dimensions and weights

Depth	93 mm	Depth (inches)	3.661 inch
Height	96.3 mm	Height (inches)	3.791 inch
Width	144 mm	Width (inches)	5.669 inch
Net weight	25 g		

Temperatures

Storage temperature	-40 °C...85 °C	Operating temperature	-40 °C...85 °C
Humidity	5 - 95% rel. humidity		

Probability of failure

MTBF	15 Years
------	----------

General data

Colour	black	Design	Installation housing; 8 TE, Insta IP 20
Operating altitude	≤ 2000 m	Optical function display	green = OK; red = arrester is defective - replace
Protection degree	IP20 in installed state	Rail	TS 35
Segment	Power distribution	Suitable for	Count-in installation (leakage current free)
UL 94 flammability rating	V-0	Version	Surge protection

Insulation coordination acc. to EN 50178

Pollution severity	2	Surge voltage category	III
--------------------	---	------------------------	-----

Rated data IEC / EN

Discharge current I_{max} (8/20 μ s) wire-PE	100 kA	Discharge current I_{max} (8/20 μ s) N-PE	100 kA
Discharge current I_n (8/20 μ s) N-PE	100 kA	Discharge current I_n (8/20 μ s) wire-PE	25 kA
Energy coordination (≤10 m)	Type I, Type II, Type III	Follow-on current extinguishing capability I_{fi}	Not available due for technical reasons
Frequency range, max.	60 Hz	Frequency range, min.	50 Hz
Fuse	250 A gL (if back up fuse > 250 A)	Leakage current at U_n	5 μ A
Lightning test current I_{imp} (10/350 μ s) (L-PE)	25 kA	Lightning test current, I_{imp} (10/350 μ s) (N-PE)	100 kA
Low voltage network	TN-C-S, TN-S, TT, IT with N, IT without N	Mains voltage	400 V / 690 V
Max. continuous voltage, U_c (AC)	440 V	Max. continuous voltage, U_c (N-PE)	440 V
Number of poles	4	Protection level U_p at I_N (L/N-PE)	≤ 2.5 kV
Protection level U_p at I_N (N-PE)	≤ 2.5 kV	Rated load current I_L	100 A
Rated voltage (AC)	400 V	Requirements category acc. to IEC 61643-11	Type I, Type II
Requirements class, acc. to EN 61643-11	T1, T2	Response time	≤ 25 ns, ≤ 100 ns
Short-circuit current rating I_{SCCR}	50 kA	Signalling contact	No
Standards	IEC61643-11, EN61643-11	Suitable for	Count-in installation (leakage current free)
Temporary surge voltage (over-voltage) - TOV	762 V	Voltage type	AC

Creation date 30 May 2022 13:27:11 CEST

Catalogue status 20.05.2022 / We reserve the right to make technical changes.

2

VPU AC I 3+1 440/25 LCF

Weidmüller Interfaces GmbH & Co. KG

Postfach 3030

32760 Detmold

Tel. +49 5231 14-0


Fax. +49 5231 14-2083

info@weidmueller.com

www.weidmueller.com

Drawings

Electric symbol

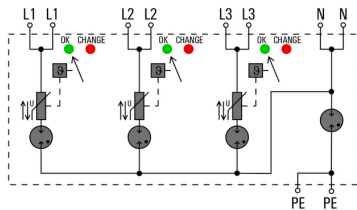

Schematic circuit diagram