

VPU AC I 3+1 R 275/25 LCF S 2PE

Weidmüller Interface GmbH & Co. KG
 Klingenbergstraße 26
 D-32758 Detmold
 Germany


www.weidmueller.com

Product image



Abb.ähnlich

Weidmüller VPU I (Type I), VPU II (Type II) and VPU III (Type III) surge protection products effectively reduce the interference coupling that can occur due to transient surge voltages, even significantly below the limits prescribed by insulation co-ordination according to EN 60664-3 / DIN VDE 0110-3. This means that the whole installation is exposed to fewer malfunctions. The arresters are co-ordinated using technical means. This means that decoupling between Types I, II and III is unnecessary. The arresters are tested according to product standard IEC 61643-11 / DIN EN 61643-11 and can be installed in systems according to IEC 61643-12 / VDE 0675-6-12 and IEC 62305-4 / VDE 0185-4. This lightning and surge protection device is suited for installation in power supply systems. Weidmüller offers different products depending on the particular mains network type and voltage level. A special Type I and Type II protective device is even available for photovoltaic applications.

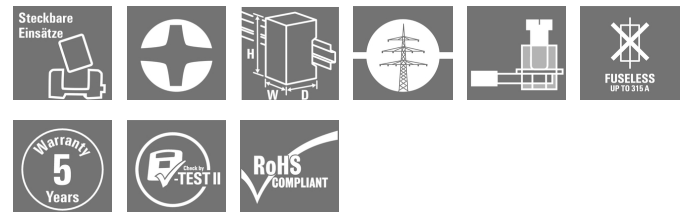

General ordering data

Version	Surge voltage arrester, Low voltage, Surge protection, Leakage-current-free, with remote contact, TN-C-S, TN-S, TT, IT with N, IT without N
Order No.	2726770000
Type	VPU AC I 3+1 R 275/25 LCF S 2PE
GTIN (EAN)	4050118802511
Qty.	1 pc(s).
Replacement parts	2730850000 2730860000 2855300000

VPU AC I 3+1 R 275/25 LCF S 2PE
Weidmüller Interface GmbH & Co. KG

Klingenbergstraße 26

D-32758 Detmold

Germany

www.weidmueller.com

Technical data
Dimensions and weights

Depth	91 mm	Depth (inches)	3.583 inch
Height	104.5 mm	Height (inches)	4.114 inch
Width	72 mm	Width (inches)	2.835 inch
Net weight	679 g		

Temperatures

Storage temperature	-40 °C...85 °C	Operating temperature	-40 °C...85 °C
Humidity	5 - 95% rel. humidity		

Connection data, remote alert

Connection type	PUSH IN	Cross-section for connected wire, solid core, max.	1.5 mm ²
Cross-section for connected wire, solid core, min.	0.14 mm ²	Stripping length	8 mm

General data

Colour	black, orange, blue	Design	Installation housing; 4TE, Insta IP 20
Operating altitude	≤ 2000 m	Optical function display	green = OK; red = arrester is defective - replace
Protection degree	IP20 in installed state	Rail	TS 35
Segment	Power distribution	UL 94 flammability rating	V-0
Version	Surge protection, Leakage-current-free, with remote contact		

Insulation coordination acc. to EN 50178

Pollution severity	2	Surge voltage category	IV
--------------------	---	------------------------	----

VPU AC I 3+1 R 275/25 LCF S 2PE
Weidmüller Interface GmbH & Co. KG

Klingenbergstraße 26

D-32758 Detmold

Germany

www.weidmueller.com

Technical data
Rated data IEC / EN

Discharge current I_{max} (8/20 μ s) wire-PE	65 kA	Discharge current I_{max} (8/20 μ s) N-PE	150 kA
Discharge current I_n (8/20 μ s) N-PE	100 kA	Discharge current I_n (8/20 μ s) wire-PE	25 kA
Discharge current, I_{imp} (10/350 μ s)	25 kA	Energy coordination (≤ 10 m)	Type I, Type II, Type III
Follow-on current extinguishing capability I_{fi}	50 kA	Frequency range, max.	60 Hz
Frequency range, min.	50 Hz	Fuse	No Fuse necessary ≤ 315 A gL
Leakage current at U_n	1 μ A	Lightning test current I_{imp} (10/350 μ s) (L-PE)	25 kA
Lightning test current, I_{imp} (10/350 μ s) (N-PE)	100 kA	Low voltage network	TN-C-S, TN-S, TT, IT with N, IT without N
Mains voltage	230 V / 400 V	Max. continuous voltage, U_c (AC)	275 V
Max. continuous voltage, U_c (N-PE)	305 V	Note follow current capability	No tripping of a 16 A gG fuse up to prospective 50 kA_{eff}
Number of poles	4	PE conductor current I_{PE}	1 μ A
Protection level U_p at I_N (L/N-PE)	≤ 1.5 kV, ≤ 1.7 kV	Protection level U_p at I_N (N-PE)	≤ 1.7 kV
Rated voltage (AC)	230 V	Requirements category acc. to IEC 61643-11	Type I, Type II
Requirements class, acc. to EN 61643-11	T1, T2	Response time	< 100 ns
Short-circuit current rating I_{SCCR}	50 kA	Signalling contact	250 V 1A 1CO
Standards	IEC61643-11, EN61643-11	Temporary surge voltage (over-voltage) - TOV	442 V
Voltage type	AC		

Connection data

Stripping length	15 mm	Wire connection method	Screw connection
Type of connection	Screw connection	Stripping length, rated connection	15 mm
Tightening torque, min.	2.5 Nm	Tightening torque, max.	4.5 Nm
Clamping range, rated connection	16 mm ²	Clamping range, min.	4 mm ²
Clamping range, max.	35 mm ²	Wire cross-section, solid, min.	2.5 mm ²
Wire cross-section, solid, max.	35 mm ²	Wire connection cross section, finely stranded, min.	2.5 mm ²
Wire connection cross section, finely stranded, max.	35 mm ²	Conductor cross-section, flexible, AEH (DIN 46228-1), min.	2.5 mm ²
Conductor cross-section, flexible, AEH (DIN 46228-1), max.	35 mm ²	Connection cross-section, stranded, min.	2.5 mm ²
Connection cross-section, stranded, max.	35 mm ²		

Guarantee

Time interval	5 years
---------------	---------

Classifications

ETIM 6.0	EC000941	ETIM 7.0	EC000941
ETIM 8.0	EC000941	ECLASS 9.0	27-13-08-05
ECLASS 9.1	27-13-08-05	ECLASS 10.0	27-13-08-05
ECLASS 11.0	27-13-08-05	ECLASS 12.0	27-17-90-90

VPU AC I 3+1 R 275/25 LCF S 2PE

Weidmüller Interface GmbH & Co. KG
Klingenbergstraße 26
D-32758 Detmold
Germany

www.weidmueller.com

Technical data

Important note

Product information Only applicable to IT power systems where the earth on the distribution transformer is interconnected with the earth on the consumer side (RE=RA in Figure 44.A1 of IEC 60634-4-44:2018). For use in DC applications, please use the fuse of SIBA Type NH2XL aR/aSF DC 1500 V

Approvals

Approvals



ROHS Conform

Downloads

Approval/Certificate/Document of Conformity	EU Konformitätserklärung / EU Declaration of Conformity
Engineering Data	CAD data – STEP
Tender specification	Ausschreibungstext DE Tenderspecification EN
User Documentation	Beipackzettel / Instruction sheet
Catalogues	Catalogues in PDF-format


VPU AC I 3+1 R 275/25 LCF S 2PE

Weidmüller Interface GmbH & Co. KG
Klingenbergstraße 26
D-32758 Detmold
Germany

www.weidmueller.com

Drawings

Electric symbol

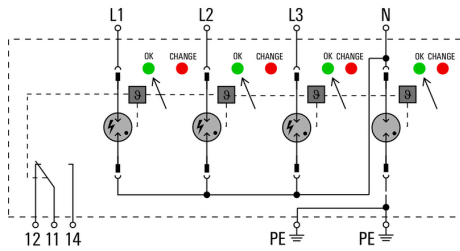

Schematic circuit diagram