

Lightning/surge arrester type 1/2 - VAL-MB-T1/T2 1000DC-PV/2+V



2905639

<https://www.phoenixcontact.com/gb/products/2905639>

Please be informed that the data shown in this PDF document is generated from our Online Catalog. Please find the complete data in the user documentation. Our General Terms of Use for Downloads are valid.



Lightning current arrester/surge protective device for 2-pos. isolated and grounded 1,000 V DC PV systems, for DIN rail mounting, temperature-monitored protective elements, status message on the module.

Your advantages

- Space-saving installation, thanks to the compact design
- Double terminal block for safe and easy equipotential bonding connection
- Screw shafts with raised domes to ensure safe working
- Main connections with extended insertion funnels for increased resistance to creepage
- Visual display for checking the status directly on the device

Commercial Data

Item number	2905639
Packing unit	1 pc
Minimum order quantity	1 pc
Sales Key	CL1231
Product Key	CL1231
Catalog Page	Page 51 (C-4-2019)
GTIN	4046356984447
Weight per Piece (including packing)	438.8 g
Weight per Piece (excluding packing)	413.68 g
Customs tariff number	85363030
Country of origin	DE

Lightning/surge arrester type 1/2 - VAL-MB-T1/T2 1000DC-PV/2+V



2905639

<https://www.phoenixcontact.com/gb/products/2905639>

Technical Data

Product properties

IEC test classification	PV I / II
	PV T1 / T2
EN type	T1 / T2
IEC power supply system	DC
Type	DIN rail module, one-piece
Product type	PV arrester
Installation location	Interior
Installation location of the disconnect device	Internal
Accessibility	Accessible
Connection configuration	Y configuration
SPD failure behavior	OCFM (Open-Circuit Failure Mode)
Surge protection fault message	optical

Insulation characteristics

Pollution degree	2
------------------	---

Connection data

Connection method	Screw connection
Screw thread	M5
Tightening torque	3 Nm
Stripping length	16 mm
Conductor cross section flexible	2.5 mm ² ... 35 mm ²
Conductor cross section AWG	14 ... 2
Two conductors with the same cross section stranded, with ferrule and without plastic sleeve, minimum	2.5 mm ²
Two conductors with the same cross section stranded, with ferrule and without plastic sleeve, maximum	10 mm ²

Dimensions

Dimensional drawing	
Width	71.2 mm
Width	71.2 mm
Height	120 mm
Height	120 mm
Depth	65.5 mm
Depth	65.5 mm
Horizontal pitch	4 Div.

Lightning/surge arrester type 1/2 - VAL-MB-T1/T2 1000DC-PV/2+V



2905639

<https://www.phoenixcontact.com/gb/products/2905639>

Material specifications

Color	traffic grey A RAL 7042
Flammability rating according to UL 94	V-0
Insulating material	PA 6.6
	PBT
Housing material	PA 6.6

Mechanical properties

Mechanical data

Open side panel	No
-----------------	----

Protective circuit

Mode of protection	(L+) - (L-)
	(L+) - PE
	(L-) - PE
Direction of action	(L+)-PE & (L-)-PE & (L+)-(L-)
Rated load current I_L	50 A
Residual current I_{PE}	$\leq 70 \mu\text{A DC}$
	$\leq 500 \mu\text{A AC}$
Standby power consumption P_C	$\leq 70 \text{ mVA}$
Nominal discharge current I_n (8/20) μs	20 kA
Maximum discharge current I_{max} (8/20) μs	40 kA
Impulse discharge current (10/350) μs , charge	3.125 As
Impulse discharge current (10/350) μs , specific energy	9.77 kJ/ Ω
Impulse discharge current (10/350) μs , peak value I_{imp}	6.25 kA
Total discharge current I_{total} (8/20) μs	40 kA
Total discharge current I_{total} (10/350) μs	12.5 kA
Voltage protection level U_p	$\leq 3.3 \text{ kV}$
Residual voltage U_{res}	$\leq 3.3 \text{ kV}$ (at I_n)
	$\leq 2.5 \text{ kV}$ (at 3 kA)
	$\leq 2.7 \text{ kV}$ (at 6.25 kA)
	$\leq 2.9 \text{ kV}$ (at 10 kA)
	$\leq 3.1 \text{ kV}$ (at 15 kA)
	$\leq 4 \text{ kV}$ (at 40 kA)
Response time t_A	$\leq 25 \text{ ns}$

PV protective circuit

Connection configuration	Y configuration
SPD failure behavior	OCFM (Open-Circuit Failure Mode)

Protective circuit DC voltage side (DC)

Open circuit voltage U_{OCSTC}	$\leq 833 \text{ V DC}$
----------------------------------	-------------------------

Lightning/surge arrester type 1/2 - VAL-MB-T1/T2 1000DC-PV/2+V



2905639

<https://www.phoenixcontact.com/gb/products/2905639>

Maximum discharge current I_{\max} (8/20) μs	40 kA
Response time t_A	≤ 25 ns
Impulse discharge current (10/350) μs , charge	3.125 As
Impulse discharge current (10/350) μs , specific energy	9.77 kJ/ Ω
Impulse discharge current (10/350) μs , peak value I_{imp}	6.25 kA
Total discharge current I_{total} (8/20) μs	40 kA
Total discharge current I_{total} (10/350) μs	12.5 kA
Insulation resistance R_{iso}	> 5 G Ω (at 500 V DC)
Nominal discharge current I_n (8/20) μs	20 kA
Rated load current I_L	50 A
Continuous operating current I_{CPV}	< 70 μA
Maximum continuous operating voltage U_{CPV}	1000 V DC
Short-circuit current rating I_{SCPV}	2000 A
Residual voltage U_{res}	≤ 3.3 kV (at I_n) ≤ 2.5 kV (at 3 kA) ≤ 2.7 kV (at 6.25 kA) ≤ 2.9 kV (at 10 kA) ≤ 3.1 kV (at 15 kA) ≤ 4 kV (at 40 kA)
Residual current I_{PE}	≤ 70 μA DC ≤ 500 μA AC
Voltage protection level U_p	≤ 3.3 kV
Standby power consumption P_C	≤ 70 mVA

Environmental and real-life conditions

Ambient conditions

Degree of protection	IP20 (only when all terminal points are used)
Ambient temperature (operation)	-40 °C ... 80 °C
Ambient temperature (storage/transport)	-40 °C ... 80 °C
Altitude	≤ 6000 m (amsl (above mean sea level))
Permissible humidity (operation)	5 % ... 95 %
Shock (operation)	50g (Half-sine / 11 ms / 3x $\pm X$, $\pm Y$, $\pm Z$)
Vibration (operation)	5g (5 - 500 Hz/2.5 h/X, Y, Z)

Standards and regulations

Standards/specifications	EN 61643-31
Standards/specifications	IEC 61643-31

Mounting

Mounting type	DIN rail: 35 mm
---------------	-----------------


Lightning/surge arrester type 1/2 - VAL-MB-T1/T2 1000DC-PV/2+V

2905639

<https://www.phoenixcontact.com/gb/products/2905639>

Drawings

Dimensional drawing

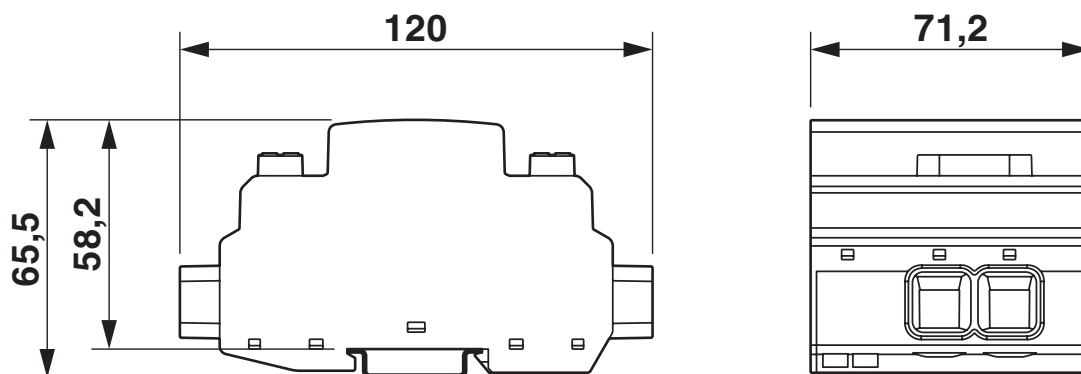


Lightning/surge arrester type 1/2 - VAL-MB-T1/T2 1000DC-PV/2+V



2905639

<https://www.phoenixcontact.com/gb/products/2905639>

Circuit diagram

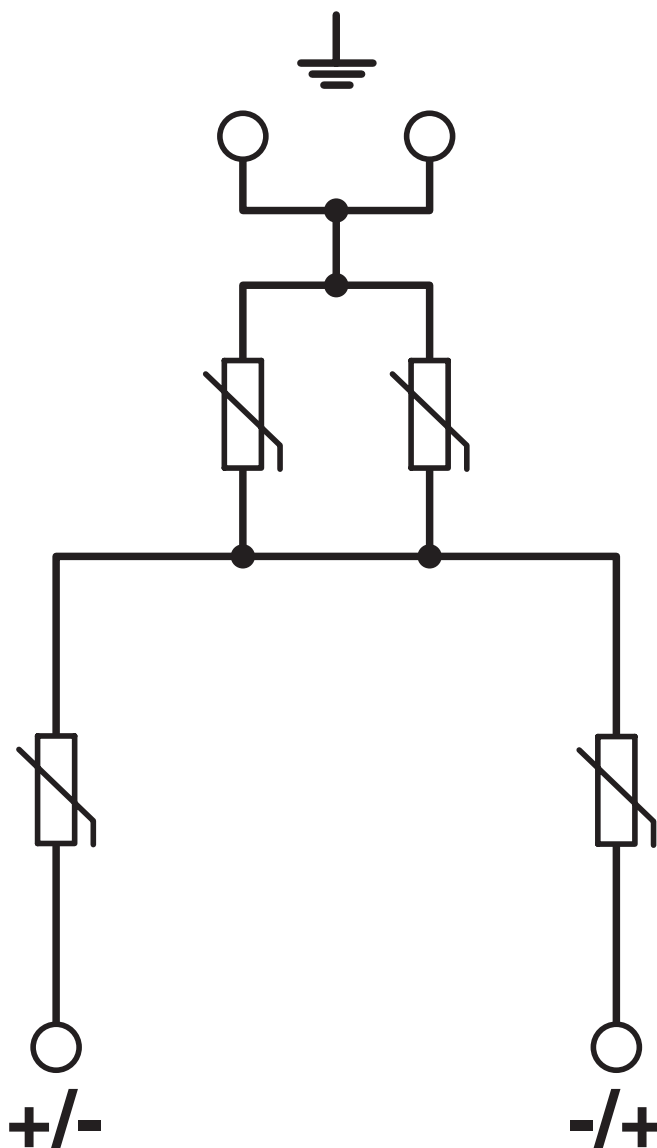

Lightning/surge arrester type 1/2 - VAL-MB-T1/T2 1000DC-PV/2+V



2905639

<https://www.phoenixcontact.com/gb/products/2905639>

Approvals



IECEE CB Scheme

Approval ID: NL-81007

CCA

Approval ID: NTR-NL 7938

Nominal Voltage U_N

Nominal Current I_N

Cross Section AWG

Cross Section mm^2

-

-



KEMA-KEUR

Approval ID: 71-123545

Lightning/surge arrester type 1/2 - VAL-MB-T1/T2 1000DC-PV/2+V



2905639

<https://www.phoenixcontact.com/gb/products/2905639>

Classifications

ECLASS

ECLASS-9.0	27130802
ECLASS-10.0.1	27130802
ECLASS-11.0	27130802

ETIM

ETIM 8.0	EC000381
----------	----------

UNSPSC

UNSPSC 21.0	39121600
-------------	----------

Lightning/surge arrester type 1/2 - VAL-MB-T1/T2 1000DC-PV/2+V



2905639

<https://www.phoenixcontact.com/gb/products/2905639>

Environmental Product Compliance

China RoHS

Environmentally friendly use period: unlimited = EFUP-e

No hazardous substances above threshold values

Lightning/surge arrester type 1/2 - VAL-MB-T1/T2 1000DC-PV/2+V



2905639

<https://www.phoenixcontact.com/gb/products/2905639>

Accessories

Marker pen

Marker pen - X-PEN 0,35 - 0811228

<https://www.phoenixcontact.com/gb/products/0811228>



Marker pen without ink cartridge, for manual labeling of markers, labeling extremely wipe-proof, line thickness 0.35 mm

Partition plate

Partition plate - ATP-QTTCB - 3206238

<https://www.phoenixcontact.com/gb/products/3206238>

Partition plate, length: 102 mm, width: 2 mm, height: 54 mm, color: gray



Phoenix Contact 2022 © - all rights reserved
<https://www.phoenixcontact.com>

PHOENIX CONTACT Ltd
Halesfield 13, Telford
Shropshire, TF7 4PG
01952 681700
info@phoenixcontact.co.uk