

TABLE MAT
32-190-11xx


Double layer table mat with a dissipative top-layer and a conductive bottom layer

Physical properties

Abrasion resistance:	≤ 200 mm ³ (ISO 4649, Method A)
Hardness:	75 Shore A +/-5 (ISO 7619)
Residual indentation:	≤ 0.2 mm (EN 433)
Thickness:	2.0 mm
Max. Temperature	450°C

Electrical properties

Resistant to ground:	≤10 ⁹ Ω
Surface resistance:	≤1.0 x 10 ⁹ Ω
Compliant to:	IEC 61340-5-1

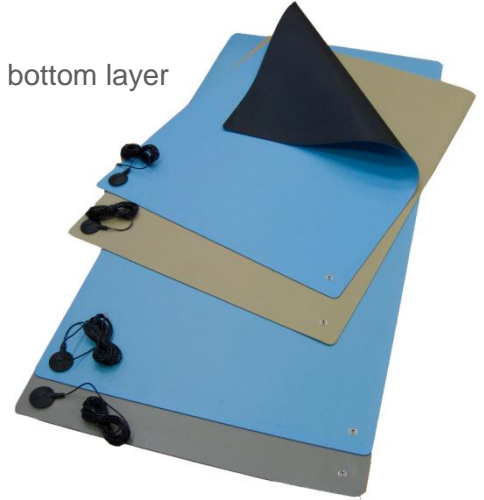

Options

Other cut sizes and mat equipment available on request

Dimensions, Features and Part Number

Part Number	Shape	Color	Dimensions	Caracteristics	Properties			
32-200-4609	Kits	Blue	60x90 cm	2 CONNECTIONS 10MM STUD, KIT WITH GROUNDING CABLE 10MM STUD/GSGS 4,5M	Pre-cut mat kits are supplied with 2 x 10mm male studs on one of the short side			
32-200-3609		Grey						
32-200-2609		Beige						
32-200-4612		Blue	60x120 cm					
32-200-3612		Grey						
32-200-2612		Beige						
32-290-6000	Pre-cut	Blue	60x90 cm	2 CONNECTIONS 10MM STUD, KIT WITH RED FABRIC WRIST STRAP AND COIL CORD 7MM CONNECTION + GROUNDING CABLE EU				
32-290-6001				2 CONNECTIONS 10MM STUD, KIT WITH RED FABRIC WRIST STRAP AND COIL CORD 7MM CONNECTION + GROUNDING CABLE CHUKO				
32-290-6106	Pre-cut	Blue	80x200 cm	3 CONNECTIONS 10MM STUD	Pre-cut mats are supplied with 3 x 10mm male studs			
32-290-6110		Grey						
32-290-6114		Beige						
32-290-6107		Blue	80x180 cm					
32-290-6111		Grey						
32-290-6115		Beige						
32-290-6109		Blue	80x160 cm					
32-290-6113		Grey						
32-290-6117		Beige						
32-190-6021		Pre-cut	Blue			60x120 cm		
32-190-6009			Grey					
32-190-6006			Beige					
32-290-6108	Blue		60x90 cm					
32-290-6112	Grey							
32-290-6116	Beige							

+ - + - + - + -



SOLUTION GLOBALE
DE PROTECTION AUX ESD

-EUROSTAT-
A MEMBER OF **DOU YEE**

32-190-6007	Pre-cut	Blue	60x120cm	3 CONNECTIONS 10MM STUD	Pre-cut mats are supplied with 3 x 10mm female studs
32-190-1204	On roll	Blue	100cmx10m		
32-190-1203		Grey			
32-190-1202		Beige			
32-190-1104		Blue	122cmx10m		
32-190-1103		Grey			
32-190-1102		Beige			