



Wire Protection & Management > Interconnect Devices > SolderSleeve Shield Terminators



SolderSleeve Shield Terminator Product Type: **Cable Terminator, Shield Terminator, Wire Terminator**

Operating Temperature (Max): **125 °C**

Expanded Inside Diameter (Min): **6 mm [.236 in]**

Recovered Inside Diameter (Max): **3.3 mm [.13 in]**

Pre-Installed Lead: **No**

Features

Product Type Features

Temperature Indicator	Yes
Temperature Indicator Type	Thermochromic
SolderSleeve Shield Terminator Product Type	Cable Terminator, Shield Terminator, Wire Terminator

Configuration Features

Pre-Installed Lead	No
--------------------	----

Dimensions

Overall Length	32 mm[1.26 in]
Shield Outside Diameter (Min)	3.3 mm[.13 in]
Jacket Outside Diameter	6 mm[.236 in]
Expanded Inside Diameter (Min)	6 mm[.236 in]
Recovered Inside Diameter (Max)	3.3 mm[.13 in]

Usage Conditions

Operating Temperature (Max)	125 °C
Resistance Properties	Splash Protection
Wire Temperature (Max)	85 °C

Industry Standards

Government Qualified	No
----------------------	----



Product Compliance

[For compliance documentation, visit the product page on TE.com>](#)

EU RoHS Directive 2011/65/EU	Not Compliant
EU ELV Directive 2000/53/EC	Not Compliant
China RoHS 2 Directive MIIT Order No 32, 2016	Restricted Materials Above Threshold
EU REACH Regulation (EC) No. 1907/2006	<p>Current ECHA Candidate List: JAN 2022 (223)</p> <p>Candidate List Declared Against: JUL 2021 (219)</p> <p>SVHC > Threshold:</p> <p>Pb (32% in Solder)</p> <p>Cd (18% in Solder)</p> <p>Article Safe Usage Statements: Use personal protective equipment as required. Do not eat, drink or smoke when using this product. Wash thoroughly after handling. Recycle if possible and dispose of the article by following all applicable governmental regulations relevant to your geographic location.</p>
Halogen Content	Low Halogen - Br, Cl, F, I < 900 ppm per homogenous material. Also BFR/CFR/PVC Free
Solder Process Capability	Not applicable for solder process capability

Product Compliance Disclaimer

This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked. Additionally, the part numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulation, the information TE provides on SVHC in articles for this part number is based on the latest European Chemicals Agency (ECHA) 'Guidance on requirements for substances in articles' posted at this URL: <https://echa.europa.eu/guidance-documents/guidance-on-reach>

Compatible Parts



TE Part # CJ2087-000
[HL2010E-KIT-120V](#)

Customers Also Bought



TE Part #282618-1
FFC PIN CONTACT TIN-P




TE Part #7-215570-8
MICRO-MATCH PBC.08P



TE Part #182923-1
CPC PLUG ASSY SIZE 23-37



TE Part #678853-000
CWT-7

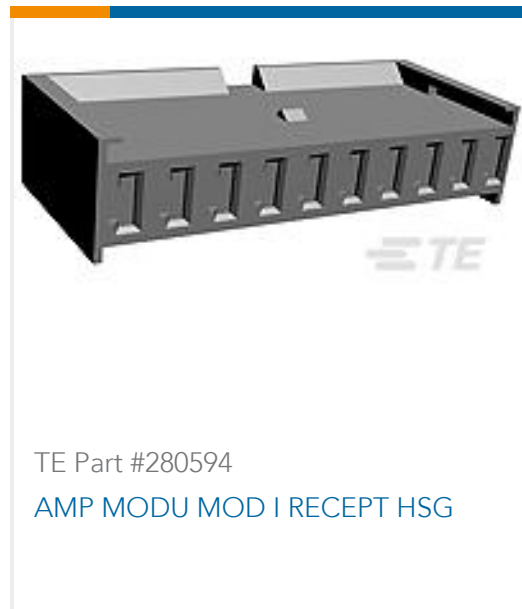

TE Part #280594
AMP MODU MOD I RECEPT HSG



TE Part #155880-000
CWT-11



TE Part #599556-000
CWT-5



TE Part #154717-3
PL 250 REC TERMINAL 14-11 AWG
TPBR



TE Part #4451293001
100F0111-20



TE Part #YD369-MR33-NP10000
369 3 WAY SHIELDED REC, CRIMP,PIN

Documents

Product Drawings

CWT-6

English

Datasheets & Catalog Pages

1654025_Sec8_B-155_CWT_D-110_D-1744

English

Raychem Electrical Interconnect Products

English

Product Specifications

SolderSleeve One-Step Wire and Cable Terminators Installation Procedures for CWT and B-155 Products

English

Product Specification

English