

**PLEASE CHECK WWW.MOLEX.COM FOR LATEST PART INFORMATION**

**Part Number:** **0436400210**  
**Status:** **Active**  
**Overview:** Micro-Fit Connector System  
**Description:** Micro-Fit 3.0 Plug Housing, Single Row, 2 Circuits, UL 94V-2, Panel Mount Ears, Glow-Wire Capable, Black

**Documents:**

<a href="#">3D Model</a>	<a href="#">Test Summary 430450005-TS-000 (PDF)</a>
<a href="#">Drawing (PDF)</a>	<a href="#">Test Summary 430450006-TS-000 (PDF)</a>
<a href="#">3D Model (PDF)</a>	<a href="#">Test Summary TS-43045-001-001 (PDF)</a>
<a href="#">Product Specification 436500001-PS-JA-000 (PDF)</a>	<a href="#">Test Summary TS-43045-002-001 (PDF)</a>
<a href="#">Product Specification 436500001-PS-KO-000 (PDF)</a>	<a href="#">Test Summary TS-43045-003-001 (PDF)</a>
<a href="#">Product Specification 436500001-PS-SP-000 (PDF)</a>	<a href="#">Test Summary TS-46235-001-001 (PDF)</a>
<a href="#">Product Specification PS-43650-001 (PDF)</a>	<a href="#">Datasheet (PDF)</a>
<a href="#">Packaging Specification PK-43640-003-001 (PDF)</a>	<a href="#">RoHS Certificate of Compliance (PDF)</a>

**Agency Certification**

CSA LR19980


**General**

Product Family Crimp Housings  
Series [43640](#)  
Application Power, Wire-to-Wire  
Comments This Molex product is manufactured from material that has the following ratings, tested by independent agencies: <br>a) A Glow Wire Ignition Temperature (GWIT) of at least 775 deg C per IEC 60695-2-13. <br>b) A Glow Wire Flammability Index (GWFI) above 850 deg C per IEC 60695-2-12 and hence complies with the requirements set out in the International Standard IEC 60335-1 5th edition - household and similar electrical appliances - safety, section 30 Resistance to heat and fire. <br><br>The customers using this product must determine its suitability for use in their particular application through testing or other acceptable means as described in end-product glow-wire flammability test standard IEC 60695-2-11 and any applicable product end-use standard(s). <br><br>If it is determined during the customer's evaluation of suitability, that higher performance is required, please contact Molex for possible product options.

Overview Micro-Fit Connector System  
Product Name Micro-Fit 3.0  
UPC 889056721745

**Physical**

Circuits (maximum) 2  
Color - Resin Black  
Flammability 94V-0  
Gender Plug  
Glow-Wire Capable Yes  
Keying to Mating Part None  
Lock to Mating Part Yes  
Material - Resin Nylon  
Net Weight 0.391/g  
Number of Rows 1  
Packaging Type Bag

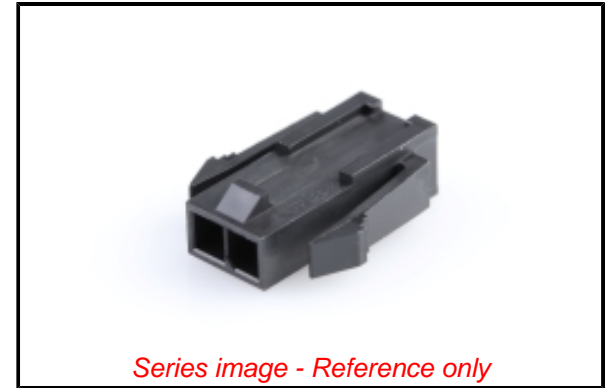

**EU ELV**

**Not Relevant**

**EU RoHS**

**Compliant**

**REACH SVHC**

Not Contained Per -  
D(2021)10043-DC (17  
Jan 2022)

**Halogen-Free**

**Status**

**Not Low-Halogen**

For more information, please visit [Contact US](#)

China ROHS

ELV

RoHS Phthalates

**China RoHS**

Green Image

Not Relevant

Not Contained

**Search Parts in this Series**

[43640 Series](#)

**Mates With**

Micro-Fit 3.0 Receptacle Housing [43645](#)  
<br>Micro-Fit TPA Cable Assembly [145132](#)  
<br>Micro-Fit 3.0 Cable Assembly [214750](#) ,  
[214751](#)

**Use With**

Micro-Fit 3.0 Crimp Terminals [43031](#) <br>  
Micro-Fit 3.0 Pre-Crimped Lead [214762](#) ,  
[214763](#)

Panel Mount	Yes
Pitch - Mating Interface	3.00mm
Polarized to Mating Part	Yes
Stackable	No
Temperature Range - Operating	-40° to +125°C

**Material Info**

**Reference - Drawing Numbers**

Packaging Specification	PK-43640-003-001
Product Specification	436500001-PS-JA-000, 436500001-PS-KO-000, 436500001-PS-SP-000, PS-43650-001
Sales Drawing	SD-43640-002-001
Test Summary	430450005-TS-000, 430450006-TS-000, TS-43045-001-001, TS-43045-002-001, TS-43045-003-001, TS-46235-001-001

This document was generated on 02/24/2022

**PLEASE CHECK [WWW.MOLEX.COM](http://WWW.MOLEX.COM) FOR LATEST PART INFORMATION**