

Printview: Connecting cable; Plug - free end; 5-pole; 3 m long; Coding I; e.g., dimming function (DALI); halogen-free; Conductor ends, bonded: 9 mm - Item No.: 891-8985/216-301



**Connecting cable; Plug - free end; 5-pole; 3 m long; Coding I; e.g., dimming function (DALI); halogen-free; Conductor ends, bonded: 9 mm**



Item No.: 891-8985/216-301

Connecting cable; Plug - free end; 5-pole; 3 m long; Coding I; e.g., dimming function (DALI); halogen-free; Conductor ends, bonded: 9 mm

## Marking

RoHS ✓  
Compliant

## Business data

Supplier	WAGO
Item no.	891-8985/216-301
GTIN / EAN	4055143399494
Content	1
Order amount	1
Customer item number	

## Notes

All WINSTA® components are 100% protected against mismatching in terms of:a.) plugging different number of polesb.) plugging when turned by 180°c.) plugging when laterally staggeredd.) plugging one pole  
Note on Continuous Service Temperature:-35°C ... +85°C  
PVC cable for temperatures 70 °C (including halogen-free)  
Insulating parts for temperatures 105 °C

## Technical data


Miscellaneous	
No. of poles	5
Pin spacing	4.4 mm (0.173 in)

Printview: Connecting cable; Plug - free end; 5-pole; 3 m long; Coding I; e.g., dimming function (DALI); halogen-free; Conductor ends, bonded: 9 mm - Item No.: 891-8985/216-301

<b>Technical data</b>	
<i>Total number of potentials</i>	5
<i>Potential marking</i>	N &#9178; L - +
<i>Color</i>	black
<i>Connector color</i>	blue
<i>Coding</i>	I
<i>Rated voltage (III / 3) [V]</i>	400 [V]
<i>Rated impulse voltage (III / 3) [kV]</i>	6 [kV]
<i>Pollution degree (1)</i>	3
<i>Rated current [A]</i>	16 [A]
<i>Legend for ratings</i>	(III / 3) Overvoltage category III /
<i>Strip length</i>	9 mm / 0.35 Inch
<i>Mating force of a plug-in connection</i>	approx. 20 ... 70 N (depending on pole number)
<i>Unmating force of a plug-in connection</i>	when unlocked: approx. 20 ... 70 N (depending on pole number)
<i>Retention force of a plug-in connection</i>	when locked: > 80N
<i>Insulating material</i>	Polyamide 66 (PA 66)
<i>Flammability class per UL94</i>	V0
<i>Contact material</i>	Copper or copper alloy, surface-treated
<i>Processing temperature</i>	-5°C ... +40°C
<i>Fire load [MJ]</i>	89.938 [MJ]
<i>Weight [g]</i>	448.35 [g]
<i>Marking</i>	N &#9178; L - +

Printview: Connecting cable; Plug - free end; 5-pole; 3 m long; Coding I; e.g., dimming function (DALI); halogen-free; Conductor ends, bonded: 9 mm - Item No.: 891-8985/216-301

## Images & drawings

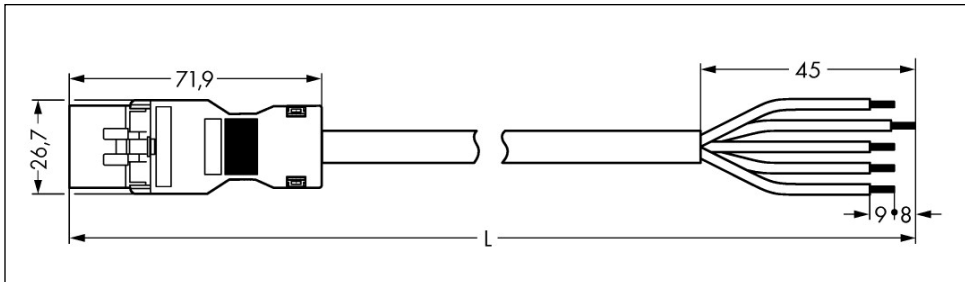

## Address

WAGO Kontakttechnik GmbH & Co. KG

Hansastr. 27

32423 Minden

Telefon: 0571/887-0

Fax: 0571/887-169

<http://www.wago.com>

© WAGO Kontakttechnik GmbH & Co. KG

Technische Änderungen und Irrtümer vorbehalten.