




**213575**  
**BE-A130-G5-K-BS**  
**Barlight**

- Robust solid metal aluminum housing
- Variable cable outlet with strain relief
- High effectiveness due to the latest LED technology
- High efficiency due to optics with a small dispersion angle
- Optimal price-performance ratio
- Industrial-quality M12 connection
- New properties can be modeled with filter disks from the accessories
- Large assortment of mounting products available as accessories

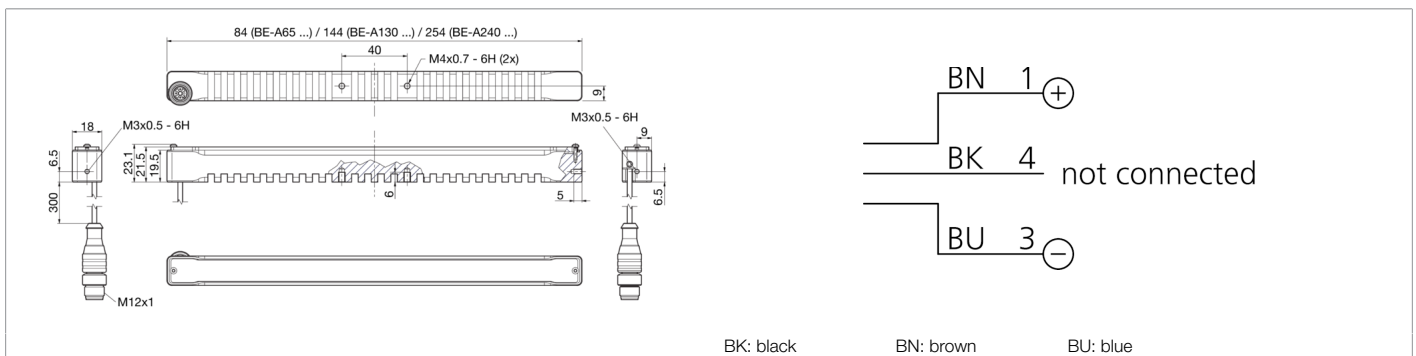

Function									



Technical data (typ.)	+20°C, 24 V DC
Service voltage	24 V DC (Supply Class 2)
Internal power consumption	270 mA (24 V DC)
Power	6,5 W (24 V)
Inverse polarity protection	Yes
Illuminated area	130 x 12 mm
Housing material	Aluminum (Black, Anodized)
Material	PMMA, clear (Protection optics)
Weight	105 g
Protection class	III, operation on protective low voltage
Risk group (DIN EN 62471)	Risk group 1
Design	Barlight
Operating modes	Static
Color selection	No
Light intensity can be adjusted	No
Trigger input high level	No trigger
Trigger input low level	No trigger
Trigger presets	No trigger
Interface	No
Light source	LED
Color	White
Wavelength	6.500 K
Deflection angle FWHM	18°
Light intensity	<ul style="list-style-type: none"> <li>■ 73,0 kLx (100,0 mm)</li> <li>■ 40,0 kLx (200,0 mm)</li> <li>■ 10,0 kLx (500,0 mm)</li> </ul>
Control	without power control



**213575**  
**BE-A130-G5-K-BS**  
**Barlight**

<b>Technical data (typ.)</b>	<b>+20°C, 24 V DC</b>
Shock/vibration load	30 g, 11 ms / 10 ... 55 Hz, 1,0 mm
Ambient temperature during operation	0 ... +40 °C
Protection type	IP 40
Connection	Pigtail, 0,3 m, M12, 3-pin
<b>More information / accessories</b>	<b><a href="https://www.di-soric.com/213575">https://www.di-soric.com/213575</a></b>