

Euromas Polyester

Enclosure, polyester



P 333

Order no.: 04333000

* = Available on request.

Characteristics

Colour of enclosure group
squirrel grey

Protection class
IP 66


Enclosure Material
UP-GF 25-30%, PU foamed seal; for details see Technical Information

Scope of delivery
Lid and base, lid screws made of V2A, earthing screw

Dimensions

Dimensions
260 x 160 x 91 mm

Product drawing

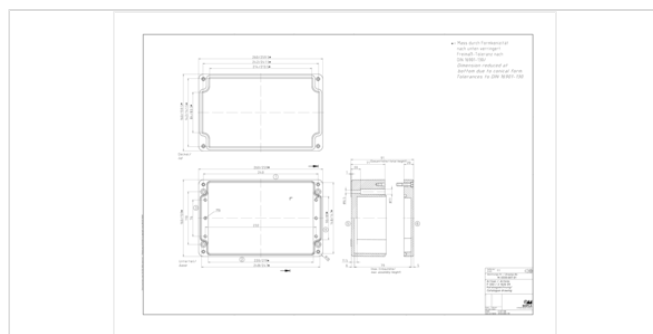

Important!

To compensate for pressure when temperatures change and cause moisture in the enclosure, we recommend that you use a pressure compensation element.

» Additional information

Technical documentation / Downloads

Technical drawings

3D product data in STEP format: Registration necessary
Product drawing in PDF format: 04333000 P-333.pdf (67.7 KB)
Product drawing in DXF format: 04333000 P-333.dxf (473.6 KB)
Drawing for mechanical processing: 04333000 P-333-G.dxf (656.9 KB)
Milling contours are shown here as a DXF file. (Sub D, USB, HDMI, cable

20.02.2020

Product information

Euromas Polyester GB.pdf (308.6 KB)

glands, ...)

Works Test Certificates

683 WPZ-Euomas-Polyester DE.pdf (173.4 KB)

683 WPZ-Euomas-Polyester EN.pdf (152.0 KB)

Matching accessories



Mounting panels, laminated paper (P 305-329) or galvanised sheet steel (P 330-355)

21001800 M

For A 130, P 333



Capstan-headed screws, sealable

21007975 KP

For A 195, P 330, P 333-336, P 339, P 345



Allen cheese-head screw for lid

21007970 IS

For A 195, P 330, P 333-336, P 339



Earthing bars with fitted terminal clamps

21004900 E

For A 130, P 333, P 337-338



Wall brackets, screw-on at rear

21004300 WL

For A 119-198, P 330-355



DIN rails DIN EN 60715 TH 15, galvanised steel

21003505 TS 15

For A 130, P 333



DIN rails DIN EN 60715 G 32, galvanised steel

21003500 TS 32

For A 130, P 333



DIN rails DIN EN 60715 TH 35, galvanised steel

21003510 TS 35

For A 130, P 333



Set of hinges

21007800 SCHED