

Series L5 / Ø 5mm, T-1 3/4

Colour: warm - white

Sloan Part No.: L5-N52N-FTU

Electrical and Optical Characteristics (T_A = 25°C)


Chip			Lens	Absolute Maximum Rating				Electro-optical Data (At 20mA)					Viewing Angle 2 θ 1/2 (deg)
Emitted Colour	Chromaticity Coordinates	Colour Temperature (°K)		Δλ (nm)	Pd (mW)	If (mA)	Peak If (mA)	Vf (V)		Iv Typ. (mcd)			
								Min.	Max.	Min.	Typ.	Max.	
warm white	x=0.41-0.48 y=0.37-0.41	2500-3500	water clear	-	105	30	100	3.2	3.5	3000	4700	6000	50°

Peak Forward Current (1/10 Duty Cycle, 0.1ms Pulse Width)

Absolute Maximum Ratings (T_A = 25 C)


Reverse Voltage	5V
Reverse Current (V _R = 5V)	≤50μA
Operating Temperature Range	- 30°C ~ 85°C
Storage Temperature Range	- 40°C ~ 100°C
Lead Soldering Temperature (3mm below the body)	265°C for 10 seconds

Package Dimensions

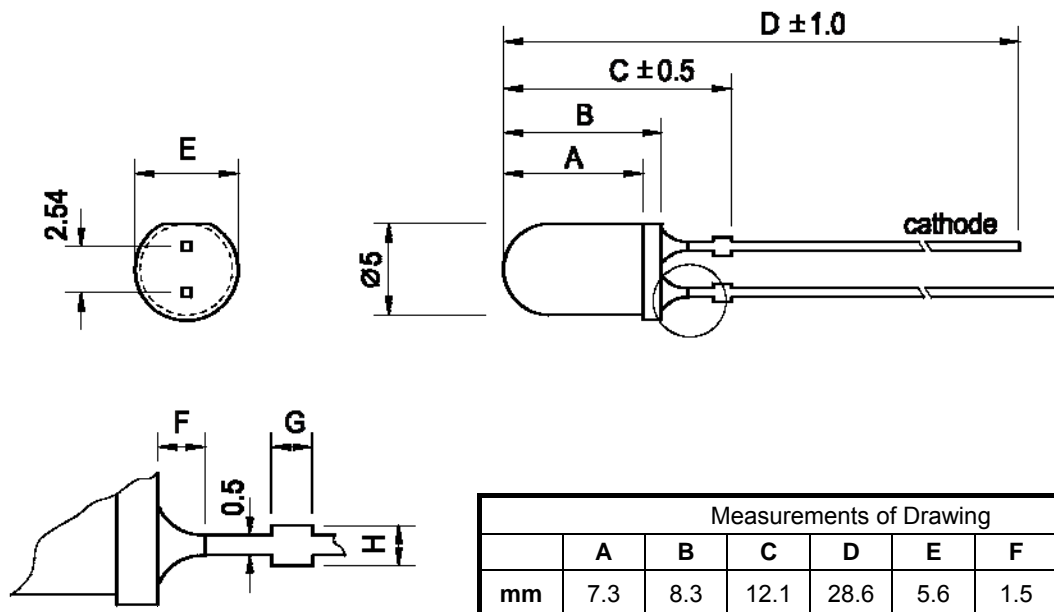


- NOTES:
1. All dimensions are in millimeters.
 2. Tolerance is + 0.25mm unless otherwise specified.
 3. Lead spacing is measured where the leads emerge from the package
 4. Specifications are subject to change without notice.


■ Forward Voltage vs. Forward Current

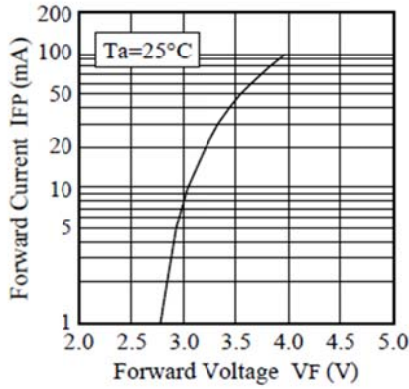


■ Forward Current vs. Relative Luminosity

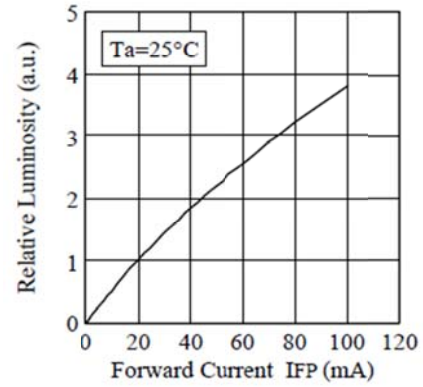


■ Duty Ratio vs. Allowable Forward Current

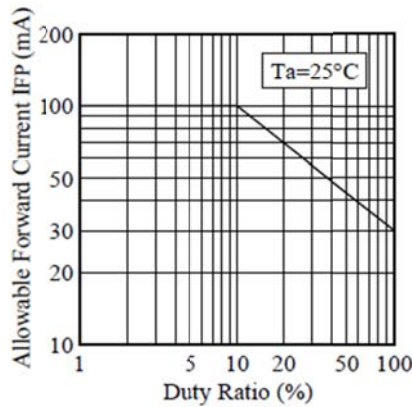


■ Ambient Temperature vs. Forward Voltage

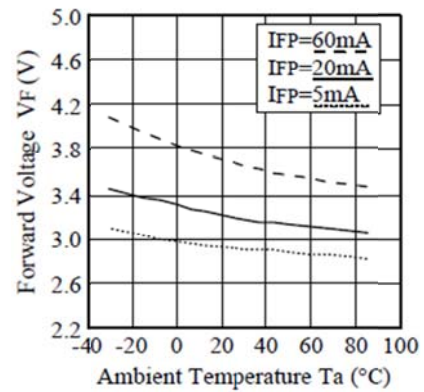

■ Ambient Temperature vs. Relative Luminosity

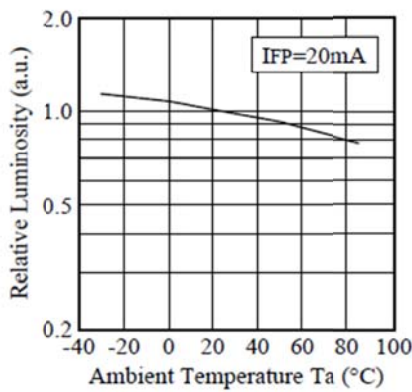


■ Ambient Temperature vs. Allowable Forward Current

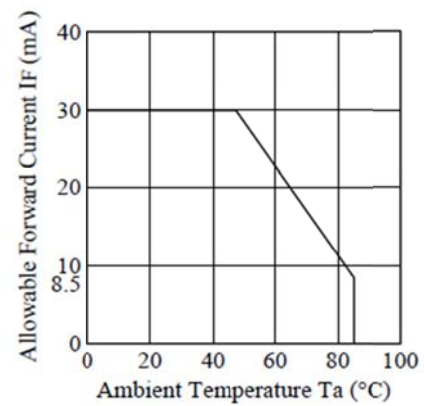


Sloan Part No.: L5-N52N-FTU
 Electrical and Optical Characteristics ($T_A = 25\text{ C}$)


■ Forward Current vs. Chromaticity Coordinate

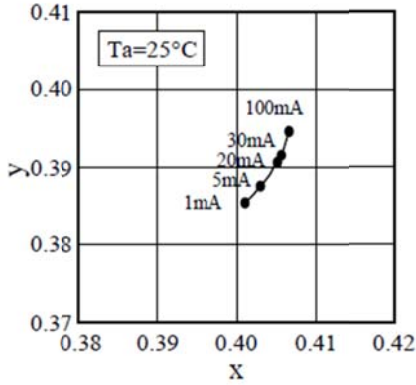


■ Spectrum

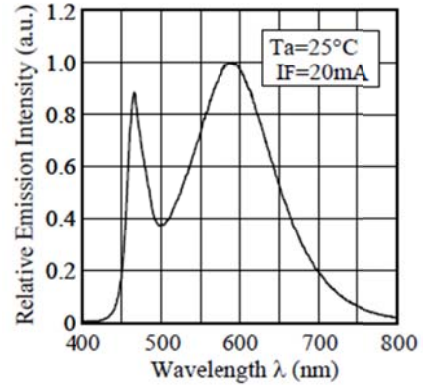

■ Ambient Temperature vs. Chromaticity Coordinate

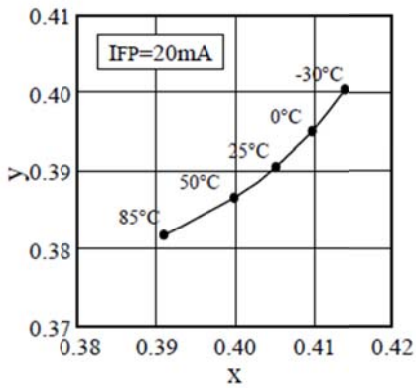

■ Directivity

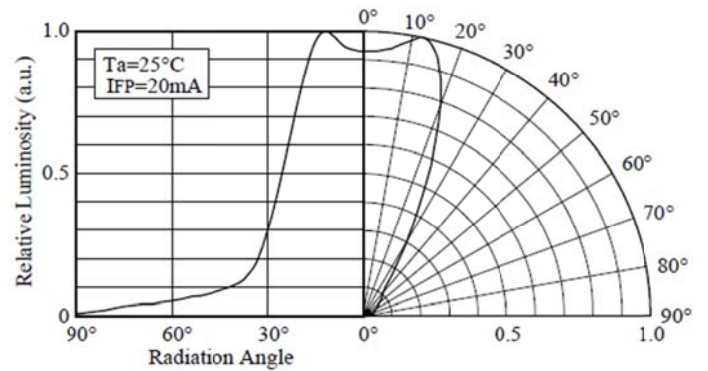

Soldering:

Dip Soldering		Soldering	
Pre-Heat	120°C Max.	Temperature	350°C Max.
Pre-Heat Time	60 seconds Max.	Soldering Time	3 seconds Max.
Solder Bath	260°C Max.	Position	No closer than 3 mm from the base of the epoxy bulb.
Temperature			
Dipping Time	10 seconds Max.		
Dipping Position	No lower than 3 mm from the base of the epoxy bulb.		