


10.56MM(REF)

1000±20MM

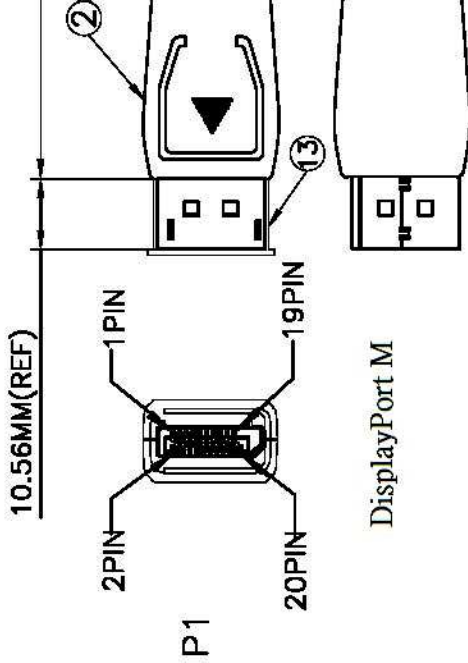


DisplayPort M

DVI Male

- ELECTRICAL TEST:**
- 1.100% OPEN & SHORT & MIS WIRE TEST
 - 2.CONTACT RESISTANCE:2 OHM(MAX)
 - 3.INSULATION RESISTANCE:10M OHM(MIN)
 - 4.HI-POT TEST:DC 300V/10ms

PIN ASSIGNMENT

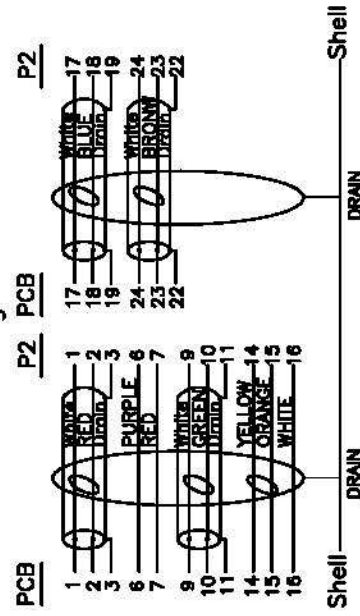

NO	DESCRIPTION	QTY	UNIT
13	DisplayPort M TRANSPARENT DUST COVER	1	pcs
12	DVI M TRANSPARENT DUST COVER	1	pcs
11	Display Port M ABS Up SHELL, COLOR:BLACK	1	pcs
10	Display Port M ABS Down SHELL, COLOR:BLACK	1	pcs
9	H.S.T:φ1.5*42mm	1	pcs
8	H.S.T:φ1.0*10mm	8	pcs
7	H.S.T:φ2.0*10mm	8	pcs
6	#4-40UNC 2.8*45MM NICKEL PLATED	2	pcs
5	45P PVC COLOR:BLACK	38	g
4	TRANSPARENT PE	5	g
3	DVI(24+1)M SOLDER TYPE, SHELL NICKEL, PIN GOLD	1	pcs
2	DISPLAY PORT M+PCB+SMT	1	set
1	UL 20276 (30AWG*1PR+EAM)*4+30AWG*1PR+30AWG*3C+AEB(AL16*7/0.12) OD:5.5mm Black	1	M

TOLERANCE	M/M	
	INCHES	M/M
.X	.015	.30
.XX	.010	.10
.XXX	.005	.05

DRAWN BY		Item No.		11.04.5613	
		SCALE	NONE	DRAWING NO.:	
CHECK BY		UNIT	MM	REV.:	A
APPD BY		DATE			1/1



ROLINE DisplayPort Cable, DP M / DVI M
1m, black color