




LTR.	REV	DESCRIPTION	DATE
	A	FIRST ISSUE	2010.11.6

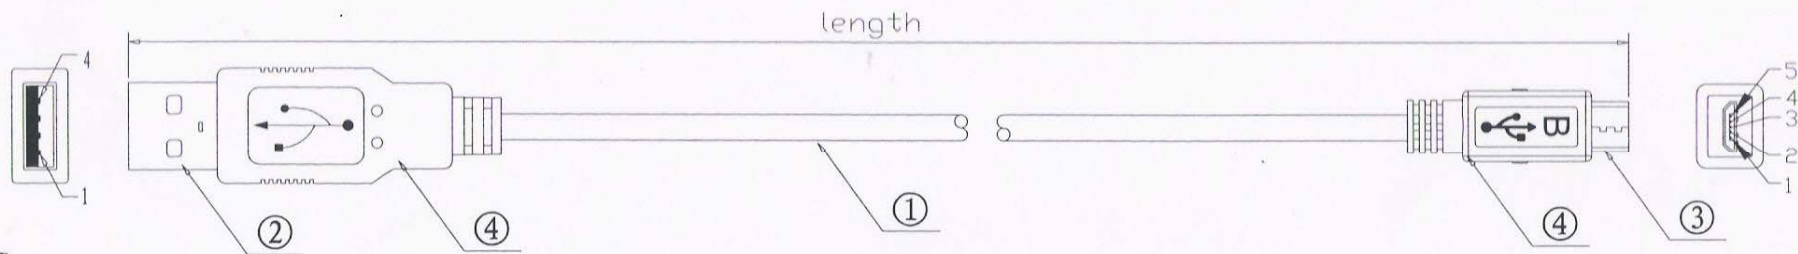


MARKING: Maxxtro AWM STYLE 2725 60° C 30V  
1P/28AWG AND 2C/28AWG USB 2.0



SECTION A-A



Pin Assignment

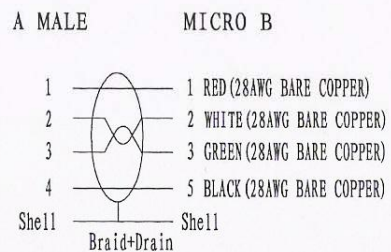

ITEM No.	LENGTH	PVC COLOR	PACKING
101293	3000 ± 50MM	BLACK 0020#	BLISTER



④	MOLDING	OUTER MOLD: 45P PVC	9	G
③	USB-MICRO B	USB MICRO B MALE CONNECTOR FLASH GOLD ;NICKEL PLATED SHELL	1	SET
②	USB-AM	USB AMALE CONNECTOR FLASH GOLD ;NICKEL PLATED SHELL	1	SET
①	CABLE	USB CABLE 28AWG/1P+28AWG/2C+AL+DRAIN+BRAID (48*0.12mm AL-MG) +PVC JACKET OD: 3.8 ± 0.2mm	L	M
NO	P/N	DESCRIPTION	QTY	UNIT

REMARK/NO	CHANO	SIGNATURE	DATE	SIGN	REV.	SCALE
		Jason				
DRAWN BY						
CHECKED BY						
AUDITED BY		APPROVED BY			A	
CRAFT		DATE	2010.11.6	PAGE	OF	

Maxxtro®

USB AM/BMICRO-XXX