




LTR	REV	DESCRIPTION	DATE
A		FIRST ISSUE	2011.6.16

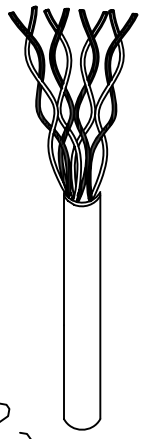


L ±3%

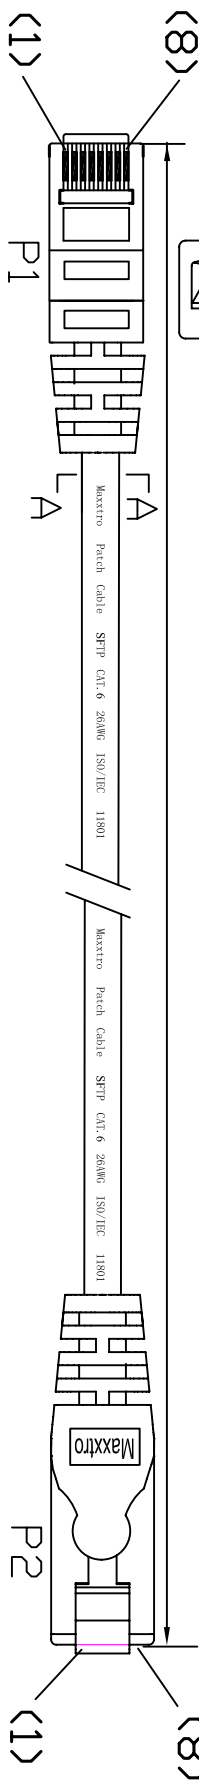


Connecting

P1	568B COLOR	P2
1	WH/DRG	1
2	DRG	2
3	WH/GRN	3
4	BLU	4
5	WH/BLU	5
6	GRN	6
7	WH/BWN	7
8	BWN	8



ITEM No.	LENGTH	PVC COLOR	PACKING
101852	7500 ± 150MM	BLACK 063#	ZB-L

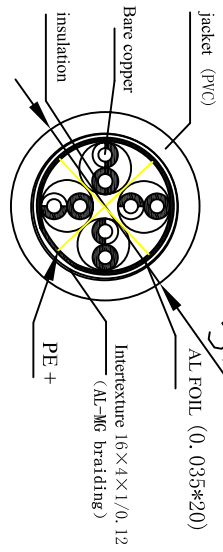

**SPECIFICATIONS:**

1. CONDUCTOR:
  - 1.1 CONDUCTORS: 26AWG 7\*0.155± 0.015mm
  - 1.2 CONDUCTOR INSULATION COLOR CODING: ONE WHITE/ORANGE, ONE ORANGE, ONE WHITE/GREEN, ONE GREEN, ONE BLUE, ONE WHITE/BLUE, ONE WHITE/BROWN, ONE BROWN.
2. CABLE JACKET
  - 2.1 PRINTING ON THE JACKET: Maxxtro Patch Cable SFTP CAT.6 26AWG ISO/IEC 11801
3. CABLE ASSEMBLY
  - 3.1 SEE SECTION A-A FOR DIMENSIONS
  - 3.2 CABLE TIE: Assorted upon request
  - 3.3 WIRING T568B COLOR
  - 3.4 CONTACT PLUG: RJ45 8P8CS 15u pc UL 94V-2
4. CABLE JACKET COLOR: GYEY 687#; RED 172#; BLUE 567#; YELLOW 361#; GREEN 273#; BLACK 063#; WHITE 461#; ORANGE 760#; PINK 171#; PURPLE 964#
5. LENGTH: L ± 3%

REMARK/NO		CHAN0	SIGNATURE	DATE	SIGN		REV.	SCALE	<b>Maxxtro®</b> SFTP CAT6 CABLE 26AWG
DRAWN BY		Mo'rgali							
CHECKED BY		宋巧							
AUDITED BY		黎传友	APPROVED BY	祁玉军			A		
CRAFT			DATE	2011.6.16	PAGE		OF		