



LTR.	REV.	DESCRIPTION	DATE
	A	FIRST ISSUE	2011. 3. 31

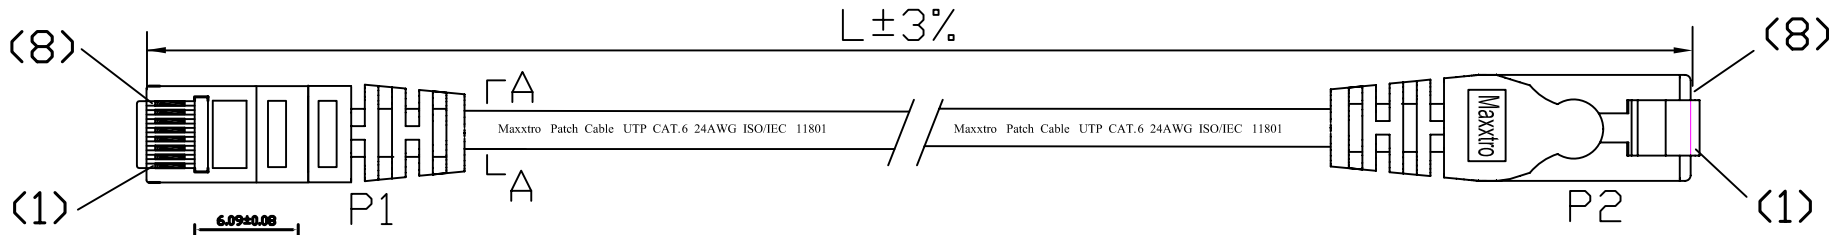


Connecting

P1	568B COLOR	P2
1	WH/ORG	1
2	ORG	2
3	WH/GRN	3
4	BLU	4
5	WH/BLU	5
6	GRN	6
7	WH/BWN	7
8	BWN	8



ITEM No.	LENGTH	PVC COLOR	PACKING
101905	300 ± 15MM	GREY 687#	ZB-M
101899	10000 ± 200MM	GREEN 273#	ZB-XL
101924	15000 ± 300MM	GREEN 273#	ZB-XL
101907	300 ± 15MM	YELLOW 361#	ZB-M
101930	20000 ± 400MM	RED 172#	ZB-XL

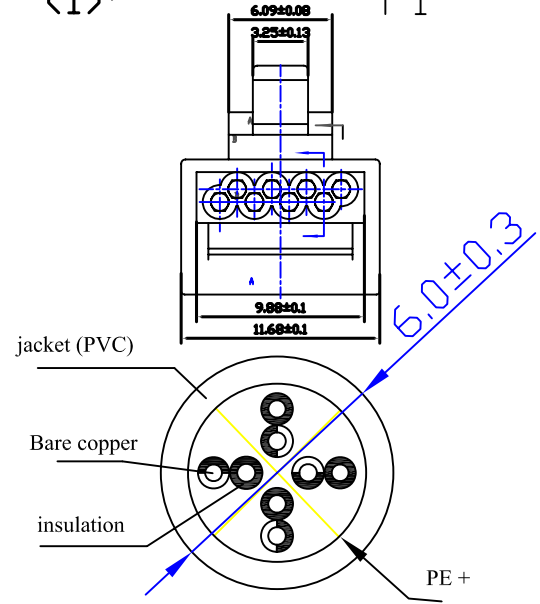

- SPECIFICATIONS:**
- CONDUCTOR:
 - CONDUCTORS: 24AWG 7*0.19±0.015mm
 - CONDUCTOR INSULATION COLOR CODING: ONE WHITE/ORANGE, ONE ORANGE, ONE WHITE/GREEN, ONE GREEN, ONE BLUE, ONE WHITE/BLUE, ONE WHITE/BROWN, ONE BROWN.
 - CABLE JACKET
 - PRINTING ON THE JACKET: Maxxtro Patch Cable UTP CAT.6 24AWG ISO/IEC 11801
 - CABLE ASSEMBLY
 - SEE SECTION A-A FOR DIMENSIONS
 - CABLE TIE: **Assorted upon request**
 - WIRING T568B COLOR
 - CONTACT PLUG: RJ45 8P8CS 15u pc UL 94V-2
 - CABLE JACKET COLOR: GYEY 687#; RED 172#; BLUE 567#; YELLOW 361#; GREEN 273#; BLACK 063#; WHITE 461#; ORANGE 760#; PINK 171#; PURPLE 964#
 - LENGTH: L±3%mm

				Maxxtro®		
REMARK/NO	CHA/NO	SIGNATURE	DATE	SIGN	REV.	SCALE
DRAWN BY	Morgan				A	
CHECKED BY						
AUDITED BY		APPROVED BY	Jason			
CRAFT		DATE	2011. 3. 31	PAGE OF		
				UTP CAT6 CABLE 24AWG		