

6

5

4




3

2

1


LTR.	REV.	DESCRIPTION	DATE
	A	FIRST ISSUE	2011.12.23

L±3%

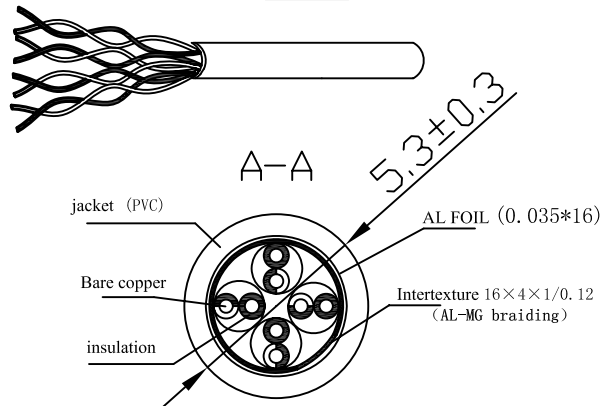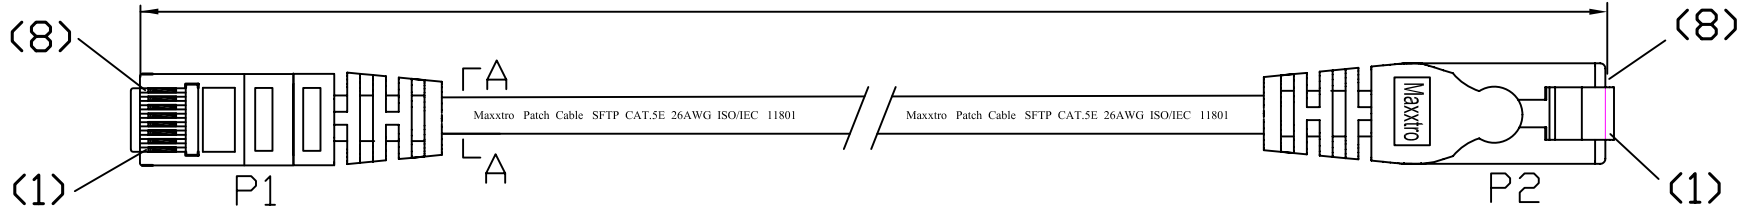

Connecting

P1	568B COLOR	P2
1	WH/ORG	1
2	ORG	2
3	WH/GRN	3
4	BLU	4
5	WH/BLU	5
6	GRN	6
7	WH/BWN	7
8	BWN	8



ITEM No.	LENGTH	PVC COLOR	PACKING
102133	20000 ± 400MM	RED 172#	ZB-XL

SPECIFICATIONS:

- 1. CONDUCTOR:
 - 1.1 CONDUCTORS: 26AWG 7*0.155±0.015mm
 - 1.2 CONDUCTOR INSULATION COLOR CODING: ONE WHITE/ORANGE, ONE ORANGE, ONE WHITE/GREEN, ONE GREEN, ONE BLUE, ONE WHITE/BLUE, ONE WHITE/BROWN, ONE BROWN.
- 2. CABLE JACKET
 - 2.1 PRINTING ON THE JACKET: Maxxtro Patch Cable SFTP CAT.5E 26AWG ISO/IEC 11801
- 3. CABLE ASSEMBLY
 - 3.1 SEE SECTION A-A FOR DIMENSIONS
 - 3.2 CABLE TIE: Assorted upon request
 - 3.3 WIRING T568B COLOR
 - 3.4 CONTACT PLUG: RJ45 8P8CS 15u pc UL 94V-2
- 4. CABLE JACKET COLOR: GY 687#; RED 172#; BLUE 567#; YELLOW 361#; GREEN 273#; BLACK 063#; WHITE 461#; ORANGE 760#; PINK 171#; PURPLE 964#
- 5. LENGTH: L±3%mm

REMARK	NO	CHA.NO	SIGNATURE	DATE	SIGN	REV.	SCALE
DRAWN BY		Morgan				A	
CHECKED BY		宋巧					
AUDITED BY		缪传友	APPROVED BY	祁玉军			
CRAFT			DATE	2011.12.23	PAGE OF		

Maxxtro®

SFTP CAT5e CABLE 26AWG

6

5

4

3

2

1