

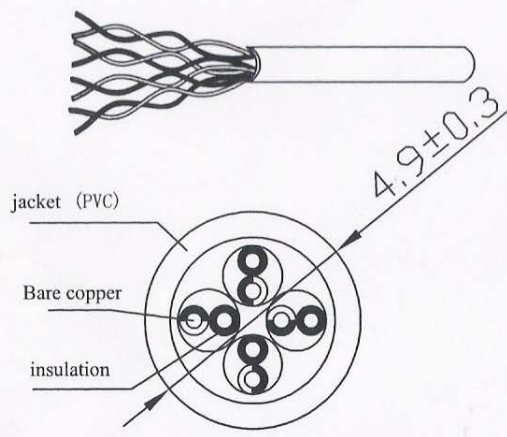


LTR.	REV.	DESCRIPTION	DATE
	A	FIRST ISSUE	2010.11.13

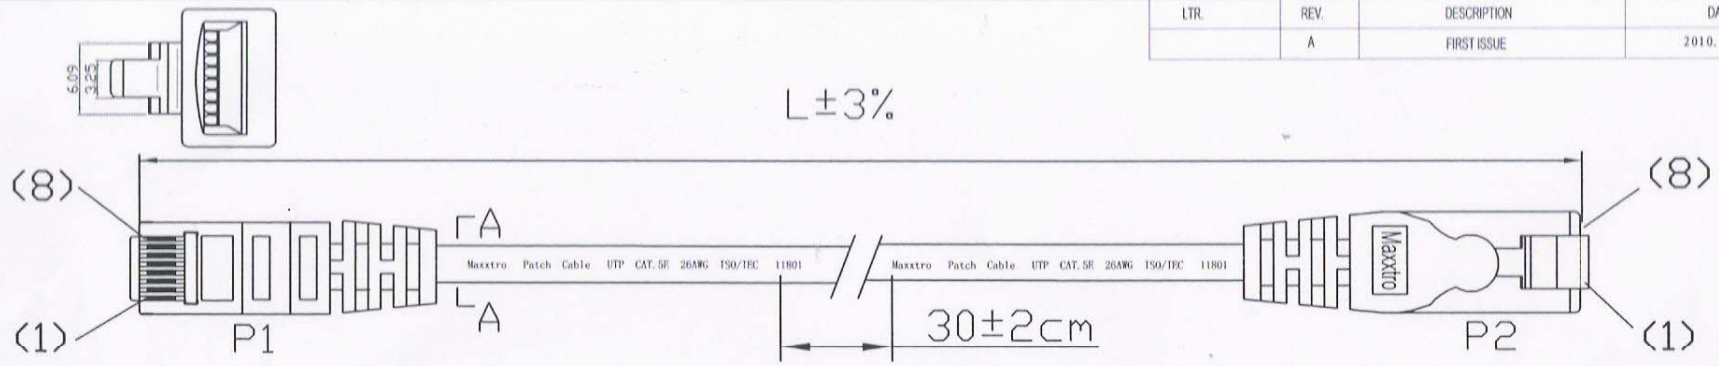

Connecting

P1	568B COLOR	P2
1	WH/ORG	1
2	ORG	2
3	WH/GRN	3
4	BLU	4
5	WH/BLU	5
6	GRN	6
7	WH/BWN	7
8	BWN	8



ITEM No.	LENGTH	PVC COLOR	PACKING
102205	600 ± 20MM	GREY 687#	ZB-M
102200	1000 ± 20MM	GREY 687#	ZB-M
102202	1000 ± 20MM	YELLOW 361#	ZB-M
102210	2000 ± 40MM	GREY 687#	ZB-M
102211	2000 ± 40MM	BLUE 567#	ZB-M
102212	2000 ± 40MM	YELLOW 361#	ZB-M
102213	2000 ± 40MM	GREEN 273#	ZB-M
102220	3000 ± 60MM	GREY 687#	ZB-L
102221	3000 ± 60MM	BLUE 567#	ZB-L
102223	3000 ± 60MM	GREEN 273#	ZB-L
102250	10000 ± 200MM	GREY 687#	ZB-XL
102253	10000 ± 200MM	GREEN 273#	ZB-XL
102270	20000 ± 400MM	GREY 687#	ZB-XL
102273	20000 ± 400MM	GREEN 273#	ZB-XL

**SPECIFICATIONS:**

1. CONDUCTOR:
  - 1.1 CONDUCTORS: 26AWG 7\*0.155±0.015mm
  - 1.2 CONDUCTOR INSULATION COLOR CODING: ONE WHITE/ORANGE, ONE ORANGE, ONE WHITE/GREEN, ONE GREEN, ONE BLUE, ONE WHITE/BLUE, ONE WHITE/BROWN, ONE BROWN.
2. CABLE JACKET
  - 2.1 PRINTING ON THE JACKET: Maxxtro Patch Cable UTP CAT.5E 26AWG ISO/IEC 11801
3. CABLE ASSEMBLY
  - 3.1 SEE SECTION A-A FOR DIMENSIONS
  - 3.2 CABLE TIE: Assorted upon request
  - 3.3 WIRING T568B COLOR
  - 3.4 CONTACT PLUG: RJ45 8P8C 15u pc UL 94V-2
4. CABLE JACKET COLOR: GY 687#; RED 172#; BLUE 567#; YELLOW 361#; GREEN 273#; BLACK 063#; WHITE 461#; ORANGE 760#; PINK 171#; PURPLE 964#
5. LENGTH: L±3%mm

REMARK NO	CHA NO	SIGNATURE	DATE	SIGN	REV.	SCALE
		Morgan			A	
DRAWN BY	CHECKED BY	AUDITED BY	APPROVED BY	PAGE OF		
				3302250005		
CRAFT	DATE	2010.11.13		Maxxtro® UTP CAT5e CABLE 26AWG		

