


MATERIAL LIST:

NO.	PARTS NAME	SPECIFICATION DESCRIPTION
①	CABLE	UL20276 [(28AWG+S+PVC)*3C+(28AWG+D+AL+MYLAR)*7P+28AWG*1P+28AWG*5C]+AL+D+B (60%) OD:10.0mm COLOR:BLACK
②	DVI CONNECTOR	DVI 24+5 MALE INSULATOR BLACK SOLDER TYPE PIN GOLD PLATED 1u" GOLD PLATED SHELL
③	SCREW	Ø4*47mm NICKEL PLATED
④	MOLDING PVC	MOLDING PVC 063 45P COLOR:BLACK
⑤	MOLDING PVC	MOLDING PVC 063 30P COLOR:BLACK


Marking: Maxxtro C AWM E200765 STYLE 20276 80°C 30V FT2

ITEM NO	LENGTH	PVC COLOR	PACKING
102375	1800±50mm	BLACK 0020	ZB-L

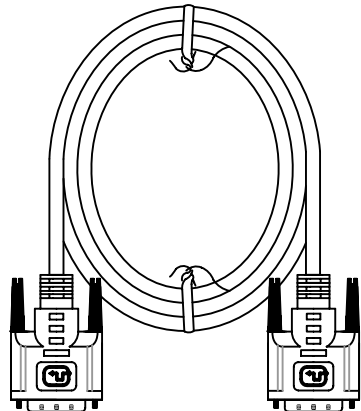

ELECTRONIC TEST:

- A.OPEN/SHORT/INTERMITTENCE: 100%.
- B.HI-POT: 300V DC/sec
- C.INSULATION RESISTANCE: 10M ohm (MIN)
- D.CONDUCTIVE RESISTANCE: 5ohm (MAX)

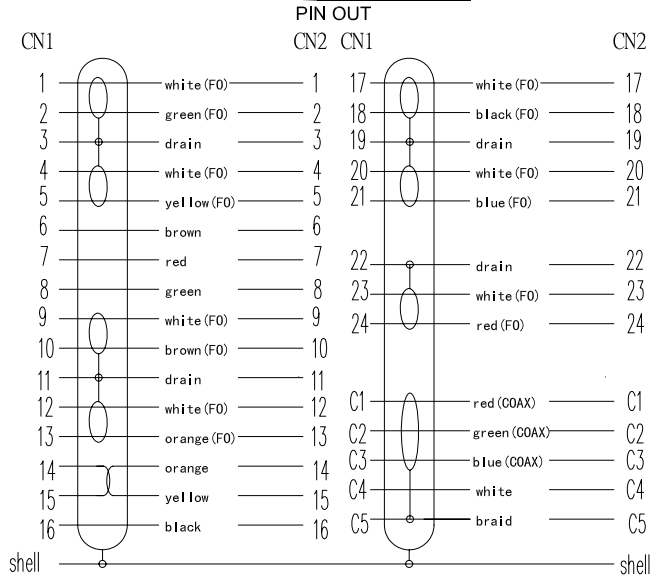

REMARK	NO	CHA.NO	SIGNATURE	DATE	<div style="text-align: center; font-weight: bold; font-size: 1.2em;">Maxxtro®</div>			
DRAWN BY		Renzhi				SIGN	REV.	SCALE
CHECKED BY							A	
AUDITED BY			APPROVED BY					
CRAFT			DATE	2011.08.23		PAGE	OF	