


# Phototransistor

## S2829

### Subminiature package phototransistor

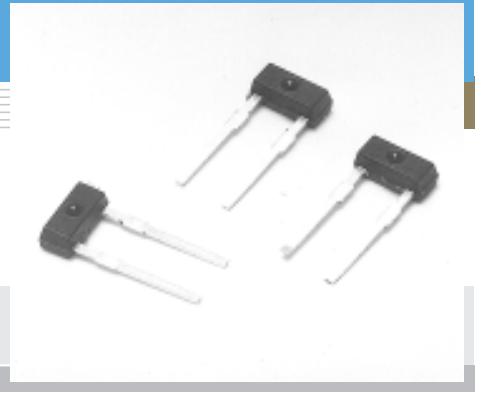

S2829 is a high sensitivity phototransistor molded into a visible-cut plastic package.

#### Features

- Subminiature plastic package with lens
- Visible-cut package
- High sensitivity: 1.0 mA (1000 lx)

#### Applications

- Tape start/end mark sensor for VTRs, cassette tape recorders, etc.
- Rotary encoders
- Touch screen

#### Absolute maximum ratings (Ta=25 °C)


Parameter	Symbol	Value	Unit
Collector-emitter voltage	V <sub>CEO</sub>	35	V
Emitter-collector voltage	V <sub>ECO</sub>	4	V
Collector current	I <sub>c</sub>	20	mA
Collector dissipation	P <sub>c</sub>	80	mW
Operating temperature	T <sub>opr</sub>	-25 to +85	°C
Storage temperature	T <sub>stg</sub>	-40 to +100	°C
Soldering	-	260 °C, 3 s, at least 2.5 mm away from package surface	-

#### Electrical and optical characteristics (Ta=25 °C)

Parameter	Symbol	Condition	Min.	Typ.	Max.	Unit
Photocurrent *	I <sub>c</sub>	V <sub>CE</sub> =5 V, 1000 lx	0.3	1.0	-	mA
Dark current	I <sub>CEO</sub>	V <sub>CE</sub> =20 V, 0 lx	-	-	100	nA
Collector-emitter saturation voltage	V <sub>CE (sat)</sub>	I <sub>c</sub> =0.3 mA, 1000 lx	-	-	0.4	V
Peak sensitivity wavelength	λ <sub>p</sub>		-	850	-	nm
Rise time	t <sub>r</sub>	V <sub>CC</sub> =5 V, I <sub>c</sub> =1 mA	-	2	-	μs
Fall time	t <sub>f</sub>	R <sub>L</sub> =100 Ω	-	3	-	μs

\* Measured with a CIE standard "A" light source at 2856 K


#### Response time measurement circuit

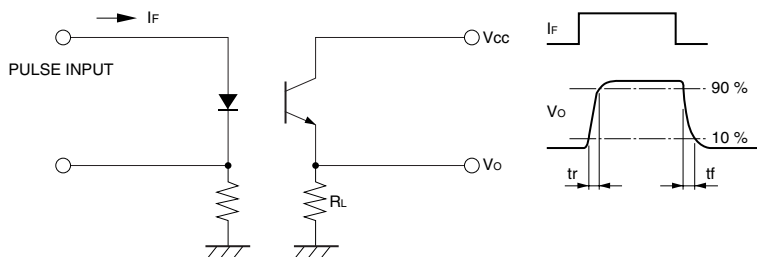


KPTRC0001EA

**SOLID STATE DIVISION**


## ■ Spectral response

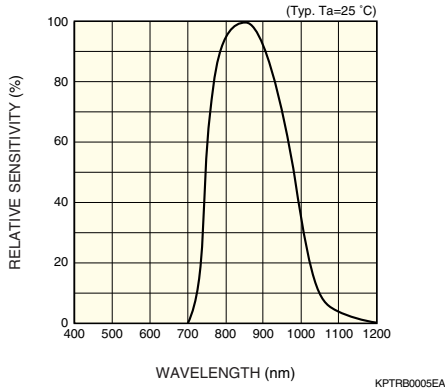


## ■ Collector power dissipation vs. ambient temperature

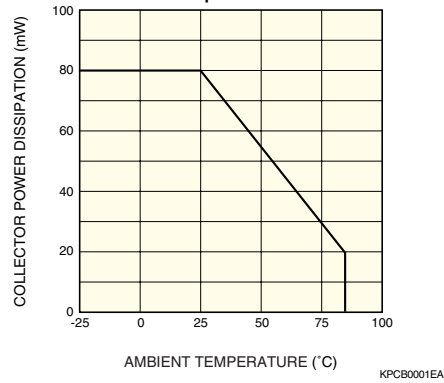


## ■ Photocurrent vs. ambient temperature

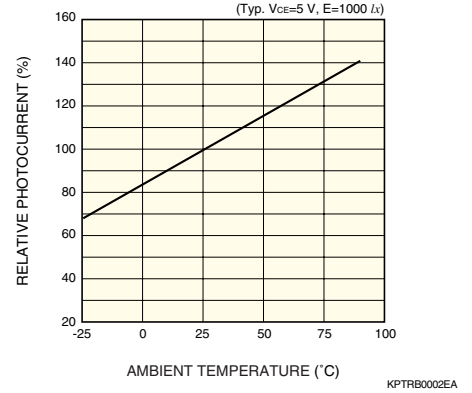

## ■ Dark current vs. ambient temperature

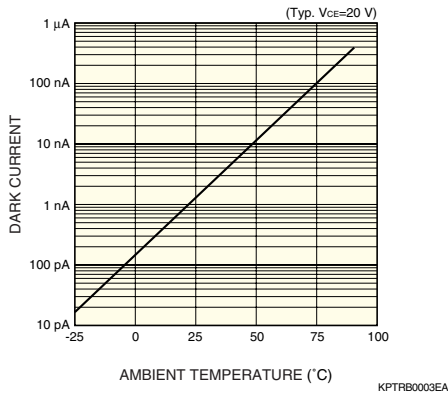

## ■ Dimensional outline (unit: mm)

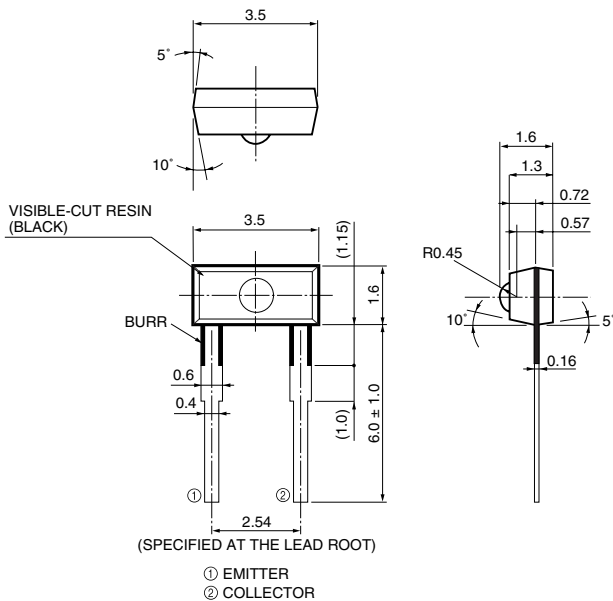

Tolerance unless otherwise noted:  $\pm 0.2$ ,  $\pm 2^\circ$   
 Shaded area indicates burr.  
 Values in parentheses are not guaranteed, but for reference.

KPTRA0001EA

# HAMAMATSU

Information furnished by HAMAMATSU is believed to be reliable. However, no responsibility is assumed for possible inaccuracies or omissions. Specifications are subject to change without notice. No patent rights are granted to any of the circuits described herein. ©2001 Hamamatsu Photonics K.K.

HAMAMATSU PHOTONICS K.K., Solid State Division

1126-1 Ichino-cho, Hamamatsu City, 435-8558 Japan, Telephone: (81) 053-434-3311, Fax: (81) 053-434-5184, <http://www.hamamatsu.com>

U.S.A.: Hamamatsu Corporation: 360 Foothill Road, P.O.Box 6910, Bridgewater, N.J. 08807-0910, U.S.A., Telephone: (1) 908-231-0960, Fax: (1) 908-231-1218

Germany: Hamamatsu Photonics Deutschland GmbH: Arzbergerstr. 10, D-82211 Herrsching am Ammersee, Germany, Telephone: (49) 08152-3750, Fax: (49) 08152-2658

France: Hamamatsu Photonics France S.A.R.L.: 8, Rue du Saule Trapu, Parc du Moulin de Massy, 91882 Massy Cedex, France, Telephone: 33-(1) 69 53 71 00, Fax: 33-(1) 69 53 71 10

United Kingdom: Hamamatsu Photonics UK Limited: 2 Howard Court, 10 Twin Road, Welwyn Garden City, Hertfordshire AL7 1BW, United Kingdom, Telephone: (44) 1707-294888, Fax: (44) 1707-325777

North Europe: Hamamatsu Photonics Norden AB: Smidevågen 12, SE-171 41 Solna, Sweden, Telephone: (46) 8-509-031-00, Fax: (46) 8-509-031-01

Italy: Hamamatsu Photonics Italia S.R.L.: Strada della Moia, 1/E, 20020 Arese, (Milano), Italy, Telephone: (39) 02-935-81-733, Fax: (39) 02-935-81-741