

Interface module; for flat cable connectors per DIN 41651; 40-pole

Item No.: 289-617



Interface module; for flat cable connectors per DIN 41651; 40-pole

Marking

RoHS ✓
Compliant

Business data

Supplier	WAGO
Item no.	289-617
GTIN / EAN	4045454353612
Content	1
Order amount	1
Customer item number	

Notes


Technical data

Miscellaneous

No. of poles	40
Pollution degree (1)	2
Rated voltage EN (1) [V]	125 [V]
Rated surge voltage (1) [kV]	0.8 [kV]
Wire connection 1	WAGO 737 Series
Operating voltage	125 V AC / DC
Nominal current [A]	1 [A]
Ambient operating temperature	-20 °C ... +55 °C
Connector contact	Au over Ni
Performance level	3 / 50 mating cycles

Technical data	
<i>Mounting direction</i>	<i>vertical</i>
<i>Connection technology (1)</i>	<i>CAGE CLAMP®</i>
<i>Solid sizes 1</i>	<i>0.08 ... 2.5 mm² / 28 ... 12 AWG</i>
<i>Strip length 1</i>	<i>5 ... 6 mm / 0.2 ... 0.24 in</i>
<i>Fire load [MJ]</i>	<i>1.775 [MJ]</i>
<i>Weight [g]</i>	<i>114 [g]</i>
<i>Width</i>	<i>74 mm / 2.913 in</i>
<i>Height from upper-edge of DIN-rail [mm]</i>	<i>62 [mm]</i>
<i>Height from upper-edge of DIN-rail</i>	<i>62 mm / 2.441 in</i>
<i>Length</i>	<i>85 mm / 3.346 in</i>
<i>Storage temperature</i>	<i>-40 °C ... +70 °C</i>
<i>Standards/specifications</i>	<i>IEC 60603-1 / DIN 41651 Part 1 and 2</i>
<i>Type of mounting</i>	<i>DIN 35 rail</i>

Images & drawings

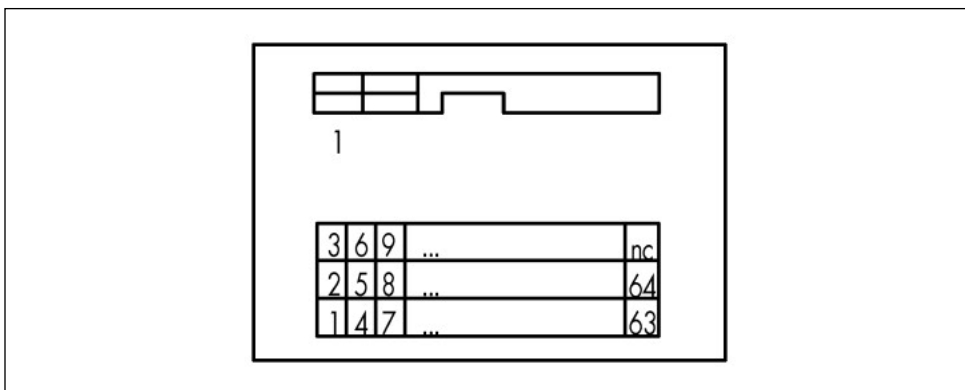

Address

WAGO Kontakttechnik GmbH & Co. KG

Hansastr. 27

32423 Minden

Telefon: 0571/887-0

Fax: 0571/887-169

<http://www.wago.com>

© WAGO Kontakttechnik GmbH & Co. KG

Technische Änderungen und Irrtümer vorbehalten.