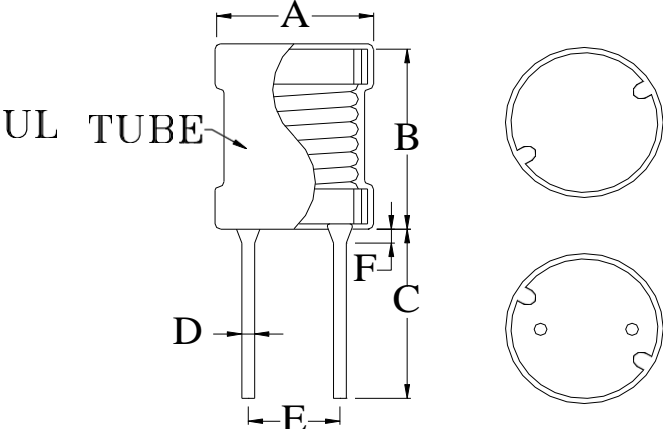


# SPECIFICATION FOR APPROVAL

COMMODITY	PK CHOKE		SPEC NO.	SP-060831030
ITEM	COIL1016-0.047	Green	B	QRRD-01-02

(1) DIMENSION: (UNIT: mm)		DIM.	TOL.
 <p>UL TUBE</p>	A	11.5	MAX.
	B	17.5	MAX.
	C	16.0	±3.0
	D	0.8	±0.1
	E	6.0	±0.5
	F	3.0	MAX.
	G		
	H		
	I		
	J		

(2) ELECTRICAL CHARACTERISTIC			TEST INSTRUMENTS.
INDUCTANCE	47 ± 10%	μH	<input checked="" type="checkbox"/> AGILENT 4294A Precision Impedance Analyzer. <input type="checkbox"/> AGILENT 4285A Precision L.C.R. Meter. <input type="checkbox"/> HP-4286A RF L.C.R. Meter.
TEST FREQUENCY	1	kHz	<input type="checkbox"/> ZENITECH 3302 Automatic Components Analyzer. <input type="checkbox"/> ZENITECH 101 L.C.R. Meter.
TEST VOLT	0.25	V	<input type="checkbox"/> WAYNE KERR 6420 Precision Impedance Analyzer. <input checked="" type="checkbox"/> ZENITECH 1320 BIAS CURRENT.
RDC	60 (max)	Ω	<input checked="" type="checkbox"/> ZENITECH 502AC Resistance Meter. <input type="checkbox"/> ADEX AX-1155B DC Low Ohm Meter.
Isat	4.6 (max)	A	
Irms	4.0 (max)	A	

**REMARK :**

1. Inductance drop = 10% typ at Isat.
2. ΔT = 40°C rise typ at Irms.

# SPECIFICATION FOR APPROVAL

COMMODITY	PK CHOKE		SPEC NO.	SP-060831030
ITEM	COIL1016-0.047	Green	B	QRRD-01-02
<b>(3) Material List</b>				
NO	ITEM	MATERIAL	NOTE	
1	CORE	C5N DR2W 10*16(SW)(B6 F10.5 P6)TC0816Or other's equivalent		
2	WIRE	2UEW 130°C CLASS 0.6/35Ts		
3	SOLDER	Sn 99.3 % / Cu 0.7%		
4	TUBE	UL 10*18		