


### 5N Type 2R Light Touch Switches

Type: **EVQ2**



#### ■ Features


- Wealth of product types: With or without a ground terminal, vertical type, snap-in terminals, etc.
- Can be automatically dip-soldered: Integral molding of the terminals and main body prevents the escape of flux.

**!** To Be Discontinued  
Last time buy: December 31, 2020


#### ■ Recommended Applications

- Operating switches for electronic equipment

#### ■ Explanation of Part Numbers

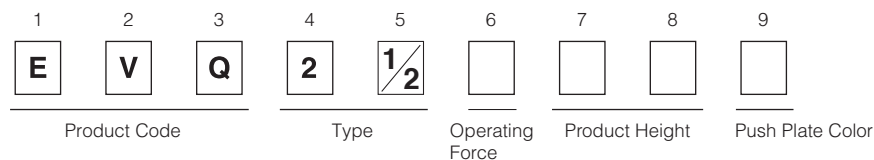

#### ■ Specifications

Type	Snap action/Push-on type SPST	
Electrical	Circuit Diagram	
	Rating	10 μA 2 V DC to 20 mA 15 V DC (Resistive load)
	Contact Resistance	50 mΩ max.
	Insulation Resistance	50 MΩ min. (at 100 V DC)
	Dielectric Withstanding Voltage	250 V AC for 1 minute
Mechanical	Bouncing	3 ms max. (ON) 8 ms max. (OFF)
	Operating Force	1.0 N±0.4 N 1.3 N±0.4 N 1.6 N±0.5 N
	Travel	0.25 mm±0.10 mm
Endurance	Operating Life	100,000 cycles min.*      50,000 cycles min.
Operating Temperature		-20 °C to +70 °C
Storage Temperature		-40 °C to +85 °C (Bulk) -20 °C to +40 °C (Taping)
Minimum Quantity/Packing Unit		1,000 pcs. Radial Taping (Reel Pack)
Quantity/Cartron		10,000 pcs.

\*1 million cycles also available, consult our salesmen.

Design and specifications are each subject to change without notice. Ask factory for the current technical specifications before purchase and/or use. Should a safety concern arise regarding this product, please be sure to contact us immediately.

### ■ Dimensions in mm (not to scale)

#### EVQ2




With ground terminal

2-terminals type

Without ground terminal

General dimension tolerance :  $\pm 0.2$   
( ) dimensions are reference dimensions.

**! To Be Discontinued**  
**Last time buy: December 31, 2020**

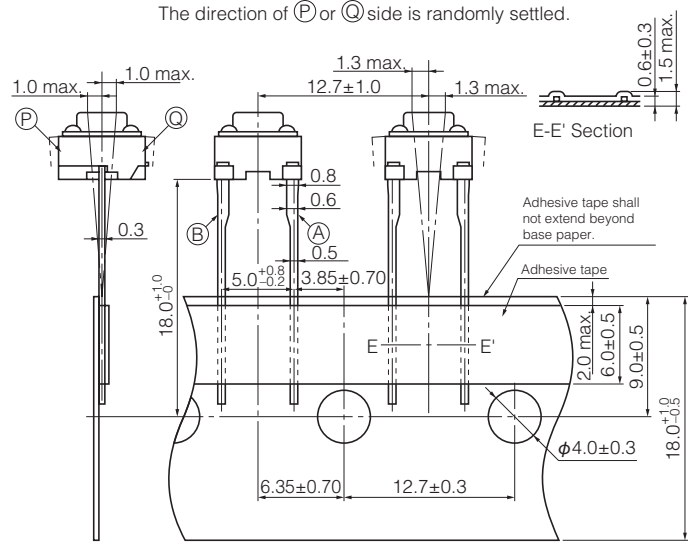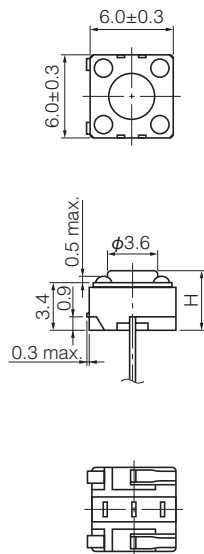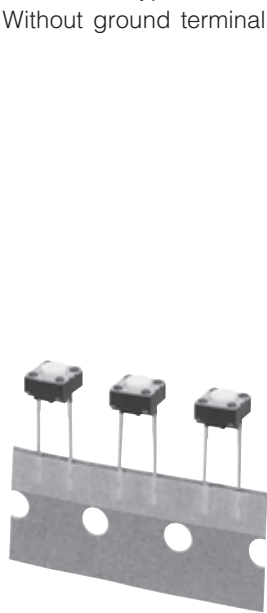



The direction of (P) or (Q) side is randomly settled.

E-E' Section

Adhesive tape shall not extend beyond base paper.

Adhesive tape

JIS C0806-2 shall be applied to the items not specified here.



Part Numbers	Operating Force	H=Height	Push Plate Color	Operating Life
EVQ21304M	1.0 N	4.3 mm	White	100,000 cycles
EVQ21305R	1.0 N	5.0 mm	Red	100,000 cycles
EVQ21307K	1.0 N	7.0 mm	Black	100,000 cycles
EVQ21309K	1.0 N	9.5 mm	Black	100,000 cycles
EVQ21404M	1.3 N	4.3 mm	White	100,000 cycles
EVQ21405R	1.3 N	5.0 mm	Red	100,000 cycles
EVQ21407K	1.3 N	7.0 mm	Black	100,000 cycles
EVQ21409K	1.3 N	9.5 mm	Black	100,000 cycles
EVQ21504M	1.6 N	4.3 mm	White	100,000 cycles
EVQ21505R	1.6 N	5.0 mm	Red	100,000 cycles
EVQ21507K	1.6 N	7.0 mm	Black	100,000 cycles
EVQ21509K	1.6 N	9.5 mm	Black	100,000 cycles
EVQ22704M	2.6 N	4.3 mm	White	50,000 cycles
EVQ22705R	2.6 N	5.0 mm	Red	50,000 cycles
EVQ22707K	2.6 N	7.0 mm	Black	50,000 cycles
EVQ22709K	2.6 N	9.5 mm	Black	50,000 cycles

Design and specifications are each subject to change without notice. Ask factory for the current technical specifications before purchase and/or use.  
Should a safety concern arise regarding this product, please be sure to contact us immediately.