


Transformers

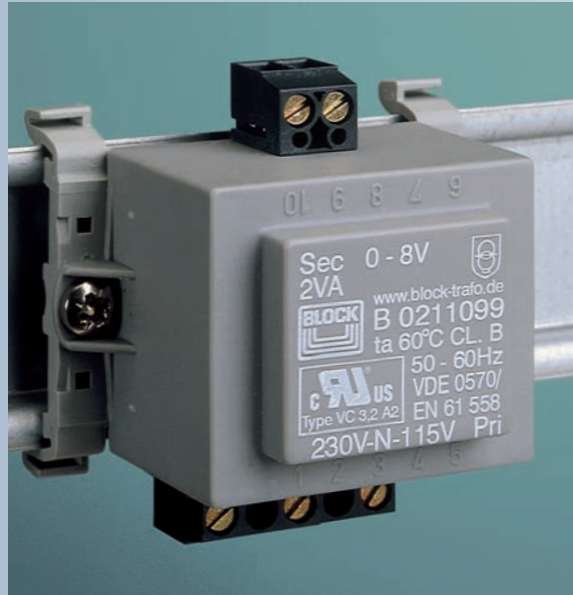

Type		FGT 300	FGT 301	FGT 314	FGT 315
For use with DC supplied fans of the following voltages:*	[V]	12	12	24	24
Primary Voltage	[VAC]	115/230	115/230	115/230	115/230
Supply Frequency	[Hz]	50 - 60	50 - 60	50 - 60	50 - 60
Secondary Voltage	[VAC]	8	8	18	18
Maximum Operating Temperature	[°C]	60	60	60	60
Power Rating	[VA]	2	2	2	2
Protection Class		II	II	II	II
Dimensions	WxLxH [mm]	53x56x36**	53x56x31	53x56x36**	53x56x31
Mounting hole diameter	[mm]	3	3	3	3
Weight	[gms]	165	165	165	165
Supplied with DIN Rail mounting clips		Y	N	Y	N

* In combination with Smartcon-Wire (with integrated rectifier)
 ** Where DIN Rail mounts are fitted, height measured from rail

Features

- Dual primary voltage connections
- Compact
- Ready for fitting
- Screw terminal connection
- UL recognised components

Optional

- 35mm DIN Rail mounting clips and screws (EN 50022)



DBK David+Baader GmbH

Components

Rheinstrasse 72 - 74
 D - 76870 Kandel

Phone: + 49 (0) 72 75 7 03 - 231
 Fax: + 49 (0) 72 75 7 03 - 249

info@dbk-group.de
 www.dbk-components.com