

- Rugged, compact metal case
- Screw terminal adaptor available for easy connection
- Wide 2:1 input voltage range
- Full load operation up to 60°C with convection cooling
- Soft start
- Under voltage lock-out circuit
- Reverse input voltage protection
- Input protection filter
- 3-year product warranty



The TEP 100 Series is a family of isolated high performance DC/DC converter modules with ultra-wide 2:1 input voltage ranges which come in a rugged, sealed metal case. These converters are suitable for a wide range of applications. For easy connection there is also a unique adaptor available with screw terminals. A very high efficiency allows an operating temperature up to +60°C with natural convection cooling without power derating. Further features include output voltage trimming, Remote On/Off and under voltage lockout. The very wide input voltage range and reverse input voltage protection make these converters also an interesting solution for battery operated systems.

Models				
Order Code	Input Voltage Range	Output Voltage nom.	Output Current max.	Efficiency typ.
TEP 100-1210	9 - 18 VDC (12 VDC nom.)	3.3 VDC	25'000 mA	90 %
TEP 100-1211		5 VDC	20'000 mA	91 %
TEP 100-1212		12 VDC	8'400 mA	91 %
TEP 100-1213		15 VDC	6'700 mA	91 %
TEP 100-1215		24 VDC	4'200 mA	90 %
TEP 100-1216		28 VDC	3'600 mA	90 %
TEP 100-1218		48 VDC	2'100 mA	90 %
TEP 100-2410	18 - 36 VDC (24 VDC nom.)	3.3 VDC	25'000 mA	91 %
TEP 100-2411		5 VDC	20'000 mA	93 %
TEP 100-2412		12 VDC	8'400 mA	93 %
TEP 100-2413		15 VDC	6'700 mA	93 %
TEP 100-2415		24 VDC	4'200 mA	92 %
TEP 100-2416		28 VDC	3'600 mA	92 %
TEP 100-2418		48 VDC	2'100 mA	92 %
TEP 100-4810	36 - 75 VDC (48 VDC nom.)	3.3 VDC	25'000 mA	91 %
TEP 100-4811		5 VDC	20'000 mA	93 %
TEP 100-4812		12 VDC	8'400 mA	93 %
TEP 100-4813		15 VDC	6'700 mA	93 %
TEP 100-4815		24 VDC	4'200 mA	92 %
TEP 100-4816		28 VDC	3'600 mA	92 %
TEP 100-4818		48 VDC	2'100 mA	92 %

Options	
Suffix -CM	- Chassis mount models without filter: www.tracopower.com/products/tep100cm.pdf
Suffix -CMF	- Chassis mount models with filter to meet EN 55032 class A: www.tracopower.com/products/tep100cmf.pdf
TEP-HS1	- Heat-sink for standard version (incl. thermal pad and mounting screws)
on demand (backorder with MOQ non stocking item)	- Inverse Remote On/Off function (passive = off)

Input Specifications		
Input Current	- At no load	12 Vin models: 130 mA typ. 24 Vin models: 120 mA typ. 48 Vin models: 70 mA typ.
	- At full load	12 Vin models: 9'400 mA max. 24 Vin models: 4'600 mA max. 48 Vin models: 2'300 mA max.
Surge Voltage		12 Vin models: 36 VDC max. (1 s max.) 24 Vin models: 50 VDC max. (1 s max.) 48 Vin models: 100 VDC max. (1 s max.)
Under Voltage Lockout		12 Vin models: 7.5 VDC typ. 24 Vin models: 16 VDC typ. 48 Vin models: 34 VDC typ.
Recommended Input Fuse		12 Vin models: 20'000 mA (fast acting) 24 Vin models: 10'000 mA (fast acting) 48 Vin models: 5'000 mA (slow blow) (The need of an external fuse has to be assessed in the final application.)
Reverse Voltage Protection		Parallel diode (external input fuse required)
Input Filter		Internal Pi-Type

Output Specifications		
Output Voltage Adjustment		-20% to +10% (By external trim resistor) See application note: www.tracopower.com/overview/tep100 Output power must not exceed rated power!
Voltage Set Accuracy		±1% max.
Regulation	- Input Variation (Vmin - Vmax) - Load Variation (0 - 100%)	0.1% max. 0.1% max.
Ripple and Noise (20 MHz Bandwidth)		3.3 Vout models: 75 mVp-p max. (with 4.7 µF X7R) 5 Vout models: 75 mVp-p max. (with 4.7 µF X7R) 12 Vout models: 100 mVp-p max. (with 4.7 µF X7R) 15 Vout models: 100 mVp-p max. (with 4.7 µF X7R) 24 Vout models: 200 mVp-p max. (with 4.7 µF X7R) 28 Vout models: 200 mVp-p max. (with 4.7 µF X7R) 48 Vout models: 300 mVp-p max. (with 2.2 µF X7R)
Capacitive Load		3.3 Vout models: 75'700 µF max. 5 Vout models: 40'000 µF max. 12 Vout models: 7'000 µF max. 15 Vout models: 4'460 µF max. 24 Vout models: 1'750 µF max. 28 Vout models: 1'280 µF max. 48 Vout models: 430 µF max.
Minimum Load		Not required
Temperature Coefficient		±0.02 %/K max.
Start-up Time		25 ms typ.
Short Circuit Protection		Continuous, Automatic recovery
Output Current Limitation		110 - 140% of Iout max.

All specifications valid at nominal voltage, full load and +25°C after warm-up time unless otherwise stated.

Overvoltage Protection	115 - 130% of Vout nom.
Transient Response	- Response Time 200 µs typ. / 250 µs max. (25% Load Step)

Safety Specifications

Safety Standards	- IT / Multimedia Equipment	IEC 60950-1 EN 60950-1 UL 60950-1
	- Certification Documents	www.tracopower.com/overview/tep100

EMC Specifications

EMI Emissions	- Conducted Emissions	EN 55011 class B (with external filter) EN 55032 class B (with external filter)
	- Radiated Emissions	EN 55011 class B (with external filter) EN 55032 class B (with external filter)
	External filter proposal:	www.tracopower.com/overview/tep100
EMS Immunity	- Electrostatic Discharge	EN 55024 (IT Equipment) Air: EN 61000-4-2, ±8 kV, perf. criteria A Contact: EN 61000-4-2, ±6 kV, perf. criteria A
	- RF Electromagnetic Field	EN 61000-4-3, 10 V/m, perf. criteria A
	- EFT (Burst) / Surge	EN 61000-4-4, ±2 kV, perf. criteria A EN 61000-4-5, ±2 kV, perf. criteria A
	- Conducted RF Disturbances	Ext. input component: 2 x KY 220 µF EN 61000-4-6, 10 Vrms, perf. criteria A
	- PF Magnetic Field	Continuous: EN 61000-4-8, 100 A/m, perf. criteria A 1 s: EN 61000-4-8, 1000 A/m, perf. criteria A

General Specifications

Relative Humidity	95% max. (non condensing)	
Temperature Ranges	- Operating Temperature - Case Temperature - Storage Temperature	-40°C to +75°C +105°C max. -55°C to +125°C
Power Derating	- High Temperature	See application note: www.tracopower.com/overview/tep100
Over Temperature Protection Switch Off	- Protection Mode - Measurement Point	115°C typ. (Automatic recovery at 105°C) See Application-Note
Cooling System	Natural convection (20 LFM)	
Sense Function	10% max. of Vout nom.	
Remote Control	- Voltage Controlled Remote - Off Idle Input Current - Remote Pin Input Current	On: 3.0 to 12 VDC or open circuit Off: 0 to 1.2 VDC or short circuit Refers to 'Remote' and '-Vin' Pin 3 mA typ. -0.5 to 1.0 mA (Optional models with inverse logic available)
Altitude During Operation	2'000 m max.	
Switching Frequency	270 - 330 kHz (PWM) 300 kHz typ. (PWM)	
Insulation System	Basic Insulation	
Isolation Test Voltage	- Input to Output, 60 s - Input to Case, 60 s	1'591 VAC 1'131 VAC
Isolation Resistance	- Input to Output, 500 VDC	1'000 MΩ min.
Isolation Capacitance	- Input to Output, 100 kHz, 1 V	2'500 pF max.
Reliability	- Calculated MTBF	331'000 h (MIL-HDBK-217F, ground benign)
Environment	- Vibration - Thermal Shock	MIL-STD-810F MIL-STD-810F
Housing Material	Metal	
Base Material	Non-conductive FR4 (UL94 V-0 rated)	

All specifications valid at nominal voltage, full load and +25°C after warm-up time unless otherwise stated.


Potting Material	Silicone (UL 94 V-0 rated)
Pin Material	Copper
Pin Foundation Plating	Nickel (2 - 3 μm)
Pin Surface Plating	Tin (3 - 5 μm), matte
Connection Type	THD (Through-Hole Device)
Weight	97 g
Thermal Impedance	6.7 K/W
	- with Heat Sink
	4.7 K/W
Environmental Compliance	- Reach
	- RoHS
	www.tracopower.com/info/reach-declaration.pdf
	www.tracopower.com/info/rohs-declaration.pdf

Supporting Documents

Overview Link (for additional Documents)

www.tracopower.com/overview/tep100

Outline Dimensions

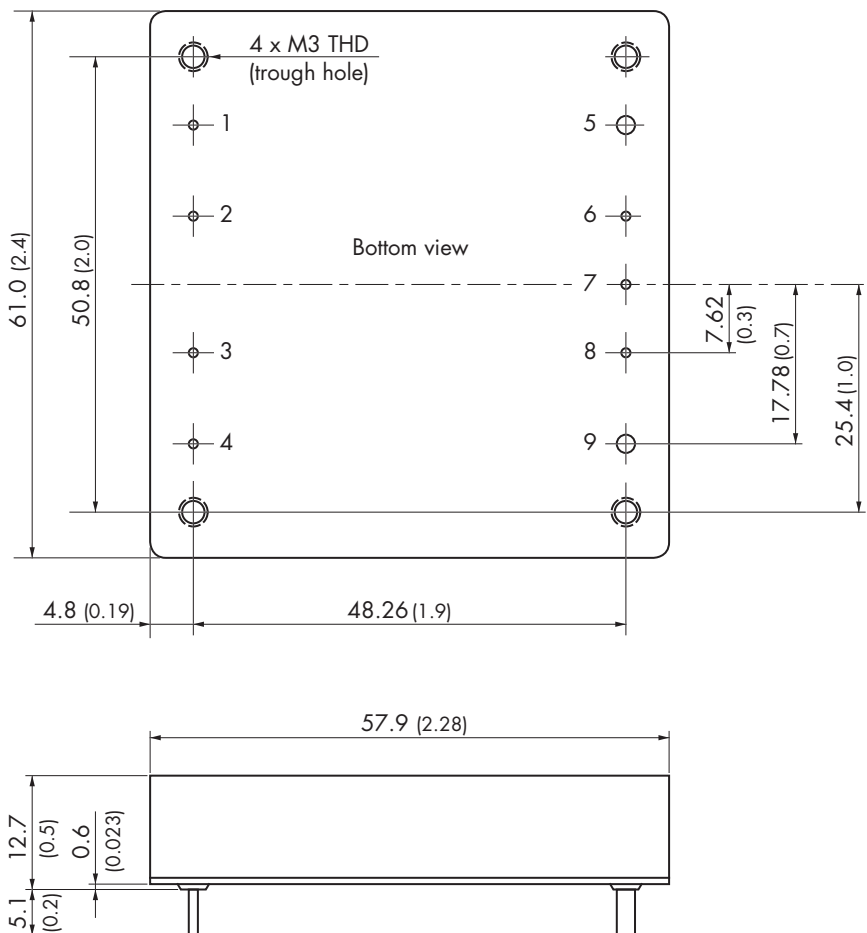

Pinout	
Pin	Function
1	-Vin (GND)
2	Case
3	Remote
4	+Vin (Vcc)
5	-Vout
6	-Sense
7	Trim
8	+Sense
9	+Vout

The screw 1 locked torque (24 and 48Vout models):
MAX 5.0kgf-cm/0.49N-m

Dimensions in mm (inch)
Tolerances x.xx \pm 0.5 (\pm 0.02)
Tolerances x.xxx \pm 0.25 (\pm 0.01)
Pin pitch tolerances \pm 0.25 (\pm 0.01)
Pin dimension tolerances \pm 0.1 (\pm 0.004)

Pin diameter pins 5 & 9: 2.0 (0.08)

Pin diameter other pins: 1.0 (0.04)