

ZPSA40 & 60 Series

2" x 4" 40W to 60W
AC-DC Power Supplies

- Single and Multiple Outputs
- Wide Range AC Input
- Low Profile, Industry Standard Footprint
- Global Safety Agency Compliance
- RoHS Compliant

Key Market Segments & Applications

- Video/Audio Routers
- Datacom
- Point of Sale
- Test and Measurement
- LED Signs and Lighting

ZPSA40 & 60 Features and Benefits

Features

- Industry Standard Footprint
- Up to 88% efficiency
- Broad Product Range
- Meets EN61000-4 Immunity

Benefits

- Available to Second Source
- Less System Heating
- Optimization of Power Supply to System
- Greater Reliability

Specifications

ITEMS	MODEL	ZPSA40	ZPSA60
Input Voltage range	-	90 - 264VAC (47 - 440Hz) or 120 - 370VDC	
Inrush Current (132/265VAC)	A	25 / 50	
Input Current (115/230VAC)	A	< 1.2A	< 1.4A
Leakage Current	mA	0.8mA max (264VAC, 60Hz)	
Temperature Coefficient	-	±0.05%/°C	
Voltage Accuracy	-	±1%	
Minimum Load	A	None	
Load Regulation	-	±1%	
Line Regulation	-	±0.5%	
Ripple & Noise (1)	mV	1% or 50mV whichever is greater	
Short Circuit Protection	-	Continuous - hiccup mode	
Overvoltage Protection	V	Typically 110-130% of nominal	
Hold Up Time (Typ)	ms	8ms at 115VAC input	
LED Indicator	-	Green LED = OK	
Operating Temperature	-	0 to +70°C with derating	
Storage Temperature	-	-20 to +85°C	
Humidity (non condensing)	-	10 - 95% RH	
Cooling	-	Convection	
Withstand Voltage	-	Input to Ground 1.5kVAC, Input to Output 3kVAC, Output to Ground 500VAC for 1 min.	
Isolation Resistance	-	>100MΩ at 25C & 70%RH, Output to Ground 500VDC	
Vibration (non operating)	-	23.52m/s ² (10 - 55Hz: constant sweep 1 min X, Y, Z for 1 hour)	
Shock	-	< 196.1 m/s ² (20G)	
Safety Agency Approvals	-	UL60950-1, CSA60950-1, EN60950-1 Class I, CE Mark (LVD)	
Conducted & Radiated EMI	-	EN55022-B, FCC Class B	
Immunity	-	EN61000-4-2,-3,-4,-5,-6,-8	
Weight (Typ)	g	130g	
Size (WxLxH)	mm	101.6 X 50.8 X 27.1 (including underside components)	
Warranty	yrs	2	

Notes: (1) Measured with 0.1μF ceramic & 10μF electrolytic at 20MHz BW



Model Selector

Model		Output Voltage (V)	Maximum Output (A)	Peak Load (A) (2)	Output Power (W)	Efficiency (typ)%
ZPSA40-3R3	V1	3.3	6.0	7.2	20.0	74
ZPSA60-3R3	V1	3.3	8.0	8.5	26.0	74
ZPSA40-5	V1	5.0	6.0	7.2	30.0	79
ZPSA60-5	V1	5.0	8.0	9.0	40.0	79
ZPSA40-9	V1	9.0	4.45	5.34	40.0	83
ZPSA60-9	V1	9.0	6.67	8.0	60.0	83
ZPSA40-12	V1	12.0	3.34	4.0	40.0	85
ZPSA60-12	V1	12.0	5.0	6.0	60.0	85
ZPSA40-15	V1	15.0	2.67	3.2	40.0	85
ZPSA60-15	V1	15.0	4.0	4.8	60.0	85
ZPSA40-24	V1	24.0	1.67	2.0	40.0	86
ZPSA60-24	V1	24.0	2.5	3.0	60.0	86
ZPSA40-28	V1	28.0	1.43	1.71	40.0	86
ZPSA60-28	V1	28.0	2.14	2.57	60.0	86
ZPSA40-30	V1	30.0	1.33	1.6	40.0	87
ZPSA60-30	V1	30.0	2.0	2.4	60.0	87
ZPSA40-36	V1	36.0	1.11	1.33	40.0	87
ZPSA60-36	V1	36.0	1.67	2.0	60.0	87
ZPSA40-48	V1	48.0	0.834	1.0	40.0	88
ZPSA60-48	V1	48.0	1.25	1.5	60.0	88

Notes: (2) Average not to exceed max power, <30s, 10% duty cycle


Derating Curve ZPSA40 & 60 Series

**INTERMEDIATE VOLTAGES AVAILABLE
PLEASE CONSULT SALES**

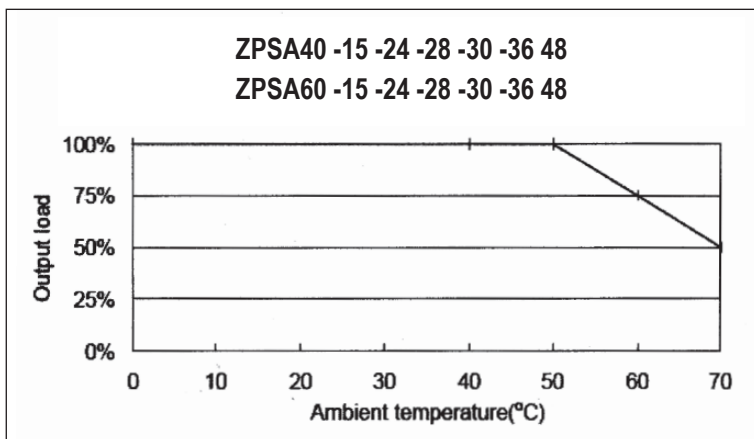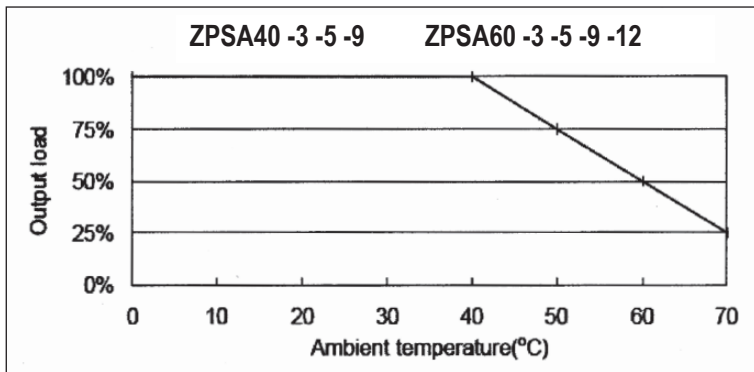

Outline Drawing ZPSA40 & 60 Series

Note: All Dimensions are in inches (mm)
 Tolerances: $XX \pm 0.2$ ($.XX \pm .5$) unless otherwise noted

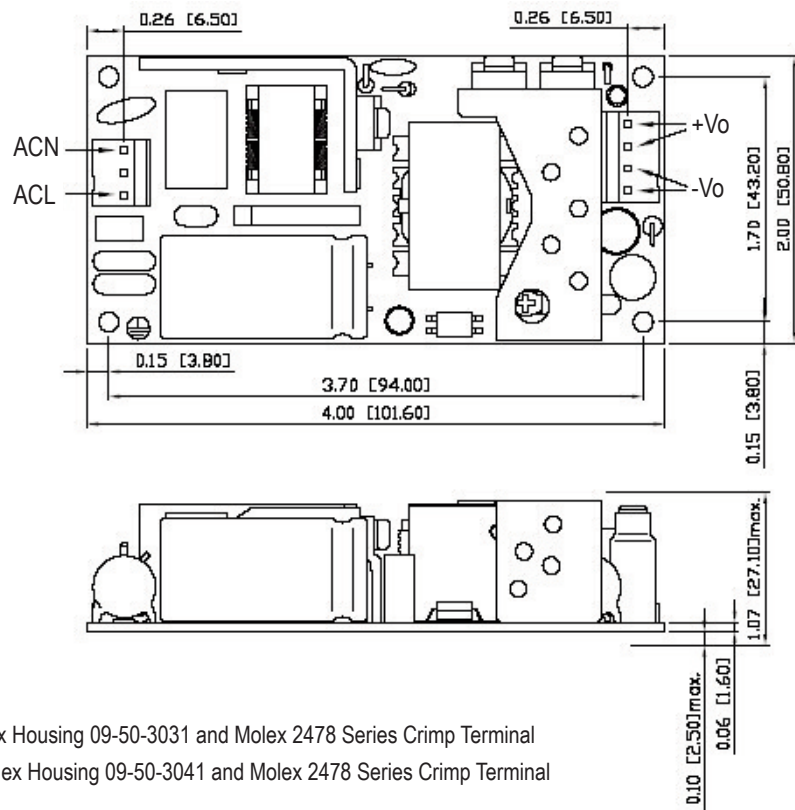

Options	
Suffix	Description
Blank	Molex connectors
/P	PCB mount pins

TDK-LAMBDA EMEA

www.emea.tdk-lambda.com



TDK-Lambda France SAS

Route de Grivery
ZAC des Delaches
CS 41077
91978 Courtaboeuf Cedex
France
Tel: +33 1 60 12 71 65
Fax: +33 1 60 12 71 66
france@fr.tdk-lambda.com
www.fr.tdk-lambda.com



Italy Sales Office
Via dei Lavoratori 128/130
20092 Cinisello Balsamo (MI)
Italy
Tel: +39 02 61 29 38 63
Fax: +39 02 61 29 09 00
info.italia@it.tdk-lambda.com
www.it.tdk-lambda.com



TDK-Lambda Germany GmbH

Karl-Bold-Strasse 40
77855 Achern
Germany
Tel: +49 7841 666 0
Fax: +49 7841 5000
info.germany@de.tdk-lambda.com
www.de.tdk-lambda.com



Austria Sales Office
Aredstrasse 22
2544 Leobersdorf
Austria
Tel: +43 2256 655 84
Fax: +43 2256 645 12
info.germany@de.tdk-lambda.com
www.de.tdk-lambda.com



TDK-Lambda UK Ltd.

Kingsley Avenue
Ilfracombe
Devon EX34 8ES
United Kingdom
Tel: +44 (0) 12 71 85 66 66
Fax: +44 (0) 12 71 86 48 94
powersolutions@uk.tdk-lambda.com
www.uk.tdk-lambda.com



Nemic Lambda Ltd.

Kibbutz
Givat Hashlosha 48800
Israel
Tel: +9 723 902 4333
Fax: +9 723 902 4777
info@nemic.co.il
www.nemic.co.il



Russia

Technical Support:
St Petersburg
Tel: +7 (812) 6580463
Sales:
Moscow
Tel: +7 (499) 7557732
info@tdk-lambda.ru
www.tdk-lambda.ru

LOCAL DISTRIBUTION

